



Hydraulic Seals





WARNING: These products can expose you to chemicals including carbon black (airborne and extracts), antimony trioxide, titanium dioxide, silica (crystalline), di(2-ethylhexyl)phthalate, ethylene thiourea, acrylonitrile, 1,3-butadiene, epichlorohydrin, toluenediisocyanate, tetrafluoroethylene, ethylbenzene, formaldehyde, furfuryl alcohol, glass fibers, methyl isobutyl ketone, nickel (metallic and compounds), lead and lead compounds which are known to the State of California to cause cancer; and 1,3-butadiene, epichlorohydrin, di(2-ethylhexyl)phthalate, di-isodecyl phthalate, ethylene thiourea, methyl isobutyl ketone, methanol, toluene, lead and lead compounds which are known to the State of California to cause birth defects and other reproductive harm. For more information go to www.P65Warnings.ca.gov

Precision seals for hydraulics

Elastomer seals are functionally reliable components of fluid engineering equipment and systems. Their advanced level of sealing technology is the result of many years of development and field experience gained in the various sectors of mechanical engineering. Hydraulic sealing systems are used in a wide range of different applications, from construction machinery, which has to perform under toughest pressure, temperature and media conditions, all the way to industrial water hydraulics in pressure intensifiers operating under extreme requirements with regard to lubrication, wear and corrosion.

Parker Hannifin offers a comprehensive product range to manufacturers of hydraulics equipment, based on decades of experience in sealing technology. Our application engineering consulting service assists customers with the selection of the suitable seal geometry and optimum compound. Our compound labs develop new materials and modify existing compounds for new areas of application. Computer-aided simulation and analytical tools allow us to predict the functional performance characteristics and service life of our products, thus reducing development times and costs. Our extensive physical lab facilities are used for testing sealing elements and systems under conditions resembling their use in the field.

An extensive portfolio of sealing profiles, compounds and dimensions enables design engineers to find the suitable sealing system for any application. Our standard range is complemented by a host of special developments, created in close collaboration with our customers.

The profile series presented in this catalogue consider existing ISO standards for installation spaces of piston seals, rod seals and wipers. The concrete contributions which Parker engineers continually make through their membership in respective standardisation committees ensure that the dimensional standards established for these series conform to field requirements, now and in future.



Parker's safety programme

Warning - user responsibility

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalogue and in any materials provided by Parker or its subsidiaries or authorized distributors. To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and responsibly foreseeable uses of the components or systems.

Range of application

Our seals may only be used within the application parameters stated in our documents as regards compatibility with contact media, pressures, temperatures and time of storage. Application or use outside of the specified application parameters as well as the selection of different compounds by mistake may result in damage to life, the environment and/or equipment and facilities.

The information contained in our publications is based on know-how developed over decades of experience in the manufacturing and application of seals. Despite this experience, unknown factors arising out of the practical application of seals may considerably affect the overall applicability of this information in such a way that the recommendations provided herein are not to be considered generally binding.

The data for operating pressure, operating temperature, and surface speed stated in the columns represent maximum values and are interrelated. Under extreme working conditions it is recommended not to use all maximum values simultaneously.

For special requirements (pressure, temperature, speed, etc.) please contact our consultancy service, so that suitable materials and/or designs can be recommended.

Compatibility of seals and operating media / cleaning agents

Due to the great diversity of operational parameters affecting fluidic devices and their impact on seals, it is absolutely imperative that manufacturers of these devices approve seals for functional and operational suitability under field conditions.

Furthermore, in view of the consistent increase of newly available media used as hydraulic oils, lubricants, and cleaning agents, special attention is invited to the aspect of compatibility with sealing elastomers currently in use.

Additives contained in base media in order to enhance certain functional characteristics may affect compatibility characteristics of sealing materials.

For this reason, it is imperative that any product equipped with our seals be tested for compatibility with operational media or cleaning agents approved or specified by you either at your plant or by means of field tests prior to any field use.

We kindly ask you to comply with this notice since, as a manufacturer of seals, we are not in a position, as a matter of principle, to perform simulations of any and all conditions present in the final application nor of knowing the composition of the operational media and cleaning agents used.

Design modifications

We reserve the right to make design modifications without prior notification.

Prototypes and samples

Prototypes and samples are produced from experimental moulds. The subsequent series production may differ in terms of production techniques from the prototype production unless specific agreement to the contrary was reached beforehand.

Delivery and services

The delivery guarantee (availability of moulds) for individual dimensions of our range of products is limited to a period of 7 years.

Damaged moulds, including standard items, can only be replaced in case of sufficient demand. Most of the dimensions stated in this catalogue are normally (but not as a matter of course) available ex stock.

For the production of smaller quantities, special compounds, and in case of special production procedures, we reserve the right of charging a prorated share of set-up costs.

All deliveries and services are subject to our terms.

Quality systems

Our manufacturing sites are certified according to ISO 9001 and/or ISO/TS 16949 and/or EN9100.

Copyright

All rights reserved by Parker Hannifin Corporation. Extracts may only be taken with permission. Modification rights reserved.

Validity


This edition supersedes all prior documents.

| Contents | |
|--|------------|
| General information | 6 |
| Sealing systems in typical applications | 6 |
| Sealing compounds for fluid technology | 8 |
| General installation guidelines for piston seals | 20 |
| General installation guidelines for rod seals | 22 |
| Maximum gap allowance | 24 |
| Wipers | 27 |
| Guiding elements | 53 |
| Rod seals | 77 |
| Piston seals | 109 |
| Other seal products | 135 |
| O-rings | 136 |
| Anti-extrusion rings | 142 |
| Static radial seal | 145 |
| Flange seals | 147 |
| Rotary seals | 150 |
| Sealing sets for piston accumulators | 159 |


Sealing systems in typical applications

Mobile hydraulics


Excavator

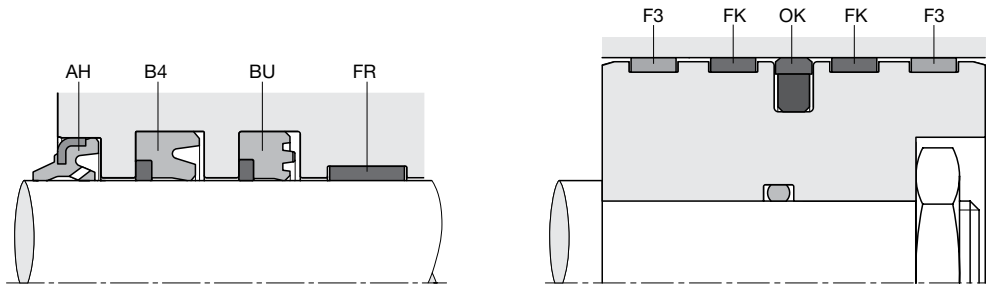


Mini excavator

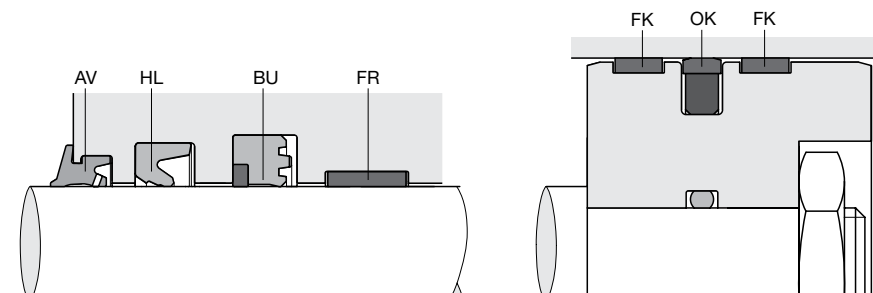


Wheel loader

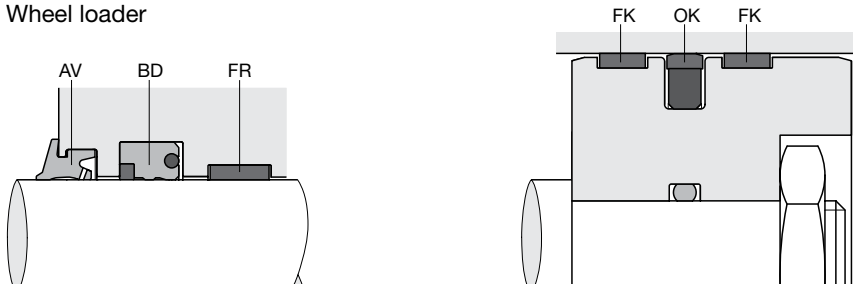



Bulldozer

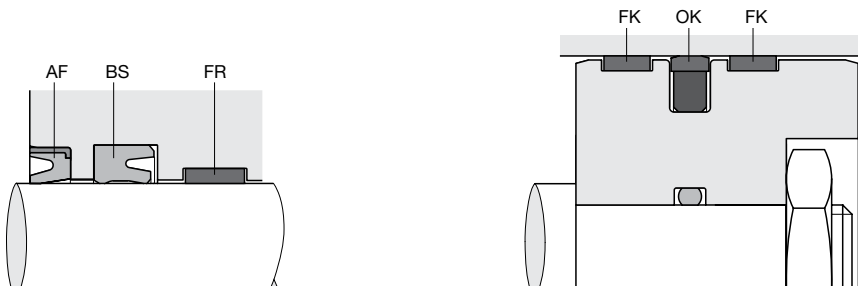



Backhoe

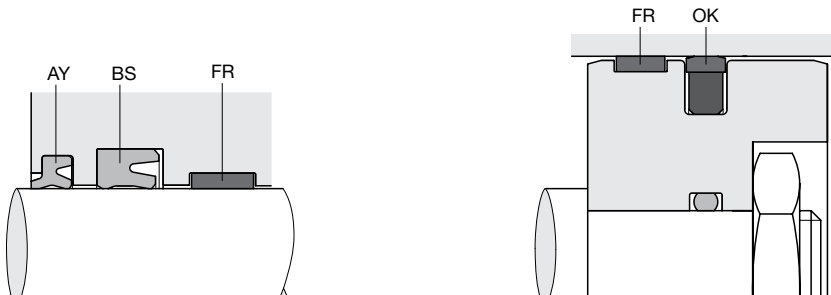

Fork lift





Skid steer





Stationary hydraulics



Industrial cylinder

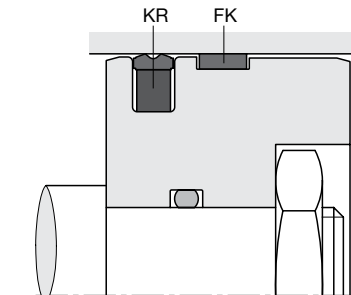

Machine tool



Injection moulding machine

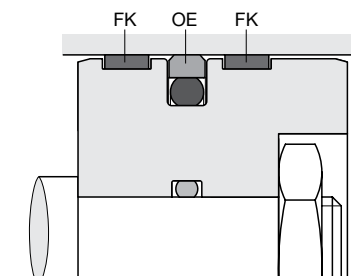

Sealing compounds for fluid technology

| Application | | | | | | | | | | | | | | Standards | Remarks |
|-------------|-------|-----------------|-------|------|------------|-------------|------------|------------|--------|-------------|-----|-----------|----------------|--|--|
| HFD | Water | Com-pressed air | Acids | Lyes | Hydraulics | Pneumat-ics | Automotive | Industrial | Mining | oil and gas | Gas | Food, CPI | Drinking water | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | • KTW, WRAS, W 270,EN 681-1 and W 534, KI-WA, NFS 61 and ACS | • standard for drinking water applications |
| | | | | | | | | | | | | | | | • high tear resistance • high tensile strength • Adblue® resistant |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | • for bonded seals (rubber/metal, etc.) • improved chemical resistance |
| | | | | | | | | | | | | | | | • low-temperature compound |
| | | | | | | | | | | | | | | | • wear-resistant • for shock absorber applications |
| | | | | | | | | | | | | | | | • exhaust gas • acetic acid resistant • resistant to condensate • suitable for biodiesel (RME) applications • Fuels containing ethanol (E85) |
| | | | | | | | | | | | | | | | • for bonded seals (rubber/metal, etc.) |
| | | | | | | | | | | | | | | | • for bonded seals (rubber/metal, etc.) |
| | | | | | | | | | | | | | | | • suitable for sealing plastic parts |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |

Sealing compounds for fluid technology

| Compound code | Polymer base | Shore Hardness ¹⁾ | Colour | Temperature range ²⁾ (°C) | | | T-On-set (°C) | TR 10 (°C) | Media compatibility | | | | | | | | | |
|---------------|--------------|------------------------------|--------|--------------------------------------|------|-------|---------------|------------|---------------------|------------------------|------|------|------|------|------------|-----------------|-----|--|
| | | | | min. | max. | short | | | Mineral oil | Poly- α -Olefin | HEPR | HEPG | HETG | HEES | DOT-3 / -4 | HFAE, HFAS, HFB | HFC | |

Rubber resistant to mineral oil

| | | | | | | | | | | | | | | | | | | |
|-------|----------|-------------|--------------|-----|------|-----|-------|--|---|---|---|---|---|---|---|---|---|---|
| N3854 | NBR | 70A \pm 5 | black | -30 | +100 | 120 | < -19 | | . | . | . | . | . | . | . | . | . | . |
| N8602 | NBR | 70A \pm 5 | black | -50 | +80 | 100 | < -45 | | . | . | . | . | . | . | . | . | . | . |
| N8604 | NBR | 70A \pm 5 | black | -30 | +100 | 120 | < -21 | | . | . | . | . | . | . | . | . | . | . |
| N3566 | NBR | 75A \pm 5 | yellow-brown | -20 | +100 | 120 | < -5 | | . | . | . | . | . | . | . | . | . | . |
| N3578 | NBR | 75A \pm 5 | black | -30 | +100 | 120 | < -23 | | . | . | . | . | . | . | . | . | . | . |
| N3771 | NBR | 80A \pm 5 | black | -15 | +100 | 120 | < -25 | | . | . | . | . | . | . | . | . | . | . |
| N3580 | NBR | 80A \pm 5 | brown | -25 | +80 | 100 | < -18 | | . | . | . | . | . | . | . | . | . | . |
| N9148 | NBR | 75A \pm 5 | black | -30 | +100 | 130 | < -30 | | . | . | . | . | . | . | . | . | . | . |
| N8603 | NBR | 80A \pm 5 | black | -25 | +100 | 120 | < -18 | | . | . | . | . | . | . | . | . | . | . |
| N8613 | NBR | 80A \pm 5 | black | -50 | +80 | 100 | < -45 | | . | . | . | . | . | . | . | . | . | . |
| N3584 | NBR | 80A \pm 5 | black | -25 | +100 | 120 | < -20 | | . | . | . | . | . | . | . | . | . | . |
| N9150 | NBR | 70A \pm 5 | black | -35 | +120 | 135 | < -25 | | . | . | . | . | . | . | . | . | . | . |
| N3582 | NBR | 85A \pm 5 | brown | -10 | +80 | 120 | < -2 | | . | . | . | . | . | . | . | . | . | . |
| N3589 | NBR | 85A \pm 5 | black | -20 | +100 | 120 | < -15 | | . | . | . | . | . | . | . | . | . | . |
| N3763 | NBR | 85A \pm 5 | brown | -25 | +100 | 120 | < -20 | | . | . | . | . | . | . | . | . | . | . |
| N3544 | NBR | 90A \pm 5 | black | -25 | +100 | 120 | < -18 | | . | . | . | . | . | . | . | . | . | . |
| N3587 | NBR | 90A \pm 5 | black | -25 | +100 | 120 | < -10 | | . | . | . | . | . | . | . | . | . | . |
| N3764 | NBR | 90A \pm 5 | brown | -10 | +100 | 120 | < -4 | | . | . | . | . | . | . | . | . | . | . |
| N1173 | HNBR | 75A \pm 5 | black | -25 | +150 | 170 | < -20 | | . | . | . | . | . | . | . | . | . | . |
| N8615 | HNBR/NBM | 70A \pm 5 | black | -25 | +130 | 150 | < -22 | | . | . | . | . | . | . | . | . | . | . |
| N3573 | HNBR/NBM | 75A \pm 5 | black | -20 | +150 | 170 | < -16 | | . | . | . | . | . | . | . | . | . | . |
| N9192 | HNBR | 80A \pm 5 | grey | -35 | +130 | 150 | < -35 | | . | . | . | . | . | . | . | . | . | . |
| KB163 | | | | | | | | | | | | | | | | | | |
| KA183 | HNBR | 85A \pm 5 | black | -30 | +130 | 150 | < -35 | | . | . | . | . | . | . | . | . | . | . |
| N9182 | HNBR | 75A \pm 5 | black | -30 | +130 | 150 | < -25 | | . | . | . | . | . | . | . | . | . | . |
| N3510 | HNBR/NBM | 85A \pm 5 | black | -20 | +150 | 170 | < -18 | | . | . | . | . | . | . | . | . | . | . |
| N3512 | HNBR/NBM | 90A \pm 5 | black | -20 | +150 | 170 | < -16 | | . | . | . | . | . | . | . | . | . | . |
| N8526 | HNBR/NBM | 90A \pm 5 | black | -20 | +150 | 170 | < -16 | | . | . | . | . | . | . | . | . | . | . |
| N8557 | HNBR | 75A \pm 5 | black | -35 | +130 | 150 | < -35 | | . | . | . | . | . | . | . | . | . | . |

For specific requirements, special compounds are available. Please contact our consultancy service.

- 1) Hardness values are average values, measured on standard specimen of 6 mm thickness acc. to DIN 53505. On finished parts, only micro hardness (IRHD-M) can typically be measured, which leads to different results.
- 2) The minus temperatures are provided as a general guideline only because functionality at low temperatures depends on seal design, operating conditions and the condition of adjoining metal parts. The plus temperatures stated depend on the application. They may be exceeded but will reduce service life accordingly. Short-term operation without loads, e.g. during painting processes, above the temperature limit is permissible. Long-term operation above the temperature limit will reduce service life. The use of aggressive media intensifies the degradation process.

Sealing compounds for fluid technology

| Application | | | | | | | | | | | | | | Standards | Remarks | |
|-------------|-------|-----------------|-------|------|------------|-------------|------------|------------|--------|-------------|-----|-----------|----------------|-----------|--|--|
| HFD | Water | Com-pressed air | Acids | Lyes | Hydraulics | Pneumat-ics | Automotive | Industrial | Mining | oil and gas | Gas | Food, CPI | Drinking water | | | |
| | | | | | | | | | | | | | | | • KTW | |
| | | | | | | | | | | | | | | | • limited ozone resistance acc. to ISO 1431-1, procedure B | • good low-temperature resistance |
| | | | | | | | | | | | | | | | • limited ozone resistance acc. to DIN 53509/1 | |
| | | | | | | | | | | | | | | | • DVGW | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | • heating oils |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | • limited ozone resistance acc. to ISO 1431-1, procedure B | • good low-temperature resistance • air brakes |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | • suitable for sealing non-ferrous metal and plastic parts |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | • only for wipers |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | • suitable for R134a, HFO 1234yf |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | • Adblue® resistant |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | • good low-temperature resistance • NORSOK M-710 compliant • Adblue® resistant |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | • outstanding wear resistance |
| | | | | | | | | | | | | | | | | • central hydraulics media |

Sealing compounds for fluid technology

| Application | | | | | | | | | | | | | | Standards | Remarks | |
|-------------|-------|-----------------|-------|------|------------|-------------|------------|------------|--------|-------------|-----|-----------|----------------|-----------|---------|--|
| HFD | Water | Com-pressed air | Acids | Lyes | Hydraulics | Pneumat-ics | Automotive | Industrial | Mining | oil and gas | Gas | Food, CPI | Drinking water | | | |
| | | | | | | | | | | | | | | | | • low gas permeability |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | • high-pressure cleaners |
| | | | | | | | | | | | | | | | | • high-pressure cleaners |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | • high-pressure cleaners |
| | | | | | | | | | | | | | | | | • high-pressure cleaners |
| | | | | | | | | | | | | | | | | • high-pressure cleaners |
| | | | | | | | | | | | | | | | | • aramid fabrics |
| | | | | | | | | | | | | | | | | • excellent high-temperature behaviour • excellent dynamic behaviour |
| | | | | | | | | | | | | | | | | • FDA • good hydrolysis resistance |
| | | | | | | | | | | | | | | | | • exceeds VDMA Guideline 24568 for high-performance hydraulic oils of water hazard class 0 • good hydrolysis resistance |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | • excellent low-temperature behaviour |
| | | | | | | | | | | | | | | | | • friction-optimized • very good wear resistance • central hydraulics media |
| | | | | | | | | | | | | | | | | • very good extrusion resistance • low friction • good hydrolysis resistance |

Sealing compounds for fluid technology

| Compound code | Polymer base | Shore Hardness ¹⁾ | Colour | Temperature range ²⁾ (°C) | | | T-On-set (°C) | TR 10 (°C) | Media compatibility | | | | | | | | | |
|---------------|--------------|------------------------------|--------|--------------------------------------|------|-------|---------------|------------|---------------------|------------------------|------|------|------|------|------------|-----------------|-----|--|
| | | | | min. | max. | short | | | Mineral oil | Poly- α -Olefin | HEPR | HEPG | HETG | HEES | DOT-3 / -4 | HFAE, HFAS, HFB | HFC | |

O-ring compounds for Slipper Seals®

| | | | | | | | | | | | | | | | | | | |
|-------|------|-------------|-------|-----|------|-----|-------|--|---|---|---|---|---|---|---|---|---|---|
| N0674 | NBR | 70A \pm 5 | black | -30 | +100 | 120 | < -22 | | . | . | . | . | . | . | . | . | . | . |
| V0747 | FKM | 75A \pm 5 | black | -20 | +200 | 230 | < -10 | | . | . | . | . | . | . | . | . | . | . |
| N0756 | NBR | 75A \pm 5 | black | -50 | +110 | 120 | < -40 | | . | . | . | . | . | . | . | . | . | . |
| E0540 | EPDM | 80A \pm 5 | black | -40 | +150 | 170 | < -45 | | . | . | . | . | . | . | . | . | . | . |
| N3578 | NBR | 75A \pm 5 | black | -30 | +110 | 120 | < -26 | | . | . | . | . | . | . | . | . | . | . |

Polon® compounds

| | | | | | | | | | | | | | | | | | | |
|-----|--|--|------------|------|------|--|--|--|---|---|---|---|---|---|---|---|---|---|
| 001 | Virgin PTFE | | white | -190 | +230 | | | | . | . | . | . | . | . | . | . | . | . |
| 003 | Virgin TFM | | white | -190 | +230 | | | | . | . | . | . | . | . | . | . | . | . |
| 012 | modified PTFE | | dark green | -190 | +230 | | | | . | . | . | . | . | . | . | . | . | . |
| 025 | PTFE + 15 % glas fibre | | dark green | -190 | +290 | | | | . | . | . | . | . | . | . | . | . | . |
| 031 | PTFE + 15 % carbon | | black | -190 | +290 | | | | . | . | . | . | . | . | . | . | . | . |
| 030 | PTFE + 23 % carbon + 2 % graphite | | black | -190 | +315 | | | | . | . | . | . | . | . | . | . | . | . |
| 033 | PTFE + 25 % carbon | | black | -190 | +315 | | | | . | . | . | . | . | . | . | . | . | . |
| 044 | PTFE + 15 % graphite | | black | -190 | +230 | | | | . | . | . | . | . | . | . | . | . | . |
| 052 | PTFE + 40 % bronze | | bronze | -156 | +260 | | | | . | . | . | . | . | . | . | . | . | . |
| 062 | PTFE + 60 % bronze | | bronze | -156 | +260 | | | | . | . | . | . | . | . | . | . | . | . |

For specific requirements, special compounds are available. Please contact our consultancy service.

- 1) Hardness values are average values, measured on standard specimen of 6 mm thickness acc. to DIN 53505. On finished parts, only micro hardness (IRHD-M) can typically be measured, which leads to different results.
- 2) The minus temperatures are provided as a general guideline only because functionality at low temperatures depends on seal design, operating conditions and the condition of adjoining metal parts. The plus temperatures stated depend on the application. They may be exceeded but will reduce service life accordingly. Short-term operation without loads, e.g. during painting processes, above the temperature limit is permissible. Long-term operation above the temperature limit will reduce service life. The use of aggressive media intensifies the degradation process.

Sealing compounds for fluid technology

| Application | | | | | | | | | | | | | | Standards | | Remarks | |
|-------------|-------|-----------------|-------|------|------------|-------------|------------|------------|--------|-------------|-----|-----------|----------------|-----------|--|---------|---|
| HFD | Water | Com-pressed air | Acids | Lyes | Hydraulics | Pneumat-ics | Automotive | Industrial | Mining | oil and gas | Gas | Food, CPI | Drinking water | | | | |
| | | | | | | | | | | | | | | | | | • standard O-ring compound for slipper seals® |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | • very good chemical resistance |
| | | | | | | | | | | | | | | | | | • very good chemical resistance |
| | | | | | | | | | | | | | | | | | • high mechanical strength |
| | | | | | | | | | | | | | | | | | • improved wear resistance |
| | | | | | | | | | | | | | | | | | • very good chemical resistance |
| | | | | | | | | | | | | | | | | | • very good creep resistance |
| | | | | | | | | | | | | | | | | | • electrical properties like virgin PTFE |
| | | | | | | | | | | | | | | | | | • for medium mechanical loads |
| | | | | | | | | | | | | | | | | | • for hard sealing surfaces |
| | | | | | | | | | | | | | | | | | • water / oil emulsions |
| | | | | | | | | | | | | | | | | | • chemical resistance limited by carbon |
| | | | | | | | | | | | | | | | | | • very good wear resistance |
| | | | | | | | | | | | | | | | | | • very good creep resistance |
| | | | | | | | | | | | | | | | | | • for high mechanical loads |
| | | | | | | | | | | | | | | | | | • for water and oil hydraulics |
| | | | | | | | | | | | | | | | | | • very good wear resistance |
| | | | | | | | | | | | | | | | | | • very good creep resistance |
| | | | | | | | | | | | | | | | | | • for low mechanical loads |
| | | | | | | | | | | | | | | | | | • for soft sealing surfaces |
| | | | | | | | | | | | | | | | | | • chemical resistance limited by graphite |
| | | | | | | | | | | | | | | | | | • outstanding wear resistance |
| | | | | | | | | | | | | | | | | | • outstanding creep resistance |
| | | | | | | | | | | | | | | | | | • for high mechanical loads |
| | | | | | | | | | | | | | | | | | • outstanding wear resistance |
| | | | | | | | | | | | | | | | | | • outstanding creep resistance |
| | | | | | | | | | | | | | | | | | • for high mechanical loads |

Sealing compounds for fluid technology

| Compound code | Polymer base | Shore Hardness ¹⁾ | Colour | Temperature range ²⁾ (°C) | | | T-On-set (°C) | TR 10 (°C) | Media compatibility | | | | | | | | | |
|---------------|--------------|------------------------------|--------|--------------------------------------|------|-------|---------------|------------|---------------------|------------------------|------|------|------|------|------------|-----------------|-----|--|
| | | | | min. | max. | short | | | Mineral oil | Poly- α -Olefin | HEPR | HEPG | HETG | HEES | DOT-3 / -4 | HFAE, HFAS, HFB | HFC | |

Polon® compounds

| | | | | | | | | | | | | | | | | | | |
|-----|--------------------------------|-------------|--------------------------|------|------|--|--|--|---|---|---|---|---|---|---|---|---|---|
| 067 | PTFE + 10 % ekonol | | beige | -260 | +320 | | | | . | . | . | . | . | . | . | . | . | . |
| 074 | PTFE + 10 % carbon fibre | | greyish | -260 | +310 | | | | . | . | . | . | . | . | . | . | . | . |
| 083 | TPU | 72D \pm 5 | yellow, trans- parent | -20 | +100 | | | | . | . | . | . | . | . | . | . | . | . |
| 006 | UHMW-PE | | white | -200 | +80 | | | | . | . | . | . | . | . | . | . | . | . |
| 331 | PVDF | | white/yellow | -30 | +140 | | | | . | . | . | . | . | . | . | . | . | . |

For specific requirements, special compounds are available. Please contact our consultancy service.

- 1) Hardness values are average values, measured on standard specimen of 6 mm thickness acc. to DIN 53505. On finished parts, only micro hardness (IRHD-M) can typically be measured, which leads to different results.
- 2) The minus temperatures are provided as a general guideline only because functionality at low temperatures depends on seal design, operating conditions and the condition of adjoining metal parts. The plus temperatures stated depend on the application. They may be exceeded but will reduce service life accordingly. Short-term operation without loads, e.g. during painting processes, above the temperature limit is permissible. Long-term operation above the temperature limit will reduce service life. The use of aggressive media intensifies the degradation process.

Sealing compounds for fluid technology

| Application | | | | | | | | | | | | | | Standards | Remarks | |
|-------------|-------|-----------------|-------|------|------------|-------------|------------|------------|--------|-------------|-----|-----------|----------------|-----------|---------|---|
| HFD | Water | Com-pressed air | Acids | Lyes | Hydraulics | Pneumat-ics | Automotive | Industrial | Mining | oil and gas | Gas | Food, CPI | Drinking water | | | |
| . | . | . | . | . | . | . | . | . | . | . | . | . | . | | | <ul style="list-style-type: none"> • for medium mechanical loads • for soft sealing surfaces • limited chemical resistance • limited usability in hot water |
| . | . | . | . | . | . | . | . | . | . | . | . | . | . | | | <ul style="list-style-type: none"> • for short strokes with high frequency • very good wear resistance in water • suitable for sea water |
| . | . | . | . | . | . | . | . | . | . | . | . | . | . | | | <ul style="list-style-type: none"> • very good wear resistance • for high mechanical loads |
| . | . | . | . | . | . | . | . | . | . | . | . | . | . | | | <ul style="list-style-type: none"> • outstanding wear resistance in water and air |
| . | . | . | . | . | . | . | . | . | . | . | . | . | . | | | <ul style="list-style-type: none"> • wear resistance like nylon • suitable for steam sterilisation |

General installation guidelines for piston seals


International (ISO) and national (DIN) standards for seal housing dimensions are in place and should be considered. For seals requiring a special groove, e.g. special seals, valve seals, rotor seals etc., the groove dimensions are stated separately. In general, the surface finishes, leading edge chamfers and dimensions stated here have already proved themselves and will mostly be found in the standards.

We recommend that customers adhere to the tolerances and surface finishes stated in this catalogue. This is a prerequisite for easy, damage-free installation and for the seal to retain the properties stated in this catalogue.

Surfaces: Grinding as final machining process for dynamic sealing surfaces is not sufficient. These surfaces have to be polished afterwards.

Radii: As for the necessary radii (r) please refer to the respective profile data or the applicable standards.

Solid piston

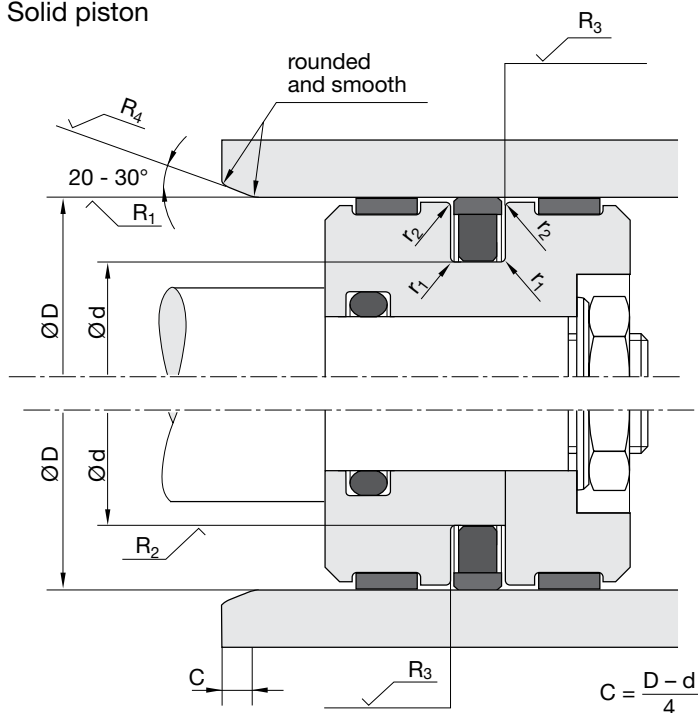

Split piston

Surfaces

Dynamic sealing surfaces

For rubber and PTFE products

$R_1: R_z 1.0 \mu\text{m} / R_a 0.2 \mu\text{m}$

$80 \% \leq *t_{p1} \leq 95 \%$

For polyurethane products

$R_1: R_z 1.6 \mu\text{m} / R_a 0.4 \mu\text{m}$

$60 \% \leq *t_{p1} \leq 80 \%$

Static sealing surfaces

$R_2: R_z 6.3 \mu\text{m} / R_a 0.8 \mu\text{m}$

$*t_{p2} \geq 60 \%$

Non-sealing surfaces and lead-in chamfers

$R_3: R_z 16 \mu\text{m} / R_a 4 \mu\text{m}$


$R_4: R_z 10 \mu\text{m} / R_a 1.6 \mu\text{m}$

* Measured in a depth of 25 % of the R_t -value based on a reference level (zero line) set at 5 % bearing area.

Stretchable seals with tight fit

When seals have a tight fit the piston shoulder diameter can be reduced to ease assembly. By adapting this principal, metal to metal contact, caused by the piston contacting the cylinder wall surface under high transverse loads, is avoided.

Radii: As for the necessary radii please refer to the respective profile data or the applicable standards.

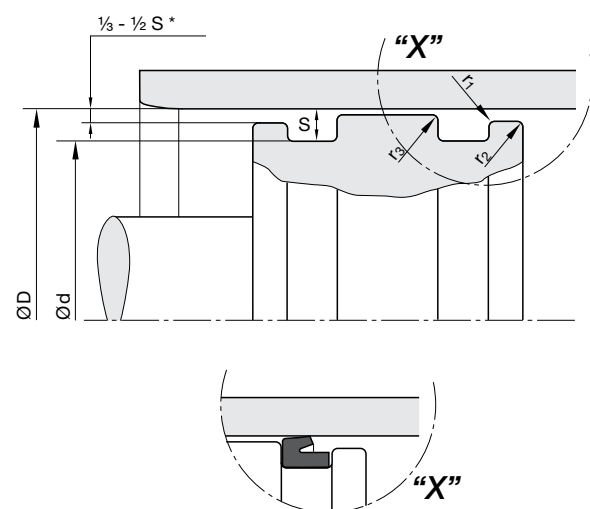

General installation guidelines for piston seals

PTFE seals

Installation guidelines for PTFE seals

The grooves must be carefully cleaned and deburred. The cylinder bore must have a lead-in chamfer. When fitting the piston sealing ring there is always the danger that the ring may tilt and be sheared off by normal lead-in chamfers (see fig.). We therefore recommend that up to a cylinder diameter of 230 mm a lead-in chamfer according to detail "A" is considered. In the case of smaller rings which are especially liable to bending we recommend an open-groove design for diameters smaller than 30 mm.

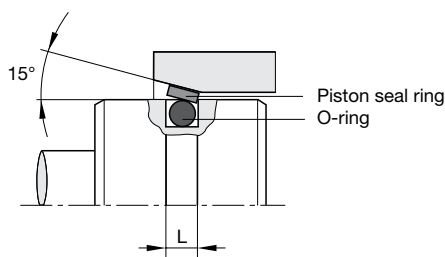


Fig. 1

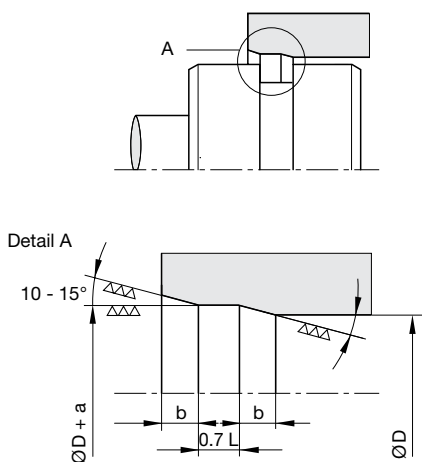


Fig. 2

| Ø D | min. a | max. b |
|-----------|--------|--------|
| ≤ 45 | 0.8 | 2.4 |
| 45 - 175 | 1 | 3 |
| 175 - 230 | 1.5 | 4.5 |

Assembly instruction for PTFE seals

Install the O-ring in the groove as per normal practice. Piston sealing rings of up to 100 mm diameter and wall thickness of over 1.6 mm should be „slowly“ expanded and fitted with an assembly tool (see fig. 3). Larger rings can be expanded by hand. Uneven stretching or overstretching must be avoided under all circumstances.

Should it be necessary to pull the rings over existing guide ring grooves, then these grooves must be covered with plastic tape, or alternatively the expanding mandrel must reach the groove in question (see fig. 3). This ensures that the piston sealing ring does

not snap into the wrong groove. The use of a burnishing shell is recommended when the assembly of a piston is made difficult by an overstretched ring or when the cylinder has an inadequate lead-in chamfer (see fig. 4).

Assembly aids can be manufactured conveniently out of metal. However, in many cases polyamide or POM is also suitable.

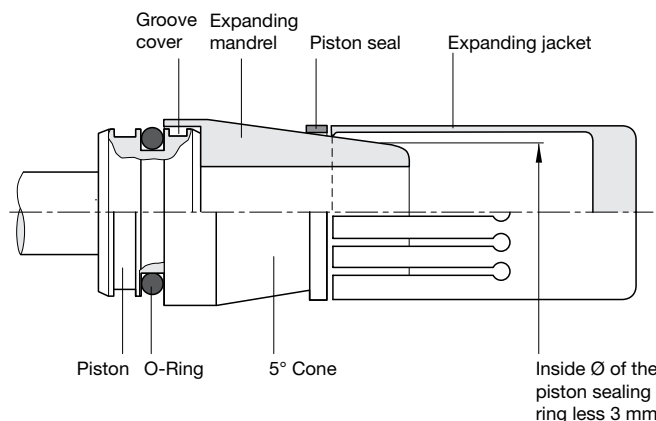


Fig. 3




Fig. 4

General installation guidelines for rod seals


International (ISO) and national (DIN) standards for seal housing dimensions are in place and should be considered. For seals requiring a special groove, e.g. special seals, valve seals, rotor seals etc., the groove dimensions are stated separately. In general, the surface finishes, leading edge chamfers and dimensions stated here have already proved themselves and will mostly be found in the standards.

We recommend that customers adhere to the tolerances and surface finishes stated in this catalogue. This is a prerequisite for easy, damage-free installation and for the seal to retain the properties stated in this catalogue.

Surfaces: Grinding as final machining process for dynamic sealing surfaces is not sufficient. These surfaces have to be polished afterwards.

Radii: As for the necessary radii (r) please refer to the respective profile data or the applicable standards.

Closed groove

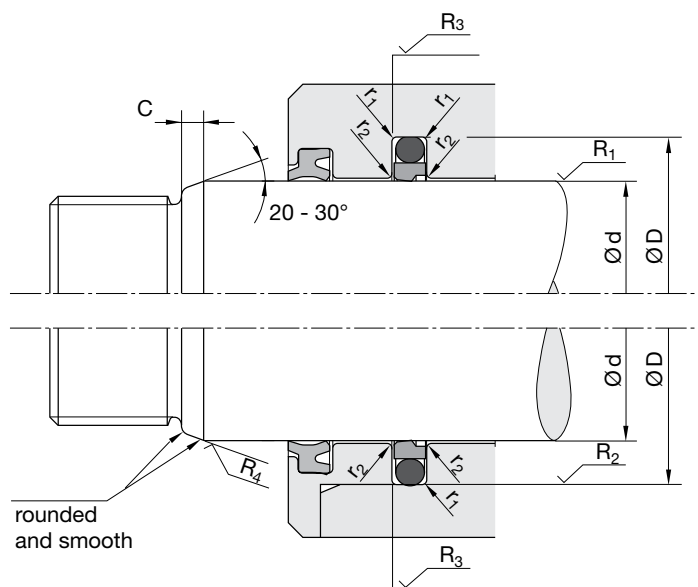

Open groove

$$C = \frac{D - d}{4}$$

Surfaces

Dynamic sealing surfaces

For rubber and PTFE products

$R_1: R_z 1.0 \mu\text{m} / R_a 0.2 \mu\text{m}$

$80 \% \leq *t_{p1} \leq 95 \%$

For polyurethane products

$R_1: R_z 1.6 \mu\text{m} / R_a 0.4 \mu\text{m}$

$60 \% \leq *t_{p1} \leq 80 \%$

Static sealing surfaces

$R_2: R_z 6.3 \mu\text{m} / R_a 0.8 \mu\text{m}$

$*t_{p2} \geq 60 \%$

Non-sealing surfaces and lead-in chamfers

$R_3: R_z 16 \mu\text{m} / R_a 4 \mu\text{m}$

$R_4: R_z 10 \mu\text{m} / R_a 1.6 \mu\text{m}$

* Measured in a depth of 25 % of the R_t -value based on a reference level (zero line) set at 5 % bearing area.

PTFE seals

Installation guidelines for PTFE seals

The grooves must be carefully cleaned and deburred. The rods must have a lead-in chamfer (see picture on previous page).

We recommend open-groove designs for rod diameters smaller than 30 mm as these rings are prone to breaking if deformed as described above.

Assembly instruction for PTFE seals

First the O-ring must be installed in the groove. Then the rod seal should be carefully formed into a kidney shape without sharp bends as shown in fig. 2. This deformed ring is placed in the groove and rounded with the aid of a pin.

Fig. 1: Another type of installation aid. It consists of a metal pin which has a female cone-shaped recess at one of its front-ends. The PTFE ring can be easily placed in the recess by manually deforming it (see fig. 2). Due to the reduced diameter the PTFE ring (still placed on the pin) can now be installed into the groove. After removal of the pin the PTFE ring can be pressed into the groove and re-formed.

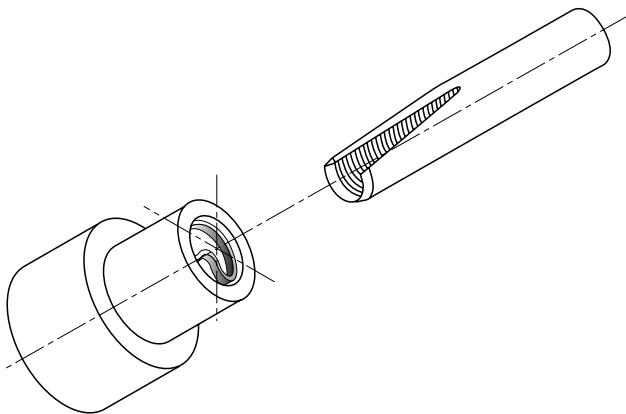


Fig. 1

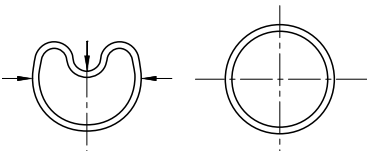


Fig. 2

Maximum gap allowance

Definition

The maximum gap “e”, stated with the respective profile, stands for the maximum gap occurring between rod and guidance resp. between piston and cylinder exhausting all tolerances and maximum eccentricity.

Conditions


1. Surface quality according to our recommendations (see „General Installation Guidelines“)
2. Lubricating fluids

For special conditions, e.g. nonlub fluids, water, acids, alcalies, please contact our consultancy service.

The nomographs in our catalogues have been developed for the „worst case“, that means pushing conditions (for the rod e.g. plunger conditions) and softest material in the corresponding group (e.g. 85 Shore A for polyurethanes and 70 Shore A for NBR).

If the application is not in a pushing mode, the extrusion gap can be increased by 25 %.

If instead of a 85 Shore A polyurethane a 93 Shore material or instead of a 70 Shore NBR a 85 Shore material is used, the extrusion gap can be increased by another 15 % (intermediate values to be balanced).

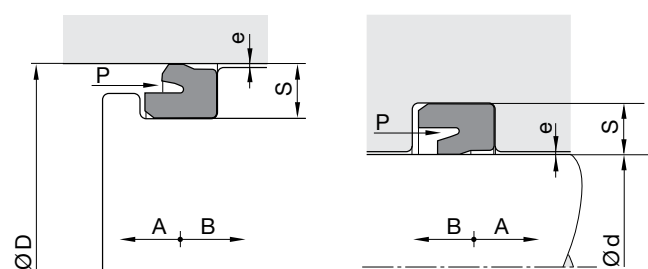

A = pushing
B = pulling

Example 1: Polyurethane seals of Shore A \geq 85 and cotton-reinforced seals

(see following pages)

d/D = Dynamic seal diameter = 90 mm*
S = Cross-section = 7.5 mm
P = Pressure = 315 bar
T = Temperature = 80 °C

* Insert the dynamic diameter and not the static one (groove diameter or tight fit). Means cylinder diameter for the piston seal (D) and rod diameter for the rod seal (d).

Method:

1. Draw a line connecting d/D to S and extend it until intersection with the line ξ_1 .
2. Draw a line connecting P to T and extend it until intersection with the line ξ_2 .
3. Connect the two intersections and read the allowable gap (0.16 mm) on scale “e”.

Example 2: NBR, HNBR and FKM seals between 70 and 85 Shore A

(see following pages)


d/D = Dynamic seal diameter = 100 mm*
S = Cross-section = 6 mm
P = Pressure = 100 bar
T = Temperature = 80 °C

* Insert the dynamic diameter and not the static one (groove diameter or tight fit). Means cylinder diameter for the piston seal (D) and rod diameter for the rod seal (d).

Method:


1. Draw a line connecting d/D to S and extend it until intersection with the line ξ_1 .
2. Draw a line connecting P to T and extend it until intersection with the line ξ_2 .
3. Connect the two intersections and read the allowable gap (0.18 mm) on scale “e”.










Polyurethane seals of Shore A ≥ 85 and cotton-reinforced seals

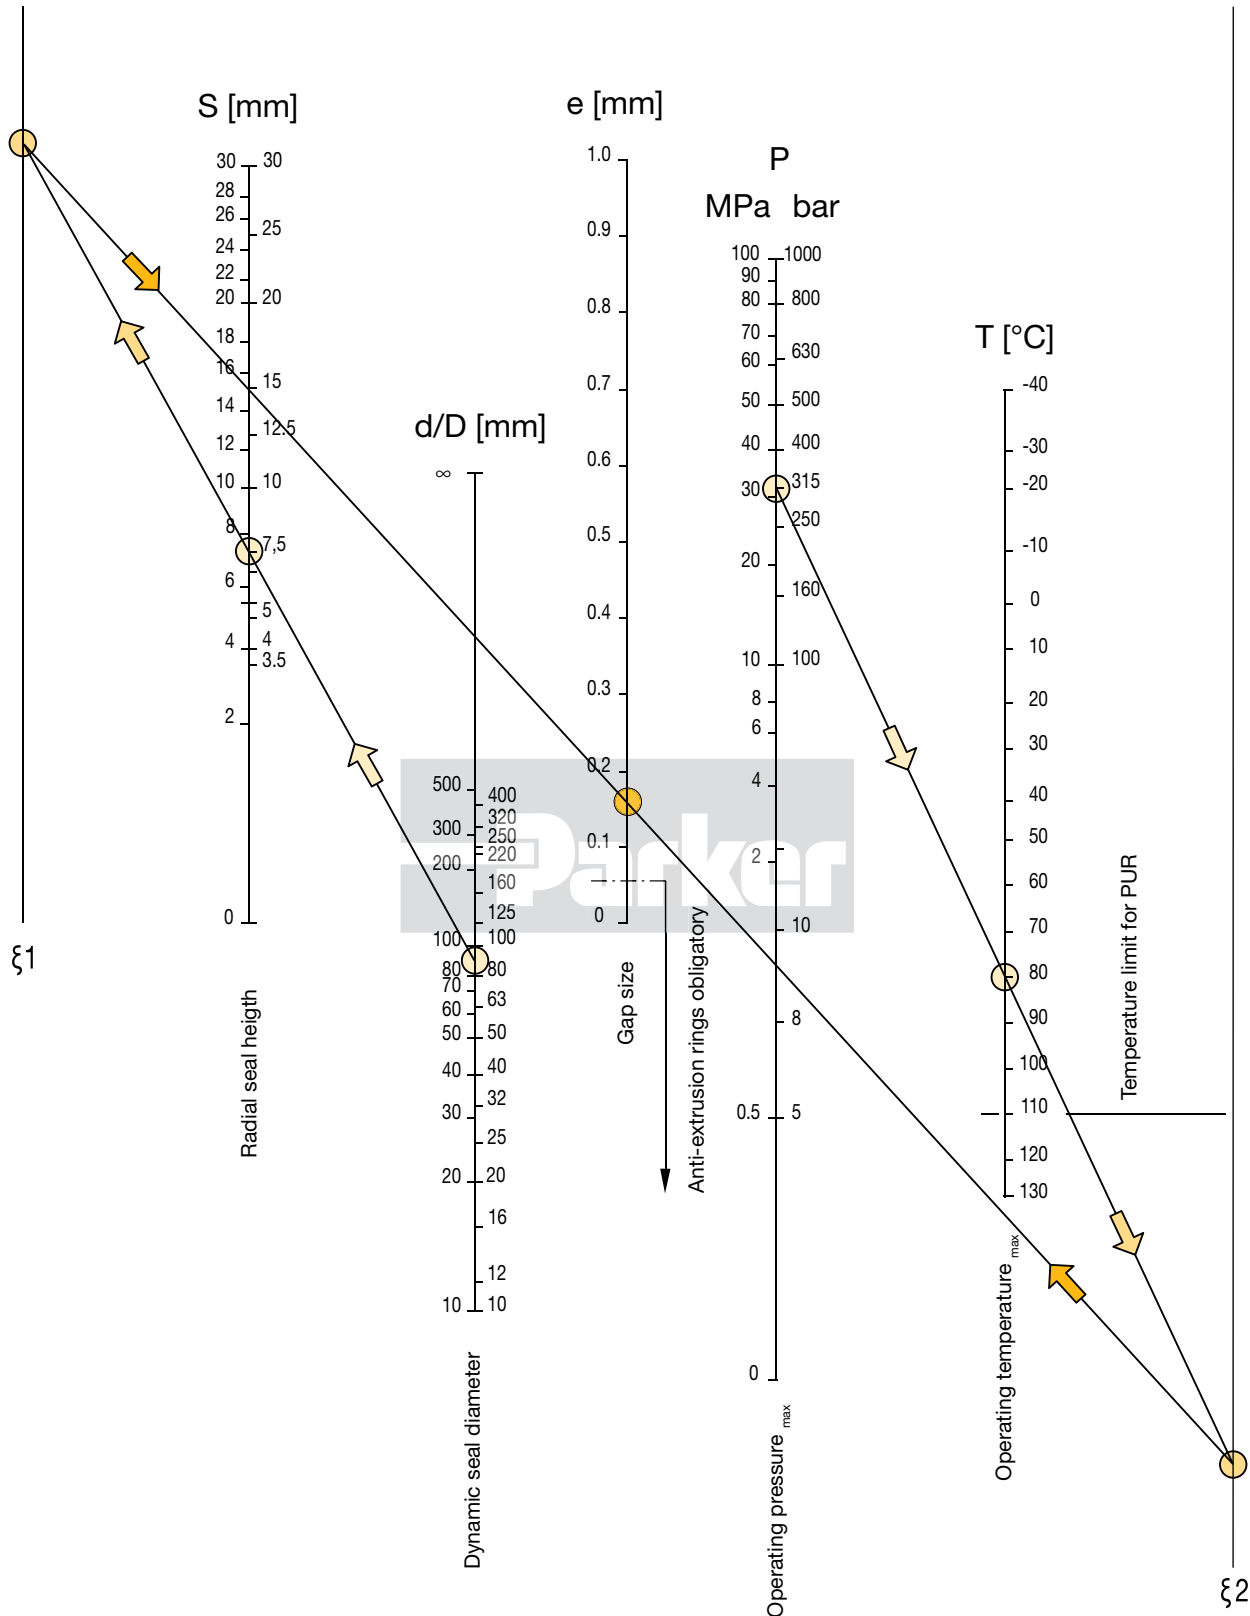

Maximum gap allowance

NBR, HNBR and FKM seals between 70 and 85 Shore

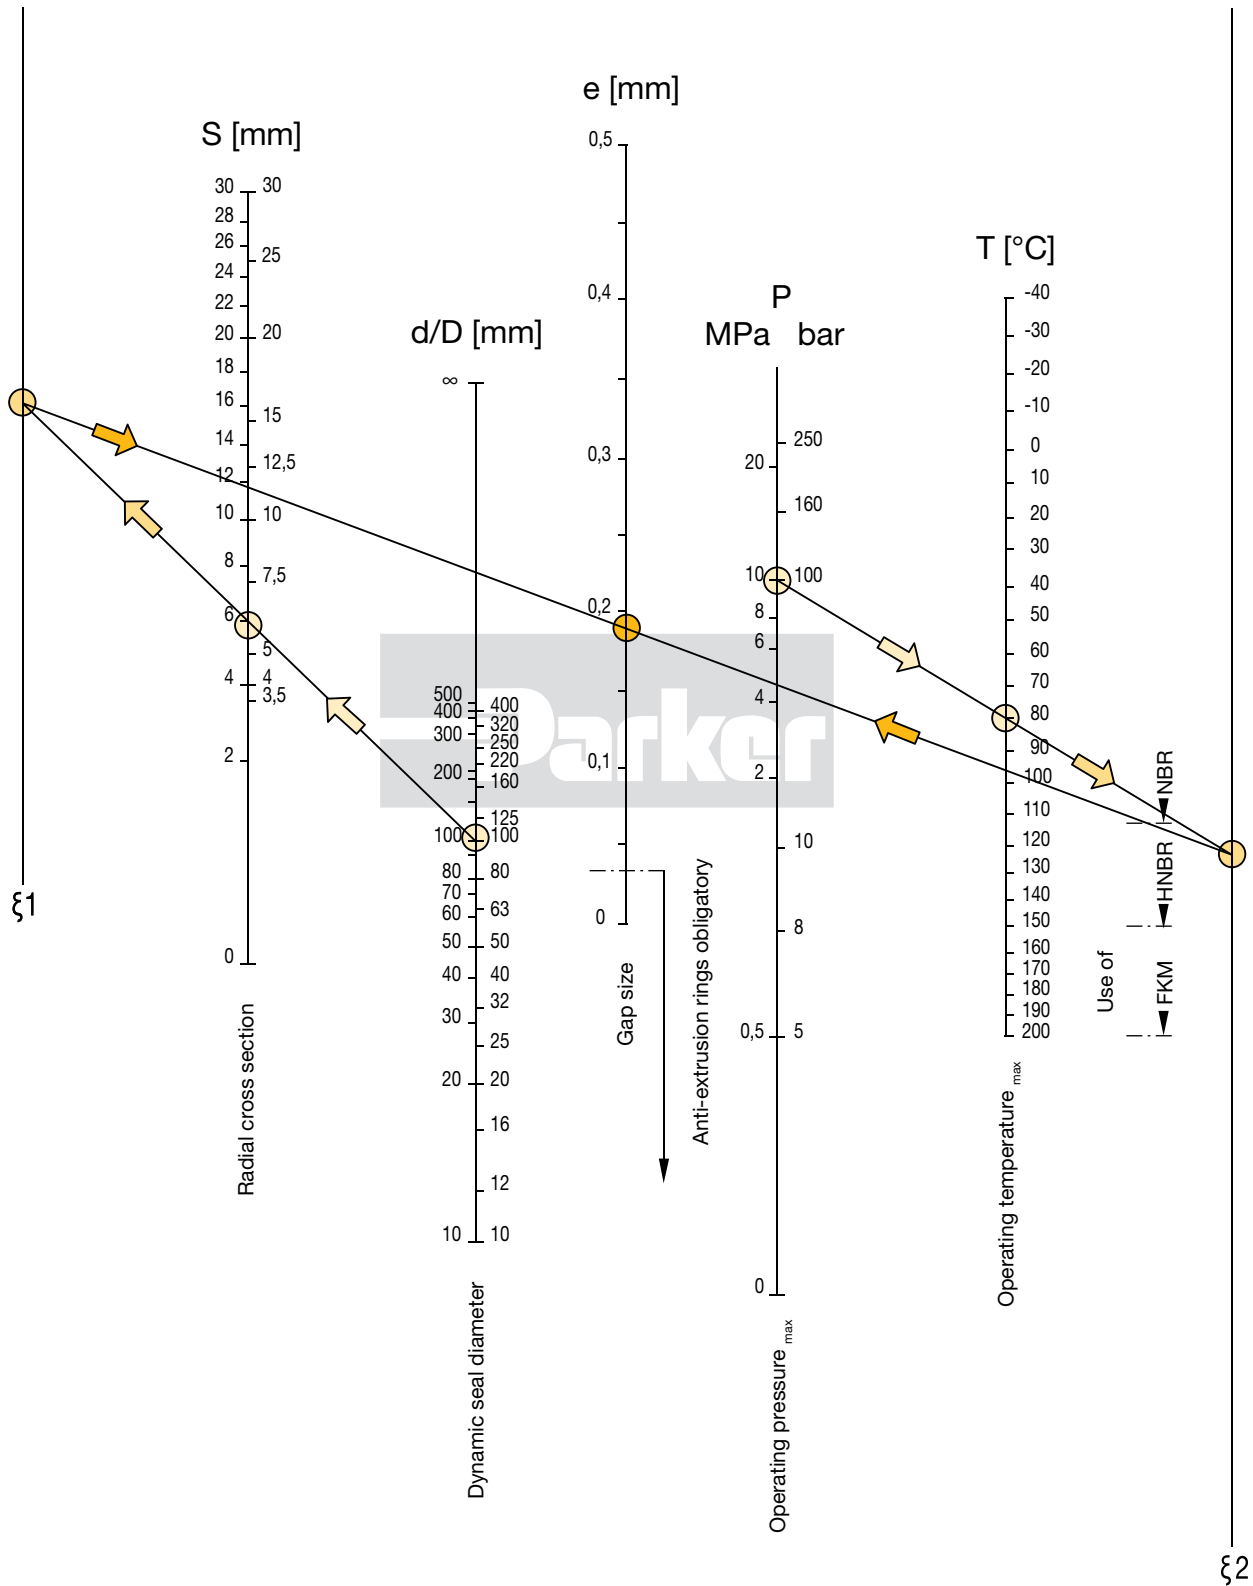

| Profile cross-section | Profile reference | Page |
|---|-------------------|------|
| Wipers | | |
|  | A1 (NBR) | 28 |
|  | A1 (TPU) | 31 |
|  | AF | 34 |
|  | AG | 36 |
|  | AH | 38 |
|  | AM | 40 |
| Double wipers | | |
|  | AD | 42 |
|  | AV | 48 |
|  | AY | 50 |

Wipers



The A1 wiper ring serves to prevent ingress of dust, dirt, sand and swarf. This is achieved by its special design which largely prevents scoring, protects the guiding parts and extends the service life of the seals. An oversized outer diameter ensures interference fit in the groove, thus preventing ingress of foreign particles and moisture via the static seal fit of the wiper.

The A1 wiper is available in both Ultrathan® and rubber compounds. The Ultrathan® versions are characterized by extremely high wear resistance.

- Good wear resistance.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to DIN ISO 6195, Type E.
- Product geometry prevents dirt deposits at the front face of the cylinder.
- Installation in closed and undercut housings.

Range of application

Axially operated rods in hydraulic and pneumatic working cylinders, plungers and rod guidances.

| | |
|-----------------------|-------------------|
| Operating temperature | -35 °C to +100 °C |
| Sliding speed | ≤ 2 m/s |

Compounds


The standard material is a NBR-based elastomer compound with a hardness of approx. 90 Shore A.

The profile A1 (NBR) wiper ring is resistant to greases, lubricants, hydraulic oils, HFA-, HFB-, HFC-media, petrol, petroleum, water and lyes.

Installation

The profile A1 wiper ring is supplied as a continuous ring. Any pressure on the back of the ring should be avoided. Intermediate sizes may easily be cut from the next largest ring with the same cross-section. The ring is to be cut at an angle of 90° to the new circumference length (+ 2 to 3 % in excess). Due to the excess length the two ends will fit closely together so that no gap will occur. Gluing is not necessary. The wiper can easily be pressed into the groove and will fit perfectly tight.


In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

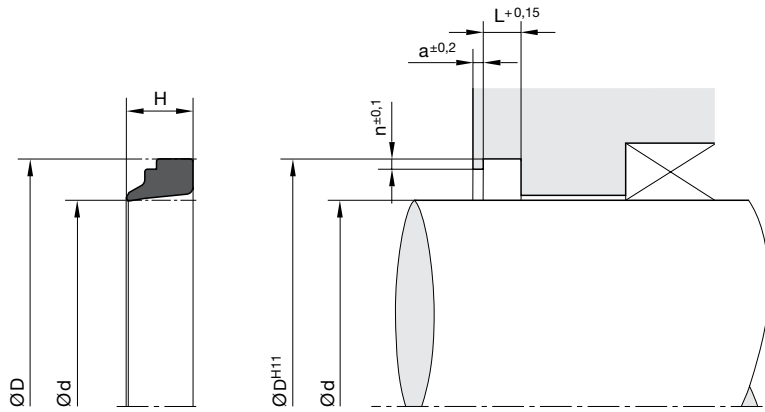

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | a | n | Order code | d | D | H | L | a | n | Order code |
|----|----|---|-----|---|-----|---------------|-----|-----|----|-----|-----|-----|---------------|
| 4 | 12 | 7 | 4 | 1 | 1 | A1 0015 N3587 | 42 | 50 | 7 | 4 | 1 | 1 | A1 4015 N3587 |
| 5 | 8 | 4 | 2.2 | 1 | 0.5 | A1 0025 N3587 | 44 | 52 | 7 | 4 | 1 | 1 | A1 4025 N3587 |
| 6 | 10 | 4 | 2.2 | 1 | 0.5 | A1 0035 N3587 | 45 | 53 | 7 | 4 | 1 | 1 | A1 4030 N3587 |
| 8 | 14 | 5 | 2.6 | 1 | 1 | A1 0042 N3587 | 46 | 54 | 7 | 4 | 1 | 1 | A1 4040 N3587 |
| 8 | 16 | 7 | 4 | 1 | 1 | A1 0045 N3587 | 47 | 55 | 7 | 4 | 1 | 1 | A1 4045 N3587 |
| 10 | 16 | 5 | 2.6 | 1 | 1 | A1 1002 N3587 | 48 | 56 | 7 | 4 | 1 | 1 | A1 4050 N3587 |
| 10 | 18 | 7 | 4 | 1 | 1 | A1 1005 N3587 | 50 | 58 | 7 | 4 | 1 | 1 | A1 5005 N3587 |
| 12 | 18 | 5 | 2.6 | 1 | 1 | A1 1009 N3587 | 52 | 60 | 7 | 4 | 1 | 1 | A1 5020 N3587 |
| 12 | 20 | 7 | 4 | 1 | 1 | A1 1010 N3587 | 54 | 62 | 7 | 4 | 1 | 1 | A1 5030 N3587 |
| 14 | 20 | 5 | 3.1 | 1 | 1 | A1 1014 N3587 | 55 | 63 | 7 | 4 | 1 | 1 | A1 5035 N3587 |
| 14 | 22 | 7 | 4 | 1 | 1 | A1 1015 N3587 | 56 | 64 | 7 | 4 | 1 | 1 | A1 5040 N3587 |
| 15 | 23 | 7 | 4 | 1 | 1 | A1 1020 N3587 | 57 | 65 | 7 | 4 | 1 | 1 | A1 5042 N3587 |
| 16 | 22 | 5 | 3.1 | 1 | 1 | A1 1016 N3587 | 58 | 66 | 7 | 4 | 1 | 1 | A1 5045 N3587 |
| 16 | 24 | 7 | 4 | 1 | 1 | A1 1025 N3587 | 60 | 68 | 7 | 4 | 1 | 1 | A1 6005 N3587 |
| 17 | 25 | 7 | 4 | 1 | 1 | A1 1030 N3587 | 60 | 72 | 10 | 5.5 | 1.5 | 1.5 | A1 6010 N3587 |
| 18 | 24 | 5 | 3.1 | 1 | 1 | A1 1034 N3587 | 63 | 71 | 7 | 4 | 1 | 1 | A1 6020 N3587 |
| 18 | 26 | 7 | 4 | 1 | 1 | A1 1035 N3587 | 65 | 73 | 7 | 4 | 1 | 1 | A1 6030 N3587 |
| 20 | 26 | 5 | 3.1 | 1 | 1 | A1 2026 N3587 | 66 | 74 | 7 | 4 | 1 | 1 | A1 6035 N3587 |
| 20 | 28 | 7 | 4 | 1 | 1 | A1 2005 N3587 | 68 | 76 | 7 | 4 | 1 | 1 | A1 6045 N3587 |
| 22 | 30 | 7 | 4 | 1 | 1 | A1 2010 N3587 | 70 | 78 | 7 | 4 | 1 | 1 | A1 7005 N3587 |
| 23 | 31 | 7 | 4 | 1 | 1 | A1 2015 N3587 | 72 | 80 | 7 | 4 | 1 | 1 | A1 7015 N3587 |
| 24 | 32 | 7 | 4 | 1 | 1 | A1 2020 N3587 | 73 | 81 | 7 | 4 | 1 | 1 | A1 7018 N3587 |
| 25 | 33 | 7 | 4 | 1 | 1 | A1 2025 N3587 | 75 | 83 | 7 | 4 | 1 | 1 | A1 7025 N3587 |
| 26 | 34 | 7 | 4 | 1 | 1 | A1 2030 N3587 | 78 | 86 | 7 | 4 | 1 | 1 | A1 7040 N3587 |
| 28 | 36 | 7 | 4 | 1 | 1 | A1 2035 N3587 | 80 | 88 | 7 | 4 | 1 | 1 | A1 8002 N3587 |
| 30 | 36 | 7 | 4 | 1 | 1 | A1 3003 N3587 | 82 | 90 | 7 | 4 | 1 | 1 | A1 8010 N3587 |
| 30 | 38 | 7 | 4 | 1 | 1 | A1 3005 N3587 | 85 | 93 | 7 | 4 | 1 | 1 | A1 8025 N3587 |
| 32 | 40 | 7 | 4 | 1 | 1 | A1 3010 N3587 | 86 | 94 | 7 | 4 | 1 | 1 | A1 8030 N3587 |
| 33 | 41 | 7 | 4 | 1 | 1 | A1 3015 N3587 | 90 | 98 | 7 | 4 | 1 | 1 | A1 9005 N3587 |
| 34 | 42 | 7 | 4 | 1 | 1 | A1 3020 N3587 | 92 | 100 | 7 | 4 | 1 | 1 | A1 9015 N3587 |
| 35 | 43 | 7 | 4 | 1 | 1 | A1 3025 N3587 | 95 | 103 | 7 | 4 | 1 | 1 | A1 9030 N3587 |
| 36 | 44 | 7 | 4 | 1 | 1 | A1 3030 N3587 | 97 | 105 | 7 | 4 | 1 | 1 | A1 9045 N3587 |
| 38 | 46 | 7 | 4 | 1 | 1 | A1 3035 N3587 | 100 | 108 | 7 | 4 | 1 | 1 | A1 A010 N3587 |
| 40 | 48 | 7 | 4 | 1 | 1 | A1 4005 N3587 | 105 | 117 | 10 | 5.5 | 1.5 | 1.5 | A1 A035 N3587 |

Further sizes on request.

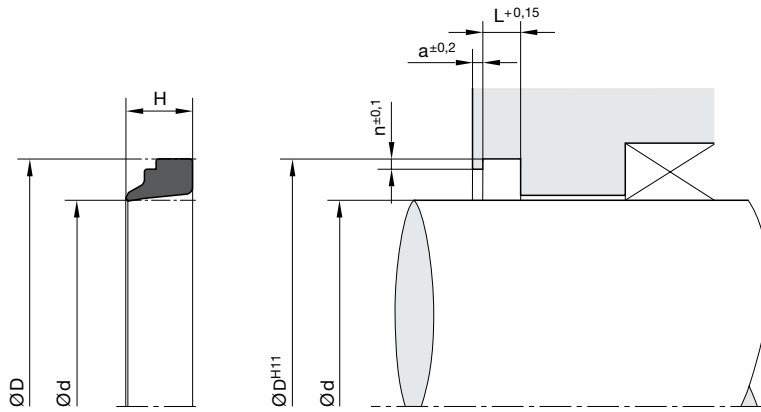

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | a | n | Order code | d | D | H | L | a | n | Order code |
|-----|-----|----|-----|-----|-----|---------------|-----|-----|----|-----|---|---|---------------|
| 106 | 118 | 10 | 5.5 | 1.5 | 1.5 | A1 A040 N3587 | 305 | 320 | 13 | 6.5 | 2 | 2 | A1 Q015 N3587 |
| 110 | 118 | 7 | 4 | 1 | 1 | A1 B005 N3587 | 310 | 325 | 13 | 6.5 | 2 | 2 | A1 Q020 N3587 |
| 110 | 122 | 10 | 5.5 | 1.5 | 1.5 | A1 B010 N3587 | 315 | 330 | 13 | 6.5 | 2 | 2 | A1 Q025 N3587 |
| 114 | 122 | 7 | 4 | 1 | 1 | A1 B028 N3587 | 320 | 335 | 13 | 6.5 | 2 | 2 | A1 Q030 N3587 |
| 115 | 127 | 10 | 5.5 | 1.5 | 1.5 | A1 B035 N3587 | 340 | 355 | 13 | 6.5 | 2 | 2 | A1 Q035 N3587 |
| 120 | 132 | 10 | 5.5 | 1.5 | 1.5 | A1 C010 N3587 | 365 | 380 | 13 | 6.5 | 2 | 2 | A1 Q050 N3587 |
| 125 | 137 | 10 | 5.5 | 1.5 | 1.5 | A1 C020 N3587 | 400 | 415 | 13 | 6.5 | 2 | 2 | A1 R020 N3587 |
| 130 | 142 | 10 | 5.5 | 1.5 | 1.5 | A1 D010 N3587 | 450 | 465 | 13 | 6.5 | 2 | 2 | A1 R015 N3587 |
| 135 | 147 | 10 | 5.5 | 1.5 | 1.5 | A1 D025 N3587 | 500 | 515 | 13 | 6.5 | 2 | 2 | A1 S015 N3587 |
| 140 | 152 | 10 | 5.5 | 1.5 | 1.5 | A1 E010 N3587 | | | | | | | |
| 145 | 157 | 10 | 5.5 | 1.5 | 1.5 | A1 E035 N3587 | | | | | | | |
| 150 | 162 | 10 | 5.5 | 1.5 | 1.5 | A1 F005 N3587 | | | | | | | |
| 152 | 164 | 10 | 5.5 | 1.5 | 1.5 | A1 F015 N3587 | | | | | | | |
| 155 | 167 | 10 | 5.5 | 1.5 | 1.5 | A1 F030 N3587 | | | | | | | |
| 160 | 172 | 10 | 5.5 | 1.5 | 1.5 | A1 G010 N3587 | | | | | | | |
| 165 | 177 | 10 | 5.5 | 1.5 | 1.5 | A1 G025 N3587 | | | | | | | |
| 166 | 178 | 10 | 5.5 | 1.5 | 1.5 | A1 G030 N3587 | | | | | | | |
| 170 | 182 | 10 | 5.5 | 1.5 | 1.5 | A1 H010 N3587 | | | | | | | |
| 175 | 187 | 10 | 5.5 | 1.5 | 1.5 | A1 H025 N3587 | | | | | | | |
| 180 | 192 | 10 | 5.5 | 1.5 | 1.5 | A1 J010 N3587 | | | | | | | |
| 185 | 197 | 10 | 5.5 | 1.5 | 1.5 | A1 J050 N3587 | | | | | | | |
| 190 | 202 | 10 | 5.5 | 1.5 | 1.5 | A1 K015 N3587 | | | | | | | |
| 195 | 207 | 10 | 5.5 | 1.5 | 1.5 | A1 K030 N3587 | | | | | | | |
| 200 | 212 | 10 | 5.5 | 1.5 | 1.5 | A1 L003 N3587 | | | | | | | |
| 210 | 218 | 7 | 4 | 1 | 1 | A1 L009 N3587 | | | | | | | |
| 210 | 225 | 13 | 6.5 | 2 | 2 | A1 L010 N3587 | | | | | | | |
| 220 | 235 | 13 | 6.5 | 2 | 2 | A1 M010 N3587 | | | | | | | |
| 230 | 245 | 13 | 6.5 | 2 | 2 | A1 M016 N3587 | | | | | | | |
| 235 | 250 | 13 | 6.5 | 2 | 2 | A1 M020 N3587 | | | | | | | |
| 240 | 255 | 13 | 6.5 | 2 | 2 | A1 N015 N3587 | | | | | | | |
| 250 | 265 | 13 | 6.5 | 2 | 2 | A1 N040 N3587 | | | | | | | |
| 260 | 275 | 13 | 6.5 | 2 | 2 | A1 O005 N3587 | | | | | | | |
| 265 | 280 | 13 | 6.5 | 2 | 2 | A1 O030 N3587 | | | | | | | |
| 300 | 315 | 13 | 6.5 | 2 | 2 | A1 Q010 N3587 | | | | | | | |

Further sizes on request.



The A1 wiper ring serves to prevent ingress of dust, dirt, sand and swarf. This is achieved by its special design which largely prevents scoring, protects the guiding parts and extends the service life of the seals. An oversized outer diameter ensures interference fit in the groove, thus preventing ingress of foreign particles and moisture via the static seal fit of the wiper.

The A1 wiper is available in both Ultrathan® and rubber compounds. The Ultrathan® versions are characterized by extremely high wear resistance.

- Extreme wear resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to DIN ISO 6195, Type E.
- Product geometry prevents dirt deposits at the front face of the cylinder.
- Installation in closed and undercut housings.
- Additional sizes of machined products available on short notice.

Range of application

Axially operated rods in hydraulic and pneumatic working cylinders, plungers and rod guidances.

| | |
|-----------------------|-------------------|
| Operating temperature | -35 °C to +110 °C |
| Sliding speed | ≤ 2 m/s |


Compounds

The Ultrathan® P5008 compound is a Parker material based on polyurethane with a hardness of approx. 93 Shore A. Its main advantages in comparison with other polyurethane materials currently available on the market are the increased heat and wear resistance.

Installation

The profile A1 Ultrathan® wiper ring can be snapped into simple housings. The wiper lip should not come into contact with piston rod eye or their connecting pieces. It is however recommended that the wiper lip be positioned outside the housing so that the wiped-off dirt can be easily removed.


In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

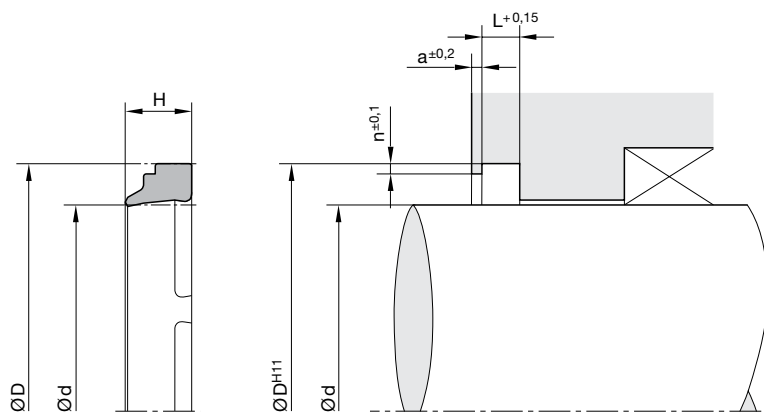

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | a | n | Order code |
|----|-----|----|-----|-----|-----|---------------|
| 12 | 20 | 7 | 4 | 1 | 1 | A1 1010 P5008 |
| 14 | 22 | 7 | 4 | 1 | 1 | A1 1015 P5008 |
| 16 | 24 | 7 | 4 | 1 | 1 | A1 1025 P5008 |
| 18 | 26 | 7 | 4 | 1 | 1 | A1 1035 P5008 |
| 20 | 28 | 7 | 4 | 1 | 1 | A1 2005 P5008 |
| 22 | 30 | 7 | 4 | 1 | 1 | A1 2010 P5008 |
| 25 | 33 | 7 | 4 | 1 | 1 | A1 2025 P5008 |
| 28 | 36 | 7 | 4 | 1 | 1 | A1 2035 P5008 |
| 30 | 38 | 7 | 4 | 1 | 1 | A1 3005 P5008 |
| 32 | 40 | 7 | 4 | 1 | 1 | A1 3010 P5008 |
| 35 | 43 | 7 | 4 | 1 | 1 | A1 3025 P5008 |
| 36 | 44 | 7 | 4 | 1 | 1 | A1 3030 P5008 |
| 38 | 46 | 7 | 4 | 1 | 1 | A1 3035 P5008 |
| 40 | 48 | 7 | 4 | 1 | 1 | A1 4005 P5008 |
| 42 | 50 | 7 | 4 | 1 | 1 | A1 4015 P5008 |
| 45 | 53 | 7 | 4 | 1 | 1 | A1 4030 P5008 |
| 48 | 56 | 7 | 4 | 1 | 1 | A1 4050 P5008 |
| 50 | 58 | 7 | 4 | 1 | 1 | A1 5005 P5008 |
| 50 | 62 | 10 | 5.5 | 1.5 | 1.5 | A1 5010 P5008 |
| 55 | 63 | 7 | 4 | 1 | 1 | A1 5035 P5008 |
| 56 | 64 | 7 | 4 | 1 | 1 | A1 5040 P5008 |
| 60 | 68 | 7 | 4 | 1 | 1 | A1 6005 P5008 |
| 62 | 70 | 7 | 4 | 1 | 1 | A1 6015 P5008 |
| 63 | 71 | 7 | 4 | 1 | 1 | A1 6020 P5008 |
| 65 | 73 | 7 | 4 | 1 | 1 | A1 6030 P5008 |
| 70 | 78 | 7 | 4 | 1 | 1 | A1 7005 P5008 |
| 70 | 82 | 10 | 5.5 | 1.5 | 1.5 | A1 7008 P5008 |
| 75 | 83 | 7 | 4 | 1 | 1 | A1 7025 P5008 |
| 80 | 88 | 7 | 4 | 1 | 1 | A1 8002 P5008 |
| 80 | 92 | 10 | 5.5 | 1.5 | 1.5 | A1 8003 P5008 |
| 85 | 93 | 7 | 4 | 1 | 1 | A1 8025 P5008 |
| 90 | 98 | 7 | 4 | 1 | 1 | A1 9005 P5008 |
| 95 | 103 | 7 | 4 | 1 | 1 | A1 9030 P5008 |
| 97 | 105 | 7 | 4 | 1 | 1 | A1 9045 P5008 |

Further sizes on request.

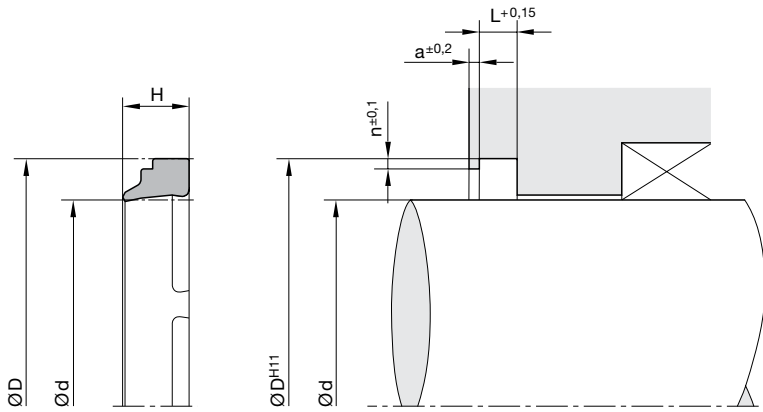

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | a | n | Order code |
|-----|-----|----|-----|-----|-----|---------------|
| 100 | 108 | 7 | 4 | 1 | 1 | A1 A010 P5008 |
| 105 | 117 | 10 | 5.5 | 1.5 | 1.5 | A1 A035 P5008 |
| 110 | 122 | 10 | 5.5 | 1.5 | 1.5 | A1 B010 P5008 |
| 120 | 132 | 10 | 5.5 | 1.5 | 1.5 | A1 C010 P5008 |
| 125 | 137 | 10 | 5.5 | 1.5 | 1.5 | A1 C020 P5008 |
| 128 | 140 | 10 | 5.5 | 1.5 | 1.5 | A1 C035 P5008 |
| 130 | 142 | 10 | 5.5 | 1.5 | 1.5 | A1 D010 P5008 |
| 140 | 152 | 10 | 5.5 | 1.5 | 1.5 | A1 E010 P5008 |
| 145 | 157 | 10 | 5.5 | 1.5 | 1.5 | A1 E035 P5008 |
| 150 | 162 | 10 | 5.5 | 1.5 | 1.5 | A1 F005 P5008 |
| 160 | 172 | 10 | 5.5 | 1.5 | 1.5 | A1 G010 P5008 |
| 170 | 182 | 10 | 5.5 | 1.5 | 1.5 | A1 H010 P5008 |
| 180 | 192 | 10 | 5.5 | 1.5 | 1.5 | A1 J010 P5008 |
| 190 | 202 | 10 | 5.5 | 1.5 | 1.5 | A1 K015 P5008 |
| 200 | 212 | 10 | 5.5 | 1.5 | 1.5 | A1 L003 P5008 |
| 220 | 235 | 13 | 6.5 | 2 | 2 | A1 M010 P5008 |
| 230 | 245 | 13 | 6.5 | 2 | 2 | A1 M016 P5008 |
| 240 | 255 | 13 | 6.5 | 2 | 2 | A1 N015 P5008 |
| 260 | 275 | 13 | 6.5 | 2 | 2 | A1 O005 P5008 |

Further sizes on request.



The wear-resistant Ultrathan® AF wiper ring serves to prevent ingress of dust, dirt, sand and swarf into the hydraulic cylinder. This reduces the risk of scoring on the piston rod caused by external contamination embedded in the guidance. The good wiping effect is achieved by the special design of the wiper lip.

The proven P5008 polyurethane compound stands for abrasion resistance, minor permanent deformation and robustness against external mechanical impact. The wiper is securely held in place in the axially open groove via press-fit of the metal jacket vis-à-vis the inner groove diameter. As the wiper lip is flush with the cylinder head it is largely protected against external mechanical damage.

- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Suitable for fully automatic installation.
- Dimensions according to DIN ISO 6195, Type B.
- Simple fabrication of the housing.

Range of application

Hydraulic cylinders and valve tappets

| | |
|-----------------------|-------------------|
| Operating temperature | -35 °C to +100 °C |
| Sliding speed | ≤ 2 m/s |


Compounds

Standard material of the elastomer part is Ultrathan® P5008, a polyurethane-based Parker compound with a hardness of approx. 93 Shore A. In comparison with other polyurethane materials currently available on the market, it excels because of its increased heat and wear resistance.

Installation

The profile AF Ultrathan® wiper rings are manufactured with a slightly oversized outer diameter D , thus ensuring a secure press fit in the groove D^{H8} after installation. Any contact of the wiper lip with piston rod eyes or other connecting parts should be avoided.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

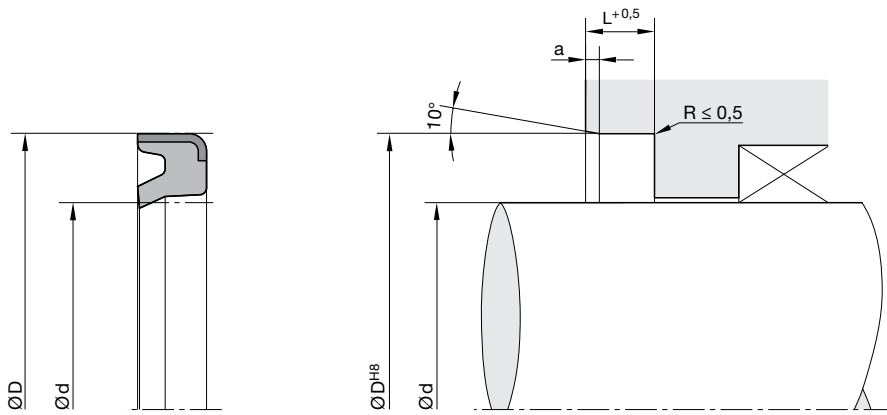

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | L | a | ISO ¹⁾ | Order code | d | D | L | a | ISO ¹⁾ | Order code |
|-------|--------|------|-----|-------------------|----------------|-------|-----|----|-----|-------------------|----------------|
| 20 | 30 | 7 | 1 | . | AF 2030 Z5071* | 90 | 100 | 7 | 1 | . | AF 9020 Z5071 |
| 25 | 35 | 7 | 1 | . | AF 2535 Z5071* | 90 | 104 | 8 | 1.5 | . | AF 9033 Z5071 |
| 30 | 40 | 6 | 1 | . | AF 3040 Z5071 | 90 | 105 | 6 | 1 | . | AF 9030 Z5071 |
| 36 | 48 | 6 | 1 | . | AF 3648 Z5071 | 90 | 110 | 10 | 2 | . | AF 9037 Z5071 |
| 40 | 50 | 7 | 1 | . | AF 4050 Z5071* | 95 | 109 | 8 | 1.5 | . | AF 9505 Z5071 |
| 40 | 52 | 6 | 1 | . | AF 4052 Z5071 | 100 | 115 | 7 | 1 | . | AF A016 Z5071 |
| 45 | 55 | 7 | 1 | . | AF 4555 Z5071* | 100 | 115 | 9 | 1.5 | . | AF A015 Z5071* |
| 45 | 60 | 7.5 | 1 | . | AF 4560 Z5071 | 100 | 120 | 10 | 2 | . | AF A021 Z5071 |
| 50 | 60 | 7 | 1 | . | AF 5060 Z5071* | 101.6 | 114 | 8 | 1.5 | . | AF A024 Z5071 |
| 50 | 65 | 7.5 | 1 | . | AF 5064 Z5071 | 110 | 125 | 9 | 1.5 | . | AF B025 Z5071 |
| 56 | 70 | 7.5 | 1 | . | AF 5656 Z5071 | 110 | 126 | 9 | 1.5 | . | AF B009 Z5071 |
| 57.15 | 69.96 | 7.92 | 1.5 | . | AF 5715 Z5071 | 110 | 130 | 10 | 2 | . | AF B011 Z5071 |
| 60 | 70 | 7 | 1 | . | AF 6005 Z5071 | 120 | 140 | 8 | 1.5 | . | AF C023 Z5071 |
| 60 | 74 | 8 | 1.5 | . | AF 6008 Z5107 | 120 | 140 | 10 | 2 | . | AF C024 Z5071 |
| 60 | 75 | - | 0.7 | . | AF 6028 Z5071 | 125 | 140 | 9 | 2 | . | AF C514 Z5071* |
| 63 | 73 | 7 | 1 | . | AF 6375 Z5071 | | | | | | |
| 63 | 78 | 7.5 | 1 | . | AF 6378 Z5071 | | | | | | |
| 65 | 79 | 8 | 1.5 | . | AF 6505 Z5071 | | | | | | |
| 65 | 80 | 5 | 0.7 | . | AF 6509 Z5071 | | | | | | |
| 69.85 | 95.4 | 12.7 | 2 | . | AF 6908 Z5071* | | | | | | |
| 70 | 80 | 7 | 1 | . | AF 7005 Z5071 | | | | | | |
| 70 | 84 | 8 | 1.5 | . | AF 7016 Z5071 | | | | | | |
| 70 | 85 | 7.5 | 1 | . | AF 7085 Z5071 | | | | | | |
| 71 | 86 | 5 | 0.7 | . | AF 7110 Z5071 | | | | | | |
| 75 | 89 | 8 | 1.5 | . | AF 7537 Z5071 | | | | | | |
| 75 | 90 | 5 | 0.7 | . | AF 7590 Z5071 | | | | | | |
| 76.5 | 96.5 | 10 | 2 | . | AF 7696 Z5071* | | | | | | |
| 80 | 90 | 7 | 1 | . | AF 8090 Z5071* | | | | | | |
| 80 | 94 | 8 | 1.5 | . | AF 8013 Z5071 | | | | | | |
| 80 | 95 | 5 | 0.7 | . | AF 8005 Z5071 | | | | | | |
| 80 | 100 | 10 | 2 | . | AF 8021 Z5071 | | | | | | |
| 82.55 | 108.08 | 12.7 | 2 | . | AF 8205 Z5071* | | | | | | |
| 85 | 99 | 8 | 1.5 | . | AF 8509 Z5071 | | | | | | |
| 85 | 105 | 10 | 2 | . | AF 8515 Z5071* | | | | | | |

1) DIN ISO 6195, Type B

* Moulds not available on the date of printing.

Further sizes on request.



The wear-resistant Ultrathan® AG wiper ring serves to prevent ingress of dust, dirt, sand and swarf at the rod eyes of a hydraulic cylinder. This reduces the risk of “seizure” on the swivel bolt due to external contamination. The good wiping effect is achieved by the special design of the wiper lip.

In addition, the wiper lip opens up during lubrication and allows excess grease to escape. The proven P5008 polyurethane compound stands for abrasion resistance, minor permanent deformation and robustness against external mechanical impact. The wiper is securely held in place in the axially open groove via press-fit of the metal jacket vis-à-vis the inner groove diameter. As the wiper lip is flush with the rod eye it is largely protected against external mechanical damage.

- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Suitable for fully automatic installation.
- Simple fabrication of the housing.

Range of application

Hydraulic cylinders and valve tappets

| | |
|-----------------------|-------------------|
| Operating temperature | -35 °C to +100 °C |
| Sliding speed | ≤ 2 m/s |


Compounds

Standard material of the elastomer part is Ultrathan® P5008, a polyurethane-based Parker compound with a Shore A hardness of approx. 93. In comparison with other polyurethane materials currently available on the market, it excels because of its increased heat and wear resistance.

Installation

The profile AG Ultrathan® wiper rings are manufactured with a slightly oversized outer diameter D , thus ensuring a secure press fit in the groove D^{H8} after installation. Any contact of the wiper lip with piston rod eyes or other connecting parts should be avoided.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

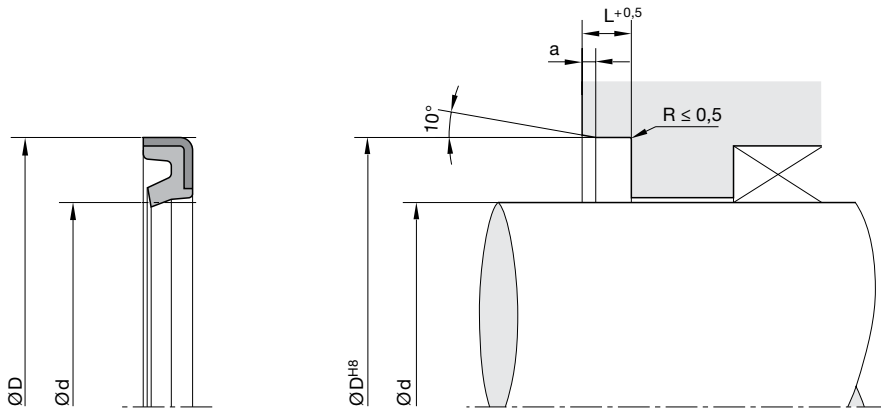

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | L | a | Order code |
|-----|-----|-----|-----|---------------|
| 25 | 35 | 4 | 1 | AG 2535 Z5071 |
| 30 | 40 | 4 | 1 | AG 3040 Z5071 |
| 35 | 45 | 4 | 1 | AG 3545 Z5071 |
| 38 | 48 | 4 | 1 | AG 3848 Z5071 |
| 40 | 50 | 4 | 1 | AG 4050 Z5071 |
| 45 | 55 | 4 | 1 | AG 4555 Z5071 |
| 50 | 60 | 5 | 1 | AG 5060 Z5071 |
| 50 | 65 | 5 | 1 | AG 050F Z5071 |
| 55 | 65 | 4.2 | 1 | AG 5565 Z5071 |
| 60 | 70 | 4.5 | 1 | AG 6071 Z5071 |
| 60 | 75 | 5 | 1 | AG 6028 Z5071 |
| 63 | 80 | 5 | 1 | AG 6380 Z5071 |
| 65 | 80 | 5 | 1 | AG 6509 Z5071 |
| 70 | 80 | 4.5 | 1 | AG 7081 Z5071 |
| 70 | 85 | 5 | 1 | AG 7005 Z5071 |
| 70 | 85 | 7.5 | 1 | AG 7085 Z5071 |
| 71 | 86 | 5 | 1 | AG 7110 Z5071 |
| 75 | 90 | 5 | 1 | AG 7590 Z5071 |
| 80 | 90 | 4.5 | 1 | AG 8091 Z5071 |
| 80 | 95 | 5 | 1 | AG 8005 Z5071 |
| 80 | 95 | 6.5 | 1 | AG 8006 Z5071 |
| 85 | 95 | 4.5 | 1 | AG 8596 Z5071 |
| 85 | 100 | 4 | 1 | AG 8500 Z5071 |
| 85 | 100 | 6 | 1 | AG 8506 Z5071 |
| 90 | 105 | 4 | 1 | AG 9005 Z5071 |
| 90 | 105 | 6 | 1 | AG 9030 Z5071 |
| 95 | 110 | 6.5 | 1 | AG 9510 Z5071 |
| 95 | 110 | 8 | 1.5 | AG 9511 Z5071 |
| 100 | 115 | 7 | 1 | AG A016 Z5071 |
| 100 | 120 | 6.5 | 1 | AG A020 Z5071 |
| 105 | 120 | 7 | 1 | AG A105 Z5071 |
| 110 | 125 | 6.5 | 1 | AG B023 Z5071 |
| 110 | 125 | 8 | 1.5 | AG B110 Z5071 |
| 110 | 130 | 4.5 | 1 | AG B131 Z5071 |

| d | D | L | a | Order code |
|-----|-----|-----|-----|---------------|
| 120 | 135 | 6.5 | 1 | AG C006 Z5071 |
| 120 | 135 | 8 | 1.5 | AG C120 Z5071 |

Further sizes on request.



The Ultrathan® AH double wiper serves to prevent ingress of dust, dirt, sand and swarf into hydraulic cylinders. This reduces the risk of scoring on the piston rod caused by external contaminants embedded in the guidance. The good wiping effect is achieved by the special design of the wiper lip. In addition, the sealing lip facing the medium reduces the residual oil film. The proven Ultrathan® P5008 compound stands for high abrasion resistance, minor permanent deformation, and robustness against external mechanical impact. The wiper is securely held in place in the axially open installation housing by means of a press fit of the metal case vis-à-vis the inner diameter of the groove.

- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Suitable for fully automatic installation.
- Product geometry prevents dirt deposits at the front face of the cylinder.
- Simple fabrication of the housing.

Range of application

Hydraulic cylinders

| | |
|-----------------------|-------------------|
| Operating temperature | -35 °C to +100 °C |
| Sliding speed | ≤ 2 m/s |

Compounds


Ultrathan® P5008 is a polyurethane-based Parker compound with a hardness of approx. 93 Shore A.

In comparison with other polyurethane materials currently available on the market it excels because of its increased heat and wear resistance.

Installation

The profile AH double wiper rings are manufactured with a slightly oversized outer diameter D , thus ensuring a secure press fit in the groove D^{H8} after installation. Any contact of the wiper lip with piston rod eyes or other connecting parts should be avoided.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

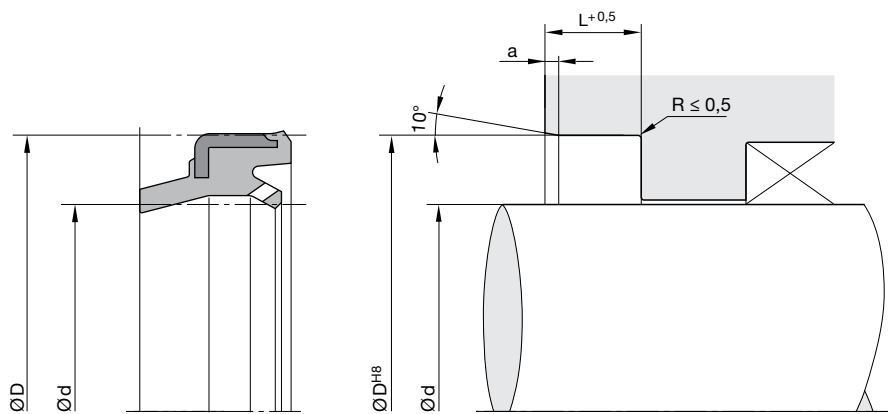

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | L | a | ISO ¹⁾ | Order code |
|-----|-----|-----|-----|-------------------|----------------|
| 20 | 30 | 7 | 1 | · | AH 2030 Z5071* |
| 22 | 32 | 7 | 1 | · | AH 2232 Z5071* |
| 25 | 35 | 7 | 1 | · | AH 2535 Z5071* |
| 28 | 38 | 7 | 1 | · | AH 2838 Z5071* |
| 32 | 42 | 7 | 1 | · | AH 3242 Z5071* |
| 36 | 46 | 7 | 1 | · | AH 3646 Z5071* |
| 40 | 50 | 7 | 1 | · | AH 4050 Z5071* |
| 45 | 55 | 7 | 1 | · | AH 4555 Z5071* |
| 50 | 60 | 7 | 1 | · | AH 5060 Z5071* |
| 56 | 66 | 7 | 1 | · | AH 5666 Z5071* |
| 60 | 70 | 7 | 1 | · | AH 6070 Z5071 |
| 63 | 73 | 7 | 1 | · | AH 6373 Z5071* |
| 70 | 80 | 7 | 1 | · | AH 7080 Z5071* |
| 70 | 80 | 7 | 1.5 | | AH 7008 Z5071* |
| 75 | 89 | 8 | 1.5 | | AH 7589 Z5071* |
| 80 | 90 | 7 | 1 | · | AH 8090 Z5071* |
| 80 | 90 | 8 | 1.5 | | AH 8007 Z5071 |
| 80 | 94 | 8 | 1.5 | | AH 8095 Z5071 |
| 85 | 99 | 8 | 1.5 | | AH 8599 Z5071 |
| 90 | 100 | 7 | 1 | · | AH 9010 Z5071* |
| 90 | 100 | 9.5 | 1.5 | | AH 9007 Z5071 |
| 90 | 104 | 8 | 1.5 | | AH 9004 Z5071 |
| 95 | 109 | 8 | 1.5 | | AH 9509 Z5071 |
| 100 | 110 | 7 | 1.5 | | AH A010 Z5071 |
| 100 | 114 | 8 | 1.5 | | AH A114 Z5071 |
| 100 | 115 | 9 | 1 | · | AH A115 Z5071* |
| 115 | 125 | 9 | 1 | · | AH A125 Z5071* |
| 125 | 140 | 9 | 1 | · | AH B140 Z5071* |

1) DIN ISO 6195, Type B

* Moulds not available on the date of printing.

Further sizes on request.



The AM wiper serves to prevent ingress of dust, dirt, sand and swarf. This is achieved by its special design which largely prevents scoring, protects the guiding parts and extends the service life of the seals. An oversized diameter ensures interference fit in the groove recess, thus preventing ingress of foreign particles at the wiper's outer diameter. The wiper ring of the AM product series can simply be press-fit into the cylinder liner and requires no special retention rings.

- Good wear resistance.
- Suitable for fully automatic installation.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.

Range of application

Hydraulic and pneumatic cylinders, valve lifters, etc.

| | |
|-----------------------|-------------------|
| Operating temperature | -35 °C to +100 °C |
| Pneumatics | -35 °C to +80 °C |
| Sliding speed | ≤ 2 m/s |


Compounds

Standard compound for the rubber part of the wiper is a NBR elastomer with a hardness of approx. 90 Shore A (Z5053). Additionally, a large number of dimensions is also available with FKM elastomer (Z5066).

Installation

The profile AM wiper rings are manufactured with a slightly oversized outer diameter D , thus ensuring a secure press fit in the groove D^{H8} after installation. Any contact of the wiper lip with piston rod eyes or other connecting parts should be avoided.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

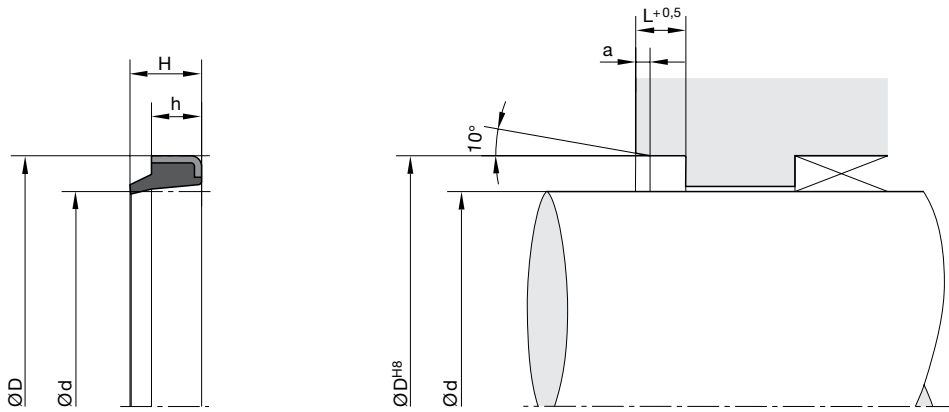

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | h/L | a | ISO ¹⁾ | Order code |
|----|----|-----|-----|-----|-------------------|---------------|
| 6 | 13 | 4.5 | 3 | 0.6 | | AM 0018 Z5053 |
| 10 | 16 | 4.5 | 3 | 0.6 | | AM 1016 Z5053 |
| 10 | 20 | 8 | 5 | 1 | | AM 1020 Z5053 |
| 12 | 20 | 6 | 4 | 0.8 | | AM 1029 Z5053 |
| 12 | 22 | 8 | 5 | 1 | | AM 1030 Z5053 |
| 14 | 22 | 4 | 3 | 0.6 | | AM 1035 Z5053 |
| 16 | 22 | 4 | 3 | 0.6 | | AM 1053 Z5053 |
| 16 | 26 | 8 | 5 | 1 | | AM 1055 Z5053 |
| 18 | 28 | 10 | 7 | 1.4 | | AM 1080 Z5053 |
| 20 | 28 | 5 | 3.5 | 0.8 | | AM 2001 Z5053 |
| 20 | 30 | 6 | 4 | 0.8 | | AM 2003 Z5053 |
| 20 | 30 | 10 | 7 | 1.4 | | AM 2005 Z5053 |
| 22 | 28 | 9 | 5 | 1 | | AM 2012 Z5053 |
| 22 | 32 | 10 | 7 | 1.4 | | AM 2015 Z5053 |
| 24 | 35 | 8 | 5 | 1 | | AM 2435 Z5053 |
| 25 | 35 | 10 | 7 | 1.4 | | AM 2048 Z5053 |
| 28 | 40 | 10 | 7 | 1.4 | | AM 2087 Z5053 |
| 30 | 40 | 8 | 5 | 1 | | AM 3010 Z5053 |
| 30 | 40 | 10 | 7 | 1.4 | | AM 3012 Z5053 |
| 32 | 45 | 8 | 4 | 0.8 | | AM 3020 Z5053 |
| 32 | 45 | 10 | 7 | 1.4 | | AM 3022 Z5053 |
| 35 | 45 | 10 | 7 | 1.4 | | AM 3050 Z5053 |
| 36 | 45 | 10 | 7 | 1.4 | | AM 3054 Z5053 |
| 36 | 46 | 8 | 5 | 1 | | AM 3055 Z5053 |
| 40 | 50 | 8 | 5 | 1 | | AM 4004 Z5053 |
| 40 | 50 | 10 | 7 | 1.4 | | AM 4005 Z5053 |
| 45 | 55 | 10 | 7 | 1.4 | | AM 4050 Z5053 |
| 45 | 60 | 10 | 7 | 1.4 | | AM 4052 Z5053 |
| 50 | 56 | 8 | 5 | 1 | | AM 5004 Z5053 |
| 50 | 60 | 8 | 5 | 1 | | AM 5007 Z5053 |
| 50 | 60 | 10 | 7 | 1.4 | | AM 5006 Z5053 |
| 50 | 65 | 8 | 5 | 1 | | AM 5010 Z5053 |
| 55 | 63 | 10 | 7 | 1.4 | | AM 5050 Z5053 |
| 55 | 65 | 10 | 7 | 1.4 | | AM 5048 Z5053 |

| d | D | H | h/L | a | ISO ¹⁾ | Order code |
|-----|-----|----|-----|-----|-------------------|---------------|
| 56 | 66 | 8 | 5 | 1 | | AM 5051 Z5053 |
| 56 | 66 | 10 | 7 | 1.4 | | AM 5052 Z5053 |
| 60 | 70 | 10 | 7 | 1.4 | | AM 6007 Z5053 |
| 60 | 74 | 8 | 5 | 0.8 | | AM 6008 Z5053 |
| 63 | 75 | 10 | 7 | 1.4 | | AM 6035 Z5053 |
| 63 | 83 | 8 | 5 | 1 | | AM 6043 Z5053 |
| 65 | 75 | 10 | 7 | 1.4 | | AM 6050 Z5053 |
| 70 | 80 | 10 | 7 | 1.4 | | AM 7008 Z5053 |
| 75 | 85 | 10 | 7 | 1.4 | | AM 7050 Z5053 |
| 80 | 90 | 10 | 7 | 1.4 | | AM 8009 Z5053 |
| 84 | 94 | 8 | 5 | 1 | | AM 8044 Z5053 |
| 85 | 95 | 10 | 7 | 1.4 | | AM 8050 Z5053 |
| 90 | 100 | 7 | 5 | 1 | | AM 9009 Z5053 |
| 90 | 100 | 10 | 7 | 1.4 | | AM 9010 Z5053 |
| 95 | 106 | 10 | 7 | 1.4 | | AM 9507 Z5053 |
| 100 | 110 | 7 | 5 | 1 | | AM A007 Z5053 |
| 100 | 110 | 10 | 7 | 1.4 | | AM A010 Z5053 |
| 110 | 120 | 10 | 7 | 1.4 | | AM B020 Z5053 |
| 115 | 125 | 10 | 7 | 1.4 | | AM B050 Z5053 |
| 120 | 130 | 10 | 7 | 1.4 | | AM C030 Z5053 |
| 125 | 140 | 12 | 9 | 1.8 | | AM C050 Z5053 |
| 130 | 145 | 12 | 9 | 1.8 | | AM D001 Z5053 |
| 140 | 155 | 12 | 9 | 1.8 | | AM E005 Z5053 |
| 150 | 166 | 12 | 8 | 1.8 | | AM F003 Z5053 |
| 160 | 176 | 12 | 8 | 1.8 | | AM G008 Z5053 |
| 165 | 180 | 12 | 8 | 1.8 | | AM G060 Z5053 |
| 170 | 185 | 14 | 10 | 2 | | AM H015 Z5053 |
| 180 | 195 | 14 | 10 | 2 | | AM J009 Z5053 |
| 200 | 220 | 16 | 12 | 2.4 | | AM L020 Z5053 |
| 240 | 260 | 16 | 12 | 2.4 | | AM N010 Z5092 |

1) DIN ISO 6195, Type B
Further sizes on request.



The AD double wiper featuring a Slipper Seal® design consists of a PTFE slide ring for the wiper function and an elastomer O-ring as a preloading element. It combines two functions: wiping against external contamination and a sealing function that reduces the residual oil film. The AD wiper is characterized by low break-away and sliding friction and can therefore be used in low-lube conditions as well.

Due to the material combination of the slide ring (PTFE) and the O-ring (elastomer), this product is suitable for a wide range of applications, especially for aggressive media and/or high temperatures. Several compounds can alternatively be selected according to the specific application profile.

Wiper rings serve to safeguard axially movable rods and pistons against ingress of dust, dirt, sand and swarf, thus protecting the guiding elements and seals and extending the service life of the sealing system.

- Excellent wear resistance.
- Minimal break-away and dynamic friction and no stick-slip tendency ensures uniform motion even at low speeds.
- Good energy efficiency due to low friction.
- High temperature resistance assured by suitable O-ring compound selection.
- Adaptable to nearly all media thanks to high chemical resistance of the sealing ring and large O-ring compound selection.
- Dimensions according to DIN ISO 6195, Type C or Type D.
- Available in diameters from 4 to 4500 mm.
- Installation in closed and undercut housings.

Range of application

The AD product series is suitable for a wide range of applications, especially for aggressive media and/or high temperatures.

| | |
|-----------------------|---------------------------------|
| Operating temperature | -30 °C to +100 °C ¹⁾ |
| with FKM O-ring | -30 °C to +200 °C |
| Sliding speed | ≤ 4 m/s |


¹⁾ With deviation from standard temperature range, please contact our consultancy service for adequate O-ring compound.

Compounds

Wiper ring: Polon® 052, modified PTFE with 40 % bronze.

O-ring: N0674, NBR elastomer with approx. 70 Shore A.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

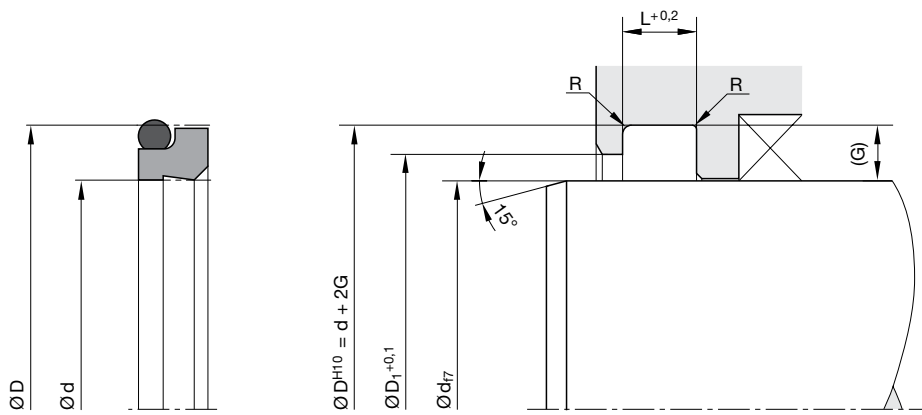

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example


Rod diameter 40 mm

AD 0400 052 00591 B (40 × 46.8 × 5)

| | | | | |
|-------|-----------------------------------|----------------|--------------------------|--------------|
| AD | Profile | | | |
| 0400 | Rod diameter × 10 | | | |
| 052 | Compound | | | |
| 00591 | Series no. / compound code O-ring | | | |
| | 00590 | without O-ring | | |
| | 00591 | N0674 (NBR) | 70 ^{±5} Shore A | -30 / +110°C |
| | 00592 | V0747 (FKM) | 75 ^{±5} Shore A | -25 / +200°C |
| | 00593 | N3575 (NBR) | 75 ^{±5} Shore A | -50 / +110°C |
| | 00594 | E0540 (EPDM) | 80 ^{±5} Shore A | -40 / +150°C |
| | 00595 | N3578 (NBR) | 75 ^{±5} Shore A | -30 / +110°C |
| | 00596 | N0552 (NBR) | 90 ^{±5} Shore A | -30 / +100°C |
| | 00597 | N1173 (HNBR) | 70 ^{±5} Shore A | -30 / +150°C |
| B | Cross-section | | | |

Please note:

For certain applications, it might be convenient to use a non-standard cross-section reduced or heavier. In these cases, please replace the standard cross-section code (in above example: „B“) by the one you require (for example „A“ or „C“).

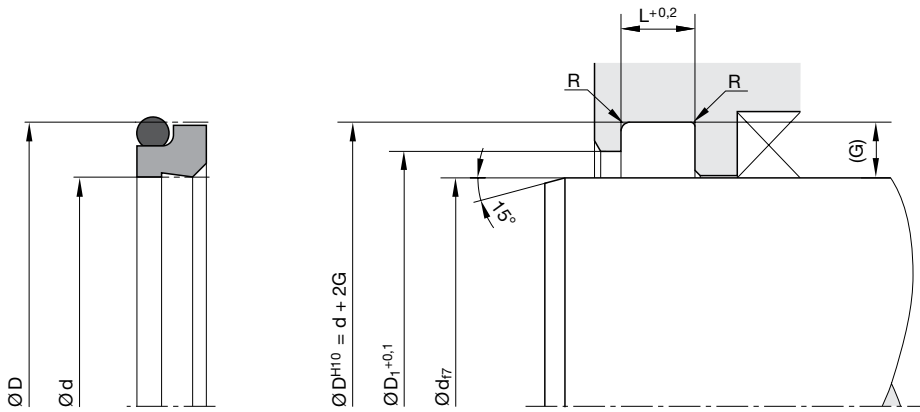


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Standard range

| Size | Groove | | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------|-------------|--------------------------|-----------|-------|------------|------------|-------------------|
| | Ø d (mm) | Ø D (mm) | Ø D ₁ (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 0040 | 4 | 8.80 | 5.50 | 3.70 | 2-009 | 1.78 | 5.28 | • |
| 0050 | 5 | 9.80 | 6.50 | 3.70 | 2-010 | 1.78 | 6.07 | • |
| 0070 | 7 | 11.80 | 8.50 | 3.70 | 2-011 | 1.78 | 7.65 | |
| 0080 | 8 | 12.80 | 9.50 | 3.70 | 2-012 | 1.78 | 9.25 | • |
| 0100 | 10 | 14.80 | 11.50 | 3.70 | 2-013 | 1.78 | 10.82 | • |
| 0120 | 12 | 18.80 | 13.50 | 5 | 2-113 | 2.62 | 13.94 | • |
| 0140 | 14 | 20.80 | 15.50 | 5 | 2-114 | 2.62 | 15.54 | • |
| 0150 | 15 | 21.80 | 16.50 | 5 | 2-115 | 2.62 | 17.12 | |
| 0160 | 16 | 22.80 | 17.50 | 5 | 2-116 | 2.62 | 18.72 | • |
| 0180 | 18 | 24.80 | 19.50 | 5 | 2-117 | 2.62 | 20.29 | • |
| 0200 | 20 | 26.80 | 21.50 | 5 | 2-118 | 2.62 | 21.89 | • |
| 0240 | 24 | 30.80 | 25.50 | 5 | 2-120 | 2.62 | 25.07 | |
| 0250 | 25 | 31.80 | 26.50 | 5 | 2-121 | 2.62 | 26.64 | • |
| 0260 | 26 | 32.80 | 27.50 | 5 | 2-122 | 2.62 | 28.24 | |
| 0280 | 28 | 34.80 | 29.50 | 5 | 2-123 | 2.62 | 29.82 | • |
| 0300 | 30 | 36.80 | 31.50 | 5 | 2-124 | 2.62 | 31.42 | |
| 0320 | 32 | 38.80 | 33.50 | 5 | 2-126 | 2.62 | 34.59 | • |
| 0350 | 35 | 41.80 | 36.50 | 5 | 2-127 | 2.62 | 36.17 | |
| 0370 | 37 | 43.80 | 38.50 | 5 | 2-129 | 2.62 | 39.34 | |
| 0380 | 38 | 44.80 | 39.50 | 5 | 2-130 | 2.62 | 40.94 | |
| 0400 | 40 | 46.80 | 41.50 | 5 | 2-131 | 2.62 | 42.52 | • |
| 0420 | 42 | 48.80 | 43.50 | 5 | 2-132 | 2.62 | 44.12 | |
| 0450 | 45 | 51.80 | 46.50 | 5 | 2-134 | 2.62 | 47.29 | • |
| 0480 | 48 | 54.80 | 49.50 | 5 | 2-136 | 2.62 | 50.47 | |
| 0500 | 50 | 56.80 | 51.50 | 5 | 2-137 | 2.62 | 52.07 | • |
| 0520 | 52 | 58.80 | 53.50 | 5 | 2-138 | 2.62 | 53.64 | |
| 0550 | 55 | 61.80 | 56.50 | 5 | 2-140 | 2.62 | 56.82 | |
| 0580 | 58 | 64.80 | 59.50 | 5 | 2-142 | 2.62 | 59.99 | |
| 0600 | 60 | 66.80 | 61.50 | 5 | 2-143 | 2.62 | 61.60 | |
| 0650 | 65 | 73.80 | 67 | 6 | 2-231 | 3.53 | 66.27 | |


¹⁾ Housing dimensions according to DIN ISO 6195, Type C or Type D.
Further sizes on request.

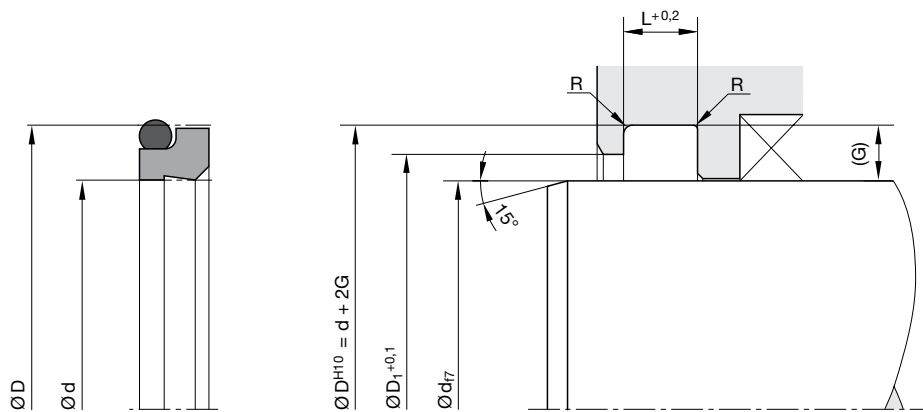

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| Size | Groove | | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------------------|-------------------------|---------------------------|-----------|-------|------------|------------|-------------------|
| | $\varnothing d$ (mm) | $\varnothing D$ (mm) | $\varnothing D_1$ (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 0700 | 70 | 78.80 | 72 | 6 | 2-233 | 3.53 | 72.62 | • |
| 0750 | 75 | 83.80 | 77 | 6 | 2-234 | 3.53 | 75.79 | |
| 0800 | 80 | 88.80 | 82 | 6 | 2-236 | 3.53 | 82.14 | • |
| 0850 | 85 | 93.80 | 87 | 6 | 2-237 | 3.53 | 85.32 | |
| 0900 | 90 | 98.80 | 92 | 6 | 2-239 | 3.53 | 91.67 | • |
| 0950 | 95 | 103.80 | 97 | 6 | 2-241 | 3.53 | 98.02 | |
| 1000 | 100 | 108.80 | 102 | 6 | 2-242 | 3.53 | 101.19 | • |
| 1100 | 110 | 118.80 | 112 | 6 | 2-245 | 3.53 | 110.72 | • |
| 1200 | 120 | 128.80 | 122 | 6 | 2-249 | 3.53 | 123.42 | |
| 1250 | 125 | 133.80 | 127 | 6 | 2-250 | 3.53 | 126.59 | • |
| 1300 | 130 | 138.80 | 132 | 6 | 2-252 | 3.53 | 132.94 | |
| 1400 | 140 | 148.80 | 142 | 6 | 2-255 | 3.53 | 142.47 | |
| 1500 | 150 | 158.80 | 152 | 6 | 2-258 | 3.53 | 151.99 | |
| 1550 | 155 | 163.80 | 157 | 6 | 2-259 | 3.53 | 158.34 | |
| 1600 | 160 | 168.80 | 162 | 6 | 2-260 | 3.53 | 164.69 | |
| 1700 | 170 | 178.80 | 172 | 6 | 2-261 | 3.53 | 171.04 | |
| 1750 | 175 | 183.80 | 177 | 6 | 2-262 | 3.53 | 177.39 | |
| 1800 | 180 | 188.80 | 182 | 6 | 2-263 | 3.53 | 183.74 | |
| 1850 | 185 | 193.80 | 187 | 6 | 2-263 | 3.53 | 183.74 | |
| 1900 | 190 | 198.80 | 192 | 6 | 2-264 | 3.53 | 190.09 | |
| 1950 | 195 | 203.80 | 197 | 6 | 2-265 | 3.53 | 196.44 | |
| 2000 | 200 | 208.80 | 202 | 6 | 2-266 | 3.53 | 202.79 | |
| 2100 | 210 | 218.80 | 212 | 6 | 2-267 | 3.53 | 209.14 | |
| 2200 | 220 | 228.80 | 222 | 6 | 2-269 | 3.53 | 221.84 | |
| 2250 | 225 | 233.80 | 227 | 6 | 2-270 | 3.53 | 228.19 | |
| 2300 | 230 | 238.80 | 232 | 6 | 2-271 | 3.53 | 234.54 | |
| 2400 | 240 | 248.80 | 242 | 6 | 2-272 | 3.53 | 240.89 | |
| 2500 | 250 | 258.80 | 252 | 6 | 2-274 | 3.53 | 253.59 | • |
| 2600 | 260 | 272.20 | 262 | 8.40 | 2-378 | 5.33 | 266.07 | |
| 2700 | 270 | 282.20 | 272 | 8.40 | 2-379 | 5.33 | 278.77 | |

¹⁾ Housing dimensions according to DIN ISO 6195, Type C or Type D.
Further sizes on request.

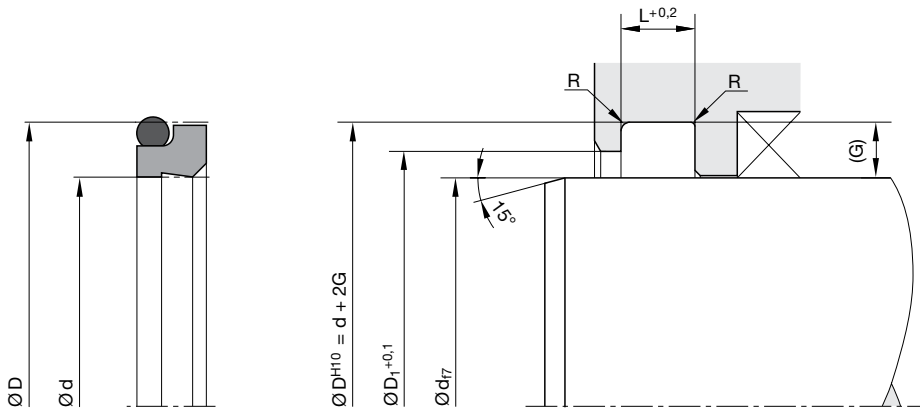

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| Size | Groove | | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------|-------------|--------------------------|-----------|-------|------------|------------|-------------------|
| | Ø d (mm) | Ø D (mm) | Ø D ₁ (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 2800 | 280 | 292.20 | 282 | 8.40 | 2-379 | 5.33 | 278.77 | • |
| 2900 | 290 | 302.20 | 292 | 8.40 | 2-380 | 5.33 | 291.47 | |
| 3000 | 300 | 312.20 | 302 | 8.40 | 2-381 | 5.33 | 304.17 | |
| 3100 | 310 | 322.20 | 312 | 8.40 | 2-381 | 5.33 | 304.17 | |
| 3200 | 320 | 332.20 | 322 | 8.40 | 2-382 | 5.33 | 329.57 | • |
| 3300 | 330 | 342.20 | 332 | 8.40 | 2-382 | 5.33 | 329.57 | |
| 3400 | 340 | 352.20 | 342 | 8.40 | 2-382 | 5.33 | 329.57 | |
| 3500 | 350 | 362.20 | 352 | 8.40 | 2-383 | 5.33 | 354.97 | |
| 3600 | 360 | 372.20 | 362 | 8.40 | 2-383 | 5.33 | 354.97 | • |
| 3700 | 370 | 382.20 | 372 | 8.40 | 2-383 | 5.33 | 354.97 | |
| 3800 | 380 | 392.20 | 382 | 8.40 | 2-384 | 5.33 | 380.37 | |
| 3900 | 390 | 402.20 | 392 | 8.40 | 2-384 | 5.33 | 380.37 | |
| 4000 | 400 | 412.20 | 402 | 8.40 | 2-385 | 5.33 | 405.26 | |
| 4100 | 410 | 422.20 | 412 | 8.40 | 2-385 | 5.33 | 405.26 | |
| 4200 | 420 | 432.20 | 422.50 | 8.40 | 2-386 | 5.33 | 430.66 | |
| 4300 | 430 | 446 | 432.50 | 11 | 2-463 | 6.99 | 430.66 | |
| 4400 | 440 | 456 | 442.50 | 11 | 2-464 | 6.99 | 443.38 | |
| 4500 | 450 | 466 | 452.50 | 11 | 2-465 | 6.99 | 456.03 | |
| 4600 | 460 | 476 | 462.50 | 11 | 2-466 | 6.99 | 468.76 | |
| 4700 | 470 | 486 | 472.50 | 11 | 2-466 | 6.99 | 468.76 | |
| 4800 | 480 | 496 | 482.50 | 11 | 2-467 | 6.99 | 481.46 | |
| 4900 | 490 | 506 | 492.50 | 11 | 2-468 | 6.99 | 494.16 | |
| 5000 | 500 | 516 | 502.50 | 11 | 2-469 | 6.99 | 506.86 | |

¹⁾ Housing dimensions according to DIN ISO 6195, Type C or Type D.
Further sizes on request.



The Ultrathan® AV double wiper serves to prevent ingress of dust, dirt, sand and swarf into hydraulic cylinders. The dirt shield formed on the wiper prevents moisture from migrating underneath the wiper into the groove, thus preventing corrosion which frequently occurs in the groove. The good wiping effect is achieved by the special design of the wiper lip. The proven Ultrathan® P5008 compound stands for high abrasion resistance, minor permanent deformation, and robustness against external mechanical impact. Due to the press fit in the groove and a pressure relief hole the risk of the wiper being extruded from the cylinder housing is minimized.

- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- The dirt shield prevents the intrusion of dirt and moisture in vertical cylinder applications.
- Installation in closed and undercut housings.
- Additional sizes of machined products available on short notice.

Range of application

The AV wiper is used in hydraulic cylinders and is particularly well-suited for mobile applications.

| | |
|-----------------------|-------------------|
| Operating temperature | -35 °C to +100 °C |
| Sliding speed | ≤ 2 m/s |

Compounds

The standard material is Ultrathan® P5008, a Parker compound based on polyurethane with a hardness of approx. 93 Shore A. Compared to off-the-shelf polyurethane grades it is characterized by higher thermal and hydrolysis resistance and a lower compression set.


Installation

The profile AV double lip wiper ring can easily be snapped into grooves of simple design. Any contact of the wiper lip with piston rod eyes or other connecting parts should be avoided.

However, we recommend the wiper lip to be out-side the housing, so that the wiped-off dirt falls off.

A ring-shaped area for improved abutting of the dirt shield should be provided at the front side of the cylinder.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

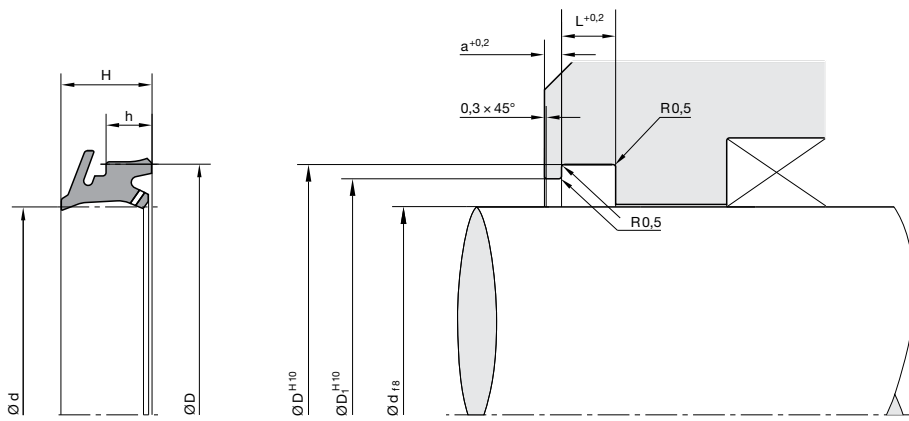

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | a | D ₁ | Order code |
|-----|-----|------|-----|-----|----------------|--------------|
| 28 | 36 | 7.75 | 4 | 1 | 34 | AV2836P5008* |
| 30 | 38 | 7.75 | 4 | 1 | 36 | AV3038P5008* |
| 36 | 44 | 7.75 | 4 | 1 | 42 | AV3644P5008* |
| 40 | 48 | 7.75 | 4 | 1 | 46 | AV4048P5008 |
| 45 | 53 | 7.75 | 4 | 1 | 51 | AV4553P5008 |
| 56 | 68 | 10 | 5.5 | 1.5 | 65 | AV5668P5008* |
| 63 | 75 | 10 | 5.5 | 1.5 | 72 | AV6375P5008* |
| 80 | 92 | 10 | 5.5 | 1.5 | 89 | AV8092P5008* |
| 100 | 115 | 16 | 9.5 | 3 | 110 | AVA115P5008* |
| 125 | 140 | 16 | 9.5 | 3 | 135 | AVC140P5008* |
| 140 | 155 | 16 | 9.5 | 3 | 150 | AVE155P5008* |
| 160 | 175 | 16 | 9.5 | 3 | 170 | AVG160P5212* |
| 180 | 195 | 16 | 9.5 | 3 | 190 | AVK195P5008* |
| 200 | 215 | 16 | 9.5 | 3 | 210 | AVL215P5008* |

* Moulds not available on the date of printing.



The wear-resistant Ultrathan® AY double wiper ring serves to prevent ingress of dust, dirt, sand and swarf. This is achieved by its special design which largely prevents scoring, protects the guiding parts and extends the service life of the seals. In addition, the sealing lip facing the media side reduces the residual oil film. The AY double wiper ring closes the cylinder vis-à-vis the environment.

The AY wiper can be installed in undercut grooves without requiring special screwings or brackets. In addition to higher wear resistance, the utilization of polyurethane offers good resistance against ozone and UV radiation. When PTFE rod seals are used we recommend the combination with the Ultrathan® AY wiper to minimize the residual oil film.

- Extreme wear resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to DIN ISO 6195, Type C.
- Installation in closed and undercut housings.
- Additional sizes of machined products available on short notice.

Range of application

For axially operated rods in hydraulic and pneumatic working cylinders, tappets and rod guidances.

| | |
|-----------------------|-------------------|
| Operating temperature | -35 °C to +100 °C |
| Pneumatics | -35 °C to +80 °C |
| Sliding speed | ≤ 2 m/s |

Compounds


Ultrathan® P5008 is a polyurethane-based Parker compound with a hardness of approx. 93 Shore A. In comparison with other polyurethane materials currently available on the market it excels because of its increased heat resistance, improved against hydrolysis, and lower compression set values.

Installation

The profile AY double lip wiper ring can easily be snapped into grooves of simple design. Any contact of the wiper lip with piston rod eyes or other connecting parts should be avoided.

However, we recommend the wiper lip to be out-side the housing, so that the wiped-off dirt falls off.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

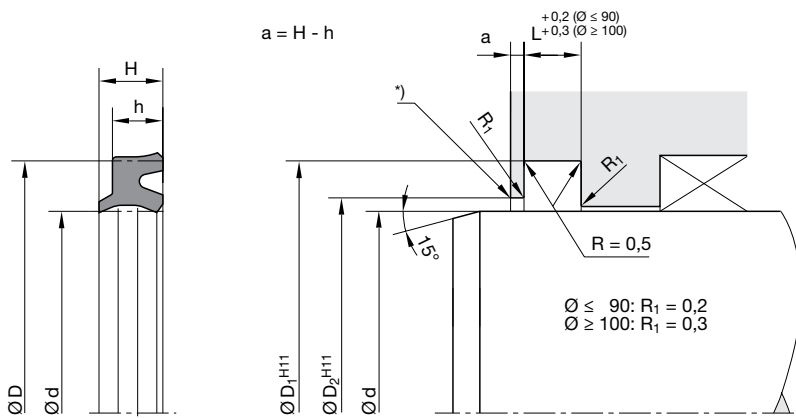





* Edges deburred

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | h | D ₂ | L | ISO ¹⁾ | Order code |
|-----|-----|-----|-----|----------------|-----|-------------------|---------------|
| 8 | 13 | 4.1 | 3.1 | 10.5 | 3.5 | | AY 0080 P5008 |
| 10 | 16 | 4.8 | 3.6 | 12.5 | 4 | · | AY 1003 P5008 |
| 12 | 18 | 4.8 | 3.6 | 14.5 | 4 | · | AY 1020 P5008 |
| 14 | 20 | 4.8 | 3.6 | 16.5 | 4 | · | AY 1040 P5008 |
| 15 | 21 | 4.8 | 3.6 | 17.5 | 4 | | AY 1521 P5008 |
| 16 | 22 | 4.8 | 3.6 | 18.5 | 4 | · | AY 1059 P5008 |
| 18 | 24 | 4.8 | 3.6 | 20.5 | 4 | · | AY 1080 P5008 |
| 20 | 26 | 4.8 | 3.6 | 22.5 | 4 | · | AY 2026 P5008 |
| 22 | 28 | 4.8 | 3.6 | 24.5 | 4 | · | AY 2020 P5008 |
| 25 | 31 | 4.8 | 3.6 | 27.5 | 4 | · | AY 2050 P5008 |
| 28 | 36 | 5.8 | 4.5 | 31 | 5 | · | AY 2080 P5008 |
| 30 | 38 | 5.8 | 4.5 | 33 | 5 | | AY 3001 P5008 |
| 32 | 40 | 5.8 | 4.5 | 35 | 5 | · | AY 3002 P5008 |
| 35 | 43 | 5.8 | 4.5 | 38 | 5 | | AY 3039 P5008 |
| 36 | 44 | 5.8 | 4.5 | 39 | 5 | · | AY 3060 P5008 |
| 37 | 45 | 5.8 | 4.5 | 40 | 5 | | AY 3070 P5008 |
| 40 | 48 | 5.8 | 4.5 | 43 | 5 | · | AY 4002 P5008 |
| 45 | 53 | 5.8 | 4.5 | 48 | 5 | · | AY 4045 P5008 |
| 50 | 58 | 5.8 | 4.5 | 53 | 5 | · | AY 5002 P5008 |
| 51 | 59 | 5.8 | 4.5 | 54 | 5 | | AY 5010 P5008 |
| 55 | 65 | 6.8 | 5.3 | 58 | 6 | | AY 5050 P5008 |
| 56 | 66 | 6.8 | 5.3 | 59 | 6 | · | AY 5060 P5008 |
| 60 | 70 | 6.8 | 5.3 | 63 | 6 | | AY 6003 P5008 |
| 63 | 73 | 6.8 | 5.3 | 66 | 6 | · | AY 6030 P5008 |
| 65 | 75 | 6.8 | 5.3 | 68 | 6 | | AY 6065 P5008 |
| 70 | 80 | 6.8 | 5.3 | 73 | 6 | · | AY 7000 P5008 |
| 75 | 85 | 6.8 | 5.3 | 78 | 6 | | AY 7085 P5008 |
| 80 | 90 | 6.8 | 5.3 | 83 | 6 | · | AY 8030 P5008 |
| 85 | 95 | 6.8 | 5.3 | 88 | 6 | | AY 8050 P5008 |
| 90 | 100 | 6.8 | 5.3 | 93 | 6 | · | AY 9000 P5008 |
| 100 | 110 | 6.8 | 5.3 | 103 | 6 | · | AY A005 P5008 |
| 110 | 125 | 9.5 | 7.5 | 114 | 8.5 | · | AY B000 P5008 |
| 120 | 135 | 9.5 | 7.5 | 124 | 8.5 | · | AY C020 P5205 |
| 125 | 140 | 9.5 | 7.5 | 129 | 8.5 | · | AY C030 P5008 |

| d | D | H | h | D ₂ | L | ISO ¹⁾ | Order code |
|-----|-----|-----|-----|----------------|-----|-------------------|---------------|
| 138 | 158 | 9.5 | 7.5 | 142 | 8.5 | | AY D838 P5008 |
| 140 | 155 | 9.5 | 7.5 | 144 | 8.5 | · | AY E001 P5008 |
| 160 | 175 | 9.5 | 7.5 | 164 | 8.5 | · | AY G001 P5008 |

1) DIN ISO 6195, Type C, for ISO 6020-2 cylinders.
Further sizes on request.

| Profile cross-section | Profile reference | Page |
|---|-------------------|------|
| Guiding elements | | |
|  | F3 | 55 |
|  | FC | 61 |
|  | FR | 63 |
|  | FK | 70 |

Guiding elements

Guide rings and tapes prevent metallic contact between pistons and cylinders or rods and glands where forces act perpendicular to the direction of movement.

These lateral forces (F) lead to a pressure distribution as shown in fig. 1. In practice, calculation based on the projected surface has proved to be a simple and more useful method. This means that the load carrying area (A) can be calculated from the length (H) multiplied by the diameter (D) (see fig. 2). The surface obtained is about 5 times larger than the assumed bearing area of fig. 1, so that lower specific loads must be reckoned with. In order to obtain the same values for lateral forces "F", the specific load must be only 1/5 of the max. force shown in fig. 1. The indicated permissible specific forces ($F_{perm.}$) take this into account, and the admissible specific pressure mentioned relates to the projected area as shown in fig. 2.

The values of the gaps (e) or shoulder diameters specified on drawings and Tables guarantee maximum efficiency of the guiding elements.

For operation together with a seal, however, the extrusion gap (e) specified for this particular seal is most important. Especially under high pressure the maximum gap behind the seal must be the basis for the determination of the piston-shoulder diameter between seal and guide tape (refer to chapter "Maximum gap allowance"). If the specified nominal measurements and tolerances are used to calculate the groove bottom diameter of the guide tapes, optimum guidance quality will be obtained and metallic contact prevented.

Figure:
H = Length of the guiding tape

Figure 1:


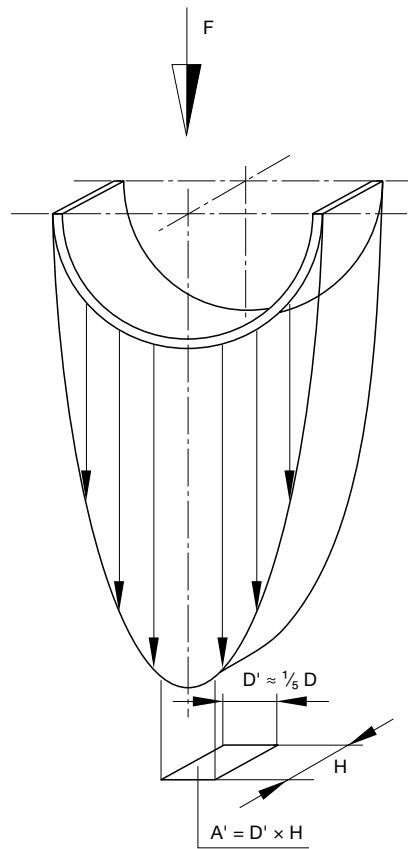


Figure 2:



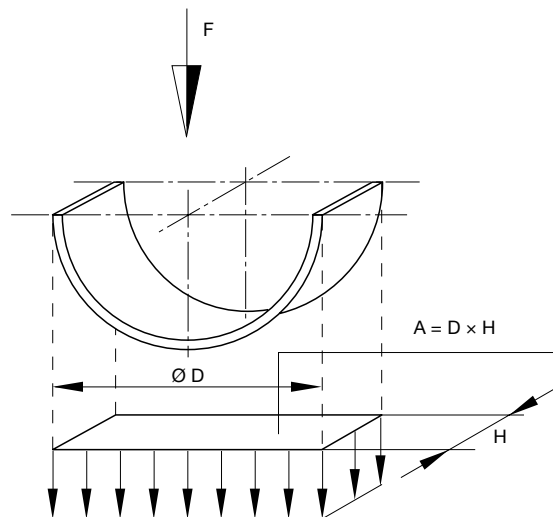

The F3 guiding tape made of PTFE compounds is specifically intended for use in hydraulic cylinders. The length of the cut-to-size guiding tape results in a suitable gap that allows the system pressure to pass toward the seal, taking thermal expansions into account. The resulting gap is preferably created at a 45 ° angle in order to enable a minimum guidance function under load in the direction of the gap. Alternative gap versions (straight cut, stepped cut) are possible. The PTFE compound should be selected depending on temperature and the permissible permanent deformation ϵ .

- Vibration absorption effect.
- Very good emergency running properties in low-lube conditions.
- High load capacity (compressive strength), low wear and reduced friction due to special bronze additive in PTFE material.
- Also available as bulk material.
- Any desired nominal diameter available due to use of machining technique.
- Suitable for cylinder repairs.
- Ideally suited for large-diameters.
- Installation in closed and undercut housings.

Range of application

| | |
|-----------------------|--------------------|
| Operating temperature | -100 °C to +200 °C |
| Sliding speed | ≤ 5 m/s |

Compounds

Standard: Polon® 052, PTFE + 40 % bronze.

On request: Polon® 062, PTFE + 60 % bronze.


For cylinders made of alloys, light metal and high-grade steel, we recommend the use of compound Polon® 033 (PTFE + 25 % carbon).

Installation


The gap dimensions “e” guarantee an optimum service life of the guidance tapes. For the seals, however, the gaps “e” as mentioned on the respective catalogue pages are to be considered when it is essential to observe full operating conditions („Range of Application“) for the seals.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Surfaces




Guiding tape F3:
smooth (standard)




Guiding tape FW:
structured (on request)


Cut types



Type A
(angle-cut)



Type S
(straight-cut)




Type Z
(step-cut)

Types A and S are used for bearings where it is imperative that the system pressure is carried on to the seals. They are designed as „open bearings“ with a well defined gap.

Type Z is a closed bearing, which in certain applications is used as a combined seal and bearing.

Calculation of the stretched length „U“

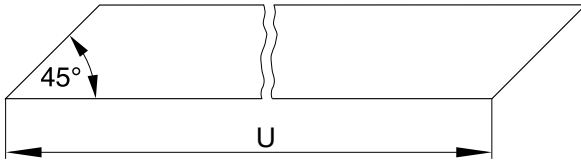

The length „U“ of the tape is to be calculated from the mean circumferential length less the clearance at the joint „k“. The k-values stated in the table are based on a temperature rise of 120 °C. (S = thickness of the guiding tape.)

Calculation of the stretched length „U“

| Cylinder Ø D Rod diameter d (mm) | Stretched length U | | Tolerance (mm) | Gap k (mm) |
|-------------------------------------|----------------------------------|----------------------------------|----------------|---------------|
| | Piston | Rod | | |
| ≤ 45 | | | ± 0.25 | 1.8 |
| > 45 | | | ± 0.4 | 3.5 |
| > 80 | | | ± 0.6 | 4.4 |
| > 100 | | | ± 0.8 | 5.6 |
| > 125 | $U = \pi \times (D - S) \cdot k$ | $U = \pi \times (d + S) \cdot k$ | ± 1 | 6.6 |
| > 150 | | | ± 1.2 | 8 |
| > 180 | | | ± 1.4 | 9.5 |
| > 215 | | | ± 1.6 | 12 |
| > 270 | | | ± 1.8 | 15.5 |
| > 330 | | | ± 2 | 19 |

Selection of the axial guiding width L

Choose the appropriate curve for the applicable guide tolerances. Note that the more precise the guidance, the lower the value for the selected ϵ .


The following formula provides the minimum guidance width:

$$L \geq \frac{F}{Q(d_i - k \cdot \sqrt{2})}$$


- d = inner diameter [mm]
- k = gap [mm]
- L = guidance width [mm]
- $Q_{perm.}$ = permissible specific load [N/mm^2]
- F = lateral force [N]


We recommend that the largest possible guidance length always be used even if the calculation yields a smaller value.

Permissible specific load $Q_{perm.}$ in relation to temperature t and the respective permanent set ϵ for the compounds Polon® 052:

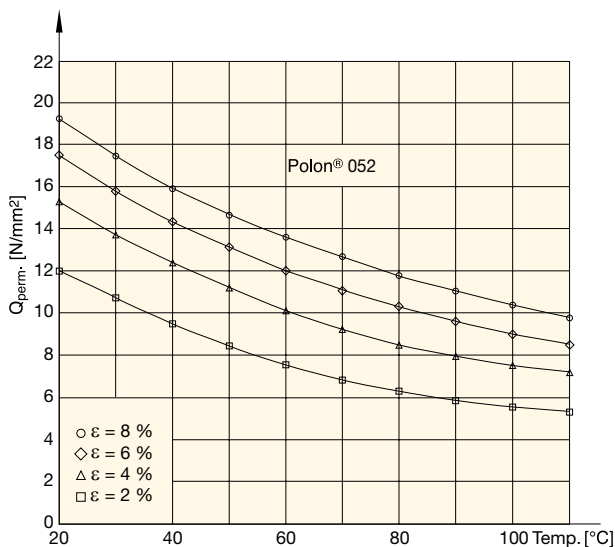

Permissible specific load $Q_{perm.}$ in relation to temperature t and the respective permanent set ϵ for the compounds Polon® 062:

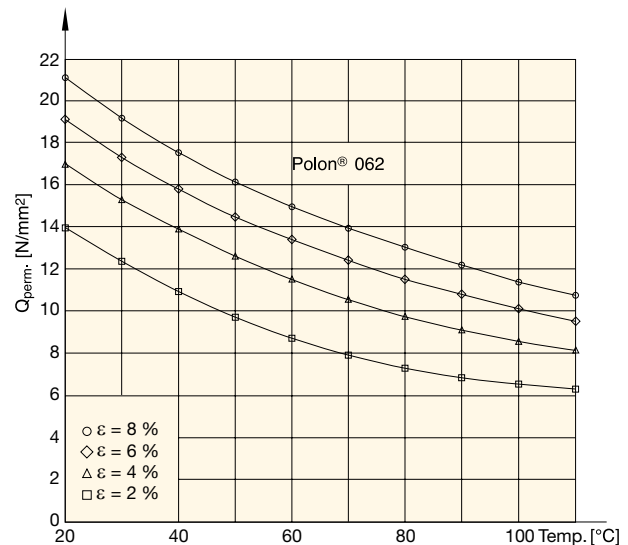


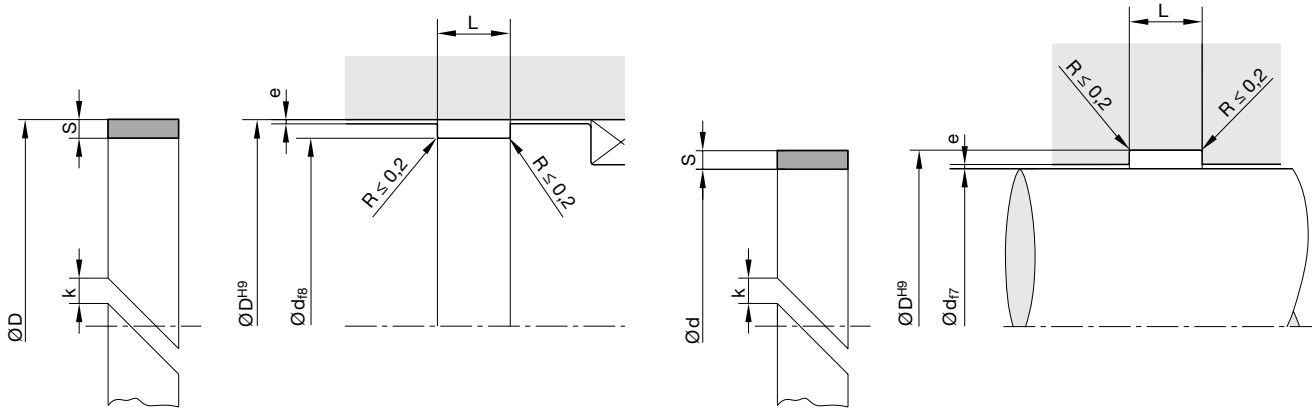

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Housing dimensions

| Series no. | Recommended rod Ø range | Guiding tape | | Groove | | |
|------------|-------------------------|--|----------------------|---------|---------|--------|
| | | d/D (mm) | S (mm) | L (mm) | d (mm) | D (mm) |
| 15063 | ≤ 50 | 1.50 ^{+0.02} _{-0.03} | 6.3 ^{+0.1} | D - 3.0 | d + 3.0 | 0.25 |
| 15081 | ≤ 50 | 1.50 ^{+0.02} _{-0.03} | 8.1 ^{+0.1} | D - 3.0 | d + 3.0 | 0.25 |
| 15100 | ≤ 50 | 1.50 ^{+0.02} _{-0.03} | 10.0 ^{+0.1} | D - 3.0 | d + 3.0 | 0.25 |
| 15150 | ≤ 50 | 1.50 ^{+0.02} _{-0.03} | 15.0 ^{+0.1} | D - 3.0 | d + 3.0 | 0.25 |
| 16025 | ≤ 50 | 1.55 ^{+0.02} _{-0.03} | 2.5 ^{+0.1} | D - 3.1 | d + 3.1 | 0.25 |
| 16040 | ≤ 51 | 1.55 ^{+0.02} _{-0.03} | 4.0 ^{+0.1} | D - 3.1 | d + 3.1 | 0.25 |
| 20063 | ≤ 50 | 2.00 _{-0.05} | 6.3 ^{+0.1} | D - 4.0 | d + 4.0 | 0.30 |
| 20081 | ≤ 51 | 2.00 _{-0.05} | 8.1 ^{+0.1} | D - 4.0 | d + 4.0 | 0.30 |
| 20097 | > 50 | 2.00 _{-0.05} | 9.7 ^{+0.1} | D - 4.0 | d + 4.0 | 0.30 |
| 20150 | > 50 | 2.00 _{-0.05} | 15.0 ^{+0.1} | D - 4.0 | d + 4.0 | 0.30 |
| 20200 | > 50 | 2.00 _{-0.05} | 20.0 ^{+0.1} | D - 4.0 | d + 4.0 | 0.30 |
| 25042 | > 50 | 2.50 _{-0.05} | 4.2 ^{+0.1} | D - 5.0 | d + 5.0 | 0.40 |
| 25056 | > 50 | 2.50 _{-0.05} | 5.6 ^{+0.1} | D - 5.0 | d + 5.0 | 0.40 |
| 25063 | > 50 | 2.50 _{-0.05} | 6.3 ^{+0.1} | D - 5.0 | d + 5.0 | 0.40 |
| 25081 | > 50 | 2.50 _{-0.05} | 8.1 ^{+0.1} | D - 5.0 | d + 5.0 | 0.40 |
| 25097 | > 50 | 2.50 _{-0.05} | 9.7 ^{+0.1} | D - 5.0 | d + 5.0 | 0.40 |
| 25150 | > 50 | 2.50 _{-0.05} | 15.0 ^{+0.2} | D - 5.0 | d + 5.0 | 0.40 |
| 25200 | > 50 | 2.50 _{-0.05} | 20.0 ^{+0.2} | D - 5.0 | d + 5.0 | 0.40 |
| 25250 | > 50 | 2.50 _{-0.05} | 25.0 ^{+0.2} | D - 5.0 | d + 5.0 | 0.40 |
| 25300 | > 50 | 2.50 _{-0.05} | 30.0 ^{+0.2} | D - 5.0 | d + 5.0 | 0.40 |

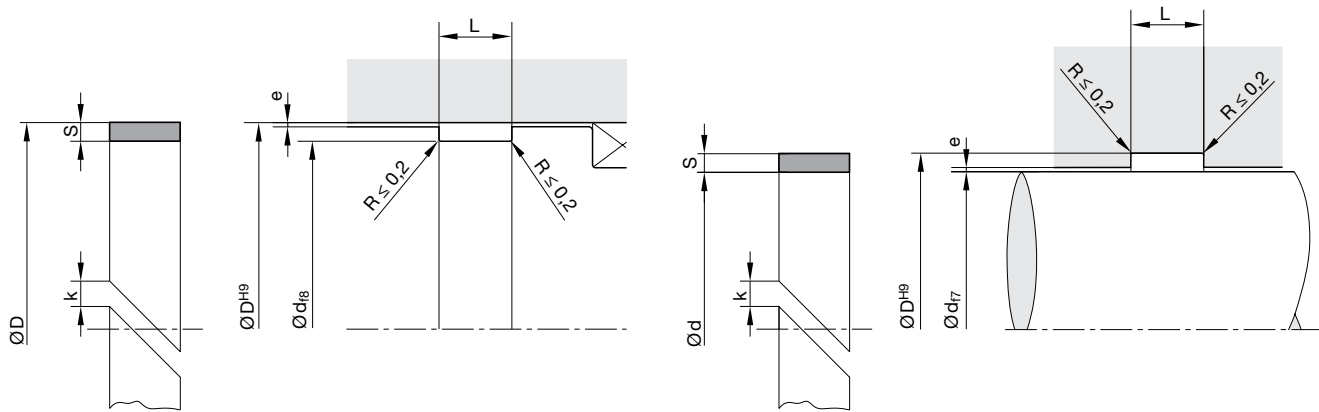

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example piston guidance

| | |
|-----------------|--------------|
| Mating surface | steel |
| Surface | smooth |
| Piston diameter | 80 mm |
| Groove | 9.7 × 2.5 mm |

| | |
|------------------|---|
| a) by the metre | F3 0000 052 25097 A (9.7 × 2.5) |
| b) cut to length | F3 0800 052 25097 A (9.7 × 2.5 × 239) |
| F3 | Profile |
| 0800 | Piston diameter × 10 (by the metre: 0000) |
| 052 | Compound |
| 25097 | Series no. |
| A | Type of cut |

Ordering example rod guidance

| | |
|---|--------------|
| Surface | structured |
| Rod diameter | 50 mm |
| Groove outer diameter | OD = ID + 2S |
| Groove | 6.3 × 2.5 mm |
| FW 0550 052 25063 A (6.3 × 2.5 × 161.5) | |



The FC guiding tape made of fabric phenolic resin laminate is intended for use in hydraulic cylinders. It is suitable as a piston and rod guide and can be cut to any desired length (max. 5.5 m).

When cutting the guiding tape to length (using a formula) it is created in a slit form (45 ° cut) to enable installation. In addition, the slit version ensures that the system pressure can pass toward the seal, taking thermal expansions into account.

The FC guiding tape is exceptionally pressure-resistant and wear-resistant. Pressure resistance is much higher than that of guiding elements made of other plastics.

The tape is wound in the form of flat coils on a core diameter of approx. 120 mm. Only complete rolls of tape stock are sold (5.5 m). Designed length to be cut by the customer.

- Minimal play due to extremely small manufacturing tolerances of the guiding elements.
- Vibration absorption effect.
- Extreme wear resistance.
- Improved sliding properties due to surface structure.
- Can be elongated or compressed within limited diameter ranges (preferably ≥ 100 mm).
- Significantly higher permissible loading pressure compared with other guidance tape materials.
- Any desired nominal diameter available due to use of machining technique.
- Suitable for cylinder repairs.
- Ideally suited for large-diameters.
- Bulk material.
- Installation in closed and undercut housings.

Range of application

Guiding element for pistons and rods in hydraulic cylinders.

Operating temperature

| | |
|----------------------------|-------------------|
| FC Q5030T | -40 °C to +120 °C |
| FC Q5038T | -50 °C to +130 °C |
| in HFA, HFB and HFC fluids | -30 °C to +80 °C |

Pressure resistance acc. to EN ISO 604

| | |
|-----------|-----------------------|
| FC Q5030T | 270 N/mm ² |
| FC Q5038T | 320 N/mm ² |

Sliding speed ≤ 0.5 m/s

Compounds

Duroplastic synthetic resins with fabric reinforcement.
 Q5030T: phenole resin-polyester fabric laminate, colour: grey.
 Q5038T: phenole resin-acrylic fabric laminate, colour: brown.

Installation

For piston and rod diameters up to 100 mm, we recommend our FR/FK guide rings.

For surface requirements, see chapter „General Installation Guidelines“.

The installed rings must have a gap „k“ between their diagonally cut ends:

$$k = 0.008 \times d + 2$$

The calculated values for „k“ are rounded up to the nearest millimetre.

The calculation of the permissible radial force is based on the projected area $D \times H$ (cylinder) or $d \times H$ (rod).

Example: permissible radial force F_R for a cylinder diameter of $D = 80$ mm, length $L = 15$ mm, compound Q5038T and safety factor 4:

$$F_R = \frac{D \times L \times q}{v} = \frac{80 \times 15 \times 320}{4} = 96\,000 \text{ N}$$

Recommendation for determining the safety factor v : $v > 3$

Calculation of elongated length

$$"U" \text{ (piston)} = \pi \times (D - S) - k$$

Calculation of elongated length

$$"U" \text{ (rod)} = \pi \times (d + S) - k$$

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.



The FR rod guide ring made of fabric phenolic resin laminate is intended for use in hydraulic cylinders. The guide ring is created in a slit form (45 ° cut) to enable installation. In addition, the slit version ensures that the system pressure can pass toward the seal, taking thermal expansions into account.

The FR guide ring is exceptionally pressure-resistant and wear-resistant. Pressure resistance is much higher than that of guiding elements made of other plastics.

After installation, the FR guide ring has an interference fit against the bottom of the groove.

- Minimal play due to extremely small manufacturing tolerances of the guiding elements.
- Vibration absorption effect.
- Extreme wear resistance.
- Improved sliding properties due to surface structure.
- Significantly higher permissible loading pressure compared with other guidance tape materials.
- Dimensions according to DIN 10766.
- Any desired nominal diameter available due to use of machining technique.
- Installation in closed and undercut housings.

Range of application

Guiding element for rods in hydraulic cylinders.

Operating temperature

| | |
|----------------------------|-------------------|
| FR Q5029 | -50 °C to +120 °C |
| FR Q5038 | -50 °C to +130 °C |
| in HFA, HFB and HFC fluids | -30 °C to +80 °C |
| in water max. | + 100 °C |

Pressure resistance acc. to DIN 53454

| | |
|----------|-----------------------|
| FR Q5029 | 270 N/mm ² |
| FR Q5038 | 340 N/mm ² |

Water absorption acc. to DIN 53495

| | |
|----------|------------|
| FR Q5029 | 1 % to 2 % |
| FR Q5038 | < 0.1 % |

Sliding speed ≤ 0.5 m/s

Compounds

Duroplastic synthetic resins with fabric reinforcement.

Q5029: phenole resin-cotton laminate.

Q5038: phenole resin-acrylic fabric laminate.

Installation

For surface requirements, see chapter „General Installation Guidelines“.

For nonferrous and light metal pistons, please use our F3 guidance tape profile (PTFE with carbon filler).

The installed rings must have a gap „k“ between their diagonally cut ends:

$$k = 0.008 \times d + 2$$

The calculated values for „k“ are rounded up to the nearest millimetre or half-millimetre.

The calculation of the permissible radial force is based on the projected area $d \times L$.

Example: permissible radial force F_R for a rod diameter of $d = 80$ mm, length $L = 15$ mm, compound Q5038T and safety factor 4:


$$F_R = \frac{d \times L \times q}{v} = \frac{80 \times 15 \times 270}{4} = 81\,000 \text{ N}$$

Recommendation for determining the safety factor v : $v > 3$

Calculation of elongated length

$$\text{"U" (rod)} = \pi \times (d + S) \cdot k$$

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

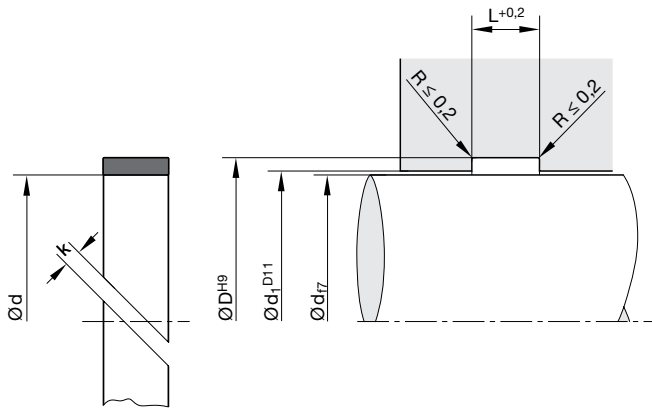


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example

Guide ring profile FR for a rod diameter of 63 mm.


| | |
|----------------|-------------------------------|
| Order code | FR 6370 Q5029 (63 × 68 × 9,7) |
| FR | Profile reference |
| 6370 | Dimension code |
| Q5029 or Q5038 | Standard compound |
| d × D × L | Nominal dimensions |

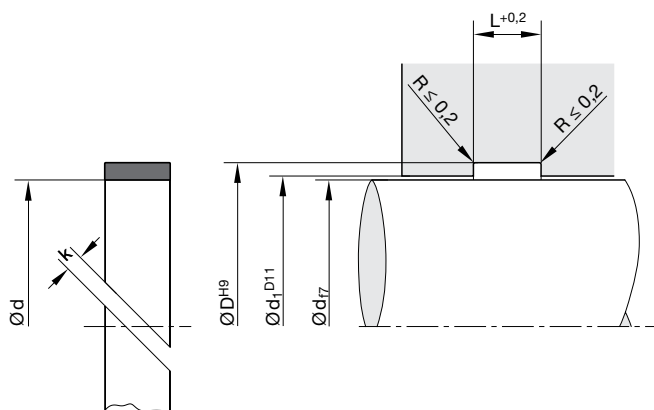

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | L | d ₁ | Order code | d | D | L | d ₁ | Order code |
|------|------|-----|----------------|---------------|------|------|-----|----------------|---------------|
| 11 | 14 | 2.6 | 11.2 | FR 1114 Q5038 | 36 | 41 | 9.7 | 36.3 | FR 3620 Q5038 |
| 12 | 15 | 3.6 | 12.2 | FR 1215 Q5038 | 37 | 42 | 5.6 | 37.3 | FR 3742 Q5038 |
| 12 | 15.1 | 4 | 12.2 | FR 1216 Q5038 | 38 | 41 | 2.5 | 38.3 | FR 3841 Q5038 |
| 14 | 17 | 2.5 | 14.2 | FR 1417 Q5038 | 40 | 45 | 5.6 | 40.4 | FR 4004 Q5038 |
| 15 | 18 | 2.5 | 15.2 | FR 1518 Q5038 | 40 | 45 | 9.7 | 40.4 | FR 4006 Q5038 |
| 15.5 | 19 | 3.6 | 15.7 | FR 1519 Q5038 | 40 | 45 | 15 | 40.4 | FR 4010 Q5038 |
| 18 | 21 | 2.5 | 18.2 | FR 1823 Q5038 | 40 | 45.1 | 5.6 | 40.4 | FR 4047 Q5038 |
| 18 | 21 | 6 | 18.2 | FR 1821 Q5038 | 40 | 46 | 9.8 | 40.4 | FR 4046 Q5038 |
| 20 | 25 | 4 | 20.2 | FR 2025 Q5038 | 44 | 50 | 5.1 | 44.4 | FR 4451 Q5038 |
| 20 | 25 | 5.6 | 20.2 | FR 2005 Q5038 | 45 | 48 | 2.5 | 45.4 | FR 4548 Q5038 |
| 20 | 25 | 9.7 | 20.2 | FR 2007 Q5038 | 45 | 50 | 5.6 | 45.4 | FR 4504 Q5038 |
| 20 | 26 | 5.1 | 20.2 | FR 2008 Q5038 | 45 | 50 | 6.3 | 45.4 | FR 4506 Q5038 |
| 22 | 25 | 2.5 | 22.2 | FR 2225 Q5038 | 45 | 50 | 9.7 | 45.4 | FR 4505 Q5038 |
| 22 | 25.1 | 4 | 22.2 | FR 2224 Q5038 | 45 | 50 | 15 | 45.4 | FR 4508 Q5038 |
| 22 | 26 | 5.6 | 22.2 | FR 2226 Q5038 | 48 | 53 | 9.7 | 48.4 | FR 4853 Q5029 |
| 25 | 30 | 5.6 | 25.2 | FR 2506 Q5038 | 50 | 55 | 5.6 | 50.4 | FR 5015 Q5038 |
| 25 | 30 | 9.7 | 25.2 | FR 2507 Q5038 | 50 | 55 | 9.7 | 50.4 | FR 5018 Q5038 |
| 25.4 | 28.5 | 4 | 25.6 | FR 2528 Q5029 | 50 | 55 | 20 | 50.4 | FR 5019 Q5038 |
| 27 | 32 | 5.6 | 27.2 | FR 2702 Q5038 | 50.8 | 55.8 | 16 | 51.2 | FR 5079 Q5038 |
| 28 | 33 | 5.6 | 28.2 | FR 2823 Q5038 | 50.8 | 55.8 | 25 | 51.2 | FR 5080 Q5038 |
| 28 | 33 | 9.7 | 28.2 | FR 2833 Q5038 | 53 | 58 | 9.7 | 53.4 | FR 5309 Q5038 |
| 30 | 33 | 2.5 | 30.2 | FR 3033 Q5038 | 55 | 58 | 4 | 55.4 | FR 5558 Q5038 |
| 30 | 35 | 4 | 30.2 | FR 3002 Q5038 | 55 | 60 | 9.7 | 55.4 | FR 5507 Q5038 |
| 30 | 35 | 5.6 | 30.2 | FR 3001 Q5038 | 55 | 60 | 15 | 55.4 | FR 5510 Q5038 |
| 30 | 35 | 9.7 | 30.2 | FR 3003 Q5038 | 57 | 60 | 4 | 57.4 | FR 5760 Q5038 |
| 30 | 36 | 5.1 | 30.2 | FR 3036 Q5038 | 58 | 63 | 5.6 | 58.4 | FR 5808 Q5038 |
| 32 | 37 | 5.6 | 32.3 | FR 3205 Q5038 | 58 | 63 | 6.3 | 58.4 | FR 5680 Q5038 |
| 32 | 37 | 9.7 | 32.3 | FR 3209 Q5038 | 58 | 63 | 9.7 | 58.4 | FR 5805 Q5038 |
| 34 | 40 | 5.1 | 34.3 | FR 3440 Q5038 | 60 | 65 | 9.7 | 60.5 | FR 6005 Q5038 |
| 35 | 40 | 4 | 35.3 | FR 3505 Q5029 | 60 | 65 | 15 | 60.5 | FR 6010 Q5038 |
| 35 | 40 | 5.6 | 35.3 | FR 3506 Q5038 | 63 | 68 | 5.6 | 63.5 | FR 6305 Q5029 |
| 35 | 40 | 9.7 | 35.3 | FR 3507 Q5038 | 63 | 68 | 9.7 | 63.5 | FR 6370 Q5038 |
| 35 | 45 | 15 | 35.3 | FR 3528 Q5038 | 63 | 68 | 15 | 63.5 | FR 6315 Q5038 |
| 36 | 41 | 5.6 | 36.3 | FR 3618 Q5038 | 65 | 70 | 5.6 | 65.5 | FR 6501 Q5029 |


Further sizes on request.

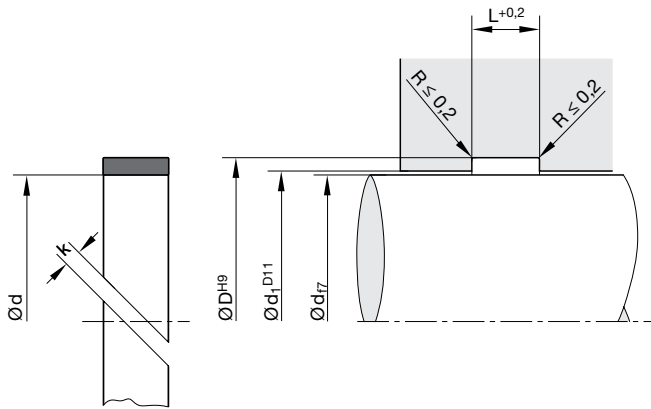

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | L | d ₁ | Order code | d | D | L | d ₁ | Order code |
|-----|-----|-----|----------------|---------------|-----|-----|-----|----------------|---------------|
| 65 | 70 | 9.7 | 65.5 | FR 6503 Q5038 | 105 | 110 | 15 | 105.6 | FR A511 Q5038 |
| 65 | 70 | 15 | 65.5 | FR 6506 Q5038 | 105 | 110 | 20 | 105.6 | FR A520 Q5038 |
| 70 | 75 | 6.3 | 70.5 | FR 7000 Q5038 | 105 | 110 | 25 | 105.6 | FR A510 Q5029 |
| 70 | 75 | 9.7 | 70.5 | FR 7005 Q5038 | 110 | 115 | 9.7 | 110.6 | FR B008 Q5038 |
| 70 | 75 | 15 | 70.5 | FR 7004 Q5038 | 110 | 115 | 15 | 110.6 | FR B009 Q5038 |
| 75 | 80 | 5.6 | 75.5 | FR 7503 Q5038 | 110 | 115 | 25 | 110.6 | FR B011 Q5038 |
| 75 | 80 | 6.3 | 75.5 | FR 7504 Q5038 | 110 | 120 | 15 | 110.6 | FR B007 Q5038 |
| 75 | 80 | 9.7 | 75.5 | FR 7506 Q5038 | 110 | 125 | 25 | 110.6 | FR B025 Q5038 |
| 75 | 80 | 15 | 75.5 | FR 7505 Q5038 | 114 | 120 | 10 | 114.6 | FR B040 Q5038 |
| 80 | 84 | 15 | 80.5 | FR 8009 Q5038 | 115 | 120 | 15 | 115.6 | FR B053 Q5038 |
| 80 | 85 | 5.6 | 80.5 | FR 8085 Q5038 | 115 | 120 | 25 | 115.6 | FR B525 Q5038 |
| 80 | 85 | 9.7 | 80.5 | FR 8010 Q5038 | 120 | 125 | 9.7 | 120.6 | FR C051 Q5038 |
| 80 | 85 | 15 | 80.5 | FR 8012 Q5038 | 120 | 125 | 15 | 120.6 | FR C052 Q5038 |
| 80 | 85 | 25 | 80.5 | FR 8014 Q5029 | 120 | 125 | 25 | 120.6 | FR C026 Q5038 |
| 83 | 88 | 9.7 | 83.5 | FR 8388 Q5038 | 125 | 130 | 9.7 | 125.6 | FR C053 Q5038 |
| 85 | 90 | 9.7 | 85.5 | FR 8509 Q5038 | 125 | 130 | 15 | 125.6 | FR C055 Q5038 |
| 85 | 90 | 15 | 85.5 | FR 8515 Q5038 | 125 | 130 | 25 | 125.6 | FR C030 Q5038 |
| 85 | 90 | 25 | 85.5 | FR 8525 Q5038 | 126 | 130 | 15 | 126.6 | FR C130 Q5038 |
| 85 | 95 | 25 | 85.5 | FR 8510 Q5038 | 130 | 135 | 15 | 130.6 | FR D005 Q5038 |
| 86 | 90 | 10 | 86.5 | FR 8690 Q5038 | 135 | 140 | 9.7 | 135.6 | FR D050 Q5038 |
| 90 | 95 | 9.7 | 90.5 | FR 9094 Q5038 | 135 | 140 | 15 | 135.6 | FR D051 Q5038 |
| 90 | 95 | 15 | 90.5 | FR 9095 Q5038 | 135 | 140 | 25 | 135.6 | FR D052 Q5038 |
| 90 | 95 | 20 | 90.5 | FR 9020 Q5038 | 136 | 140 | 15 | 136.6 | FR D140 Q5038 |
| 90 | 95 | 25 | 90.5 | FR 9025 Q5038 | 140 | 145 | 9.7 | 140.7 | FR E031 Q5029 |
| 90 | 95 | 30 | 90.5 | FR 9030 Q5038 | 140 | 145 | 15 | 140.7 | FR E038 Q5038 |
| 90 | 100 | 15 | 90.5 | FR 9010 Q5038 | 140 | 145 | 25 | 140.7 | FR E032 Q5038 |
| 95 | 100 | 9.7 | 95.6 | FR 9510 Q5038 | 145 | 150 | 9.7 | 145.7 | FR E047 Q5029 |
| 95 | 100 | 15 | 95.6 | FR 9511 Q5038 | 145 | 150 | 15 | 145.7 | FR E050 Q5029 |
| 100 | 105 | 5.6 | 100.6 | FR A003 Q5038 | 150 | 155 | 9.7 | 150.7 | FR F009 Q5038 |
| 100 | 105 | 9.7 | 100.6 | FR A004 Q5038 | 150 | 155 | 25 | 150.7 | FR F015 Q5038 |
| 100 | 105 | 15 | 100.6 | FR A005 Q5038 | 155 | 160 | 9.7 | 155.7 | FR F051 Q5038 |
| 100 | 105 | 20 | 100.6 | FR A006 Q5038 | 155 | 160 | 15 | 155.7 | FR F052 Q5038 |
| 100 | 105 | 25 | 100.6 | FR A025 Q5038 | 160 | 165 | 9.7 | 160.7 | FR G008 Q5038 |
| 100 | 110 | 25 | 100.6 | FR A027 Q5038 | 160 | 165 | 25 | 160.7 | FR G025 Q5038 |


Further sizes on request.

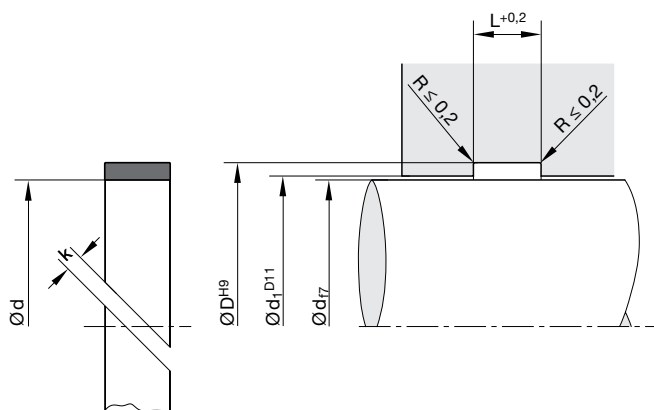

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | L | d ₁ | Order code | d | D | L | d ₁ | Order code |
|-----|-----|-----|----------------|---------------|-----|-----|----|----------------|---------------|
| 165 | 170 | 9.7 | 165.7 | FR G565 Q5029 | 245 | 250 | 15 | 245.7 | FR N042 Q5038 |
| 165 | 170 | 15 | 165.7 | FR G570 Q5038 | 245 | 250 | 25 | 245.7 | FR N045 Q5038 |
| 170 | 175 | 9.7 | 170.7 | FR H024 Q5038 | 250 | 255 | 15 | 250.7 | FR N520 Q5038 |
| 170 | 175 | 15 | 170.7 | FR H015 Q5038 | 250 | 255 | 25 | 250.7 | FR N525 Q5038 |
| 170 | 175 | 25 | 170.7 | FR H025 Q5038 | 260 | 265 | 15 | 260.7 | FR O008 Q5038 |
| 175 | 180 | 9.7 | 175.7 | FR H050 Q5029 | 260 | 265 | 25 | 260.7 | FR O010 Q5029 |
| 175 | 180 | 15 | 175.7 | FR H051 Q5029 | 260 | 266 | 30 | 260.7 | FR O011 Q5038 |
| 175 | 180 | 25 | 175.7 | FR H053 Q5029 | 265 | 270 | 15 | 265.7 | FR O515 Q5038 |
| 176 | 181 | 38 | 176.7 | FR H062 Q5038 | 265 | 270 | 25 | 265.7 | FR O520 Q5038 |
| 180 | 185 | 15 | 180.7 | FR J019 Q5038 | 270 | 275 | 25 | 270.7 | FR O706 Q5038 |
| 180 | 185 | 25 | 180.7 | FR J020 Q5038 | 275 | 280 | 15 | 275.8 | FR O715 Q5029 |
| 180 | 185 | 38 | 180.7 | FR J021 Q5038 | 275 | 280 | 20 | 275.8 | FR O720 Q5038 |
| 185 | 190 | 25 | 185.7 | FR J525 Q5038 | 275 | 280 | 25 | 275.8 | FR O725 Q5038 |
| 186 | 190 | 15 | 186.7 | FR J060 Q5038 | 280 | 270 | 23 | 280.8 | FR P023 Q5038 |
| 190 | 195 | 15 | 190.7 | FR K012 Q5038 | 280 | 285 | 15 | 280.8 | FR P015 Q5038 |
| 195 | 200 | 9.7 | 195.7 | FR K049 Q5038 | 280 | 290 | 25 | 280.8 | FR P025 Q5038 |
| 195 | 200 | 15 | 195.7 | FR K052 Q5038 | 295 | 300 | 15 | 295.8 | FR P551 Q5029 |
| 195 | 200 | 25 | 195.7 | FR K051 Q5038 | 300 | 305 | 25 | 301 | FR Q005 Q5038 |
| 200 | 205 | 15 | 200.7 | FR L004 Q5038 | 305 | 310 | 15 | 306 | FR Q002 Q5038 |
| 200 | 205 | 25 | 200.7 | FR L025 Q5038 | 310 | 315 | 25 | 311 | FR Q010 Q5029 |
| 202 | 210 | 25 | 205.7 | FR L050 Q5038 | 314 | 320 | 30 | 315 | FR Q011 Q5038 |
| 205 | 210 | 25 | 205.7 | FR L065 Q5038 | 315 | 320 | 15 | 316 | FR Q014 Q5029 |
| 205 | 210 | 25 | 205.7 | FR L075 Q5038 | 315 | 320 | 25 | 316 | FR Q015 Q5029 |
| 210 | 215 | 25 | 210.7 | FR L509 Q5038 | 320 | 325 | 15 | 321 | FR Q215 Q5038 |
| 215 | 220 | 15 | 215.7 | FR L520 Q5038 | 320 | 325 | 25 | 321 | FR Q217 Q5038 |
| 215 | 220 | 20 | 215.7 | FR L524 Q5029 | 325 | 330 | 20 | 326 | FR Q230 Q5038 |
| 215 | 220 | 25 | 215.7 | FR L525 Q5038 | 325 | 330 | 25 | 326 | FR Q233 Q5038 |
| 220 | 225 | 9.7 | 220.7 | FR M004 Q5038 | 335 | 340 | 15 | 336 | FR Q334 Q5038 |
| 220 | 225 | 15 | 220.7 | FR M005 Q5038 | 345 | 350 | 25 | 346 | FR Q425 Q5038 |
| 222 | 227 | 15 | 222.7 | FR M070 Q5038 | 350 | 355 | 15 | 351 | FR Q050 Q5038 |
| 230 | 235 | 25 | 230.7 | FR M525 Q5038 | 350 | 355 | 15 | 351 | FR Q515 Q5038 |
| 235 | 240 | 9.7 | 235.7 | FR M554 Q5038 | 350 | 355 | 25 | 351 | FR Q051 Q5038 |
| 235 | 240 | 25 | 235.7 | FR M560 Q5038 | 350 | 360 | 25 | 351 | FR Q060 Q5038 |
| 235 | 250 | 25 | 235.7 | FR M600 Q5038 | 355 | 360 | 20 | 356 | FR Q552 Q5029 |

Further sizes on request.

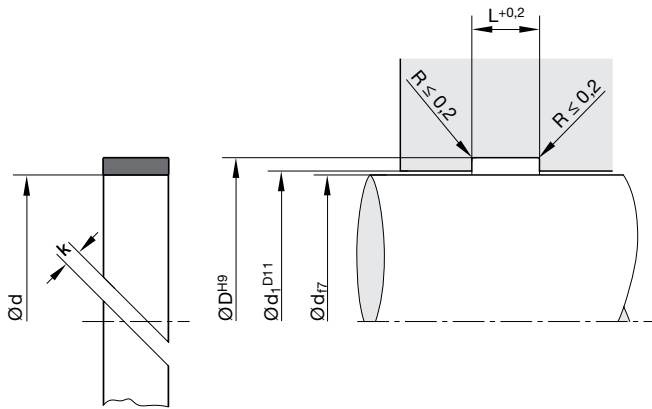

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | L | d ₁ | Order code |
|-----|-----|-----|----------------|---------------|
| 355 | 360 | 40 | 356 | FR Q555 Q5038 |
| 375 | 380 | 15 | 376 | FR Q715 Q5038 |
| 375 | 380 | 25 | 376 | FR Q725 Q5038 |
| 390 | 395 | 25 | 391 | FR Q900 Q5038 |
| 440 | 445 | 15 | 441 | FR R024 Q5038 |
| 445 | 450 | 25 | 446 | FR R025 Q5038 |
| 460 | 465 | 9.5 | 461 | FR R465 Q5038 |
| 465 | 470 | 15 | 466 | FR R615 Q5038 |
| 495 | 500 | 15 | 496 | FR R915 Q5038 |
| 575 | 580 | 25 | 576 | FR S075 Q5038 |
| 600 | 605 | 25 | 601 | FR S610 Q5038 |

Further sizes on request.



The FK guide ring made of fabric phenolic resin laminate is intended for use in hydraulic cylinders. The guide ring is created in a slit form (45° cut) to enable installation. In addition, the slit version ensures that the system pressure can pass toward the seal, taking thermal expansions into account.

The FK guide ring is exceptionally pressure-resistant and wear-resistant. Pressure resistance is much higher than that of guiding elements made of other plastics.

After installation, the FK guide ring has an interference fit against the bottom of the groove.

- Minimal play due to extremely small manufacturing tolerances of the guiding elements.
- Vibration absorption effect.
- Extreme wear resistance.
- Improved sliding properties due to surface structure.
- Easy snap assembly on a single-part piston.
- Significantly higher permissible loading pressure compared with other guidance tape materials.
- Dimensions according to DIN 10766.
- Also available as bulk material.
- Any desired nominal diameter available due to use of machining technique.
- Installation in closed and undercut housings.

Range of application

Guiding element for pistons and piston rods in hydraulic cylinders.

Operating temperature

| | |
|----------------------------|-------------------|
| FKS525Q5038 | -50 °C to +130 °C |
| FK Q5029 | -50 °C to +120 °C |
| in HFA, HFB and HFC fluids | -30 °C to +80 °C |
| in water max. | + 100 °C |

Pressure resistance acc. to DIN 53454

| | |
|-------------|-----------------------|
| FKS525Q5038 | 340 N/mm ² |
| FK Q5029 | 270 N/mm ² |

Water absorption acc. to DIN 53495

| | |
|-------------|------------|
| FKS525Q5038 | < 0.1 % |
| FK Q5029 | 1 % to 2 % |

Sliding speed

≤ 0.5 m/s

Compounds

Duroplastic synthetic resins with fabric reinforcement.

Q5029: phenole resin-cotton laminate.

Q5038: phenole resin-acrylic fabric laminate.

Installation

For surface requirements, see chapter „General Installation Guidelines“.

For nonferrous and light metal pistons, please use our F3 guidance tape profile (PTFE with carbon filler).

The installed rings must have a gap „k“ between their diagonally cut ends:

$$k = 0.008 \times d + 2$$

The calculated values for „k“ are rounded up to the nearest millimetre or half-millimetre.

The calculation of the permissible radial force is based on the projected area $D \times L$.

Example: permissible radial force F_R for a cylinder diameter of $D = 80$ mm, length $L = 15$ mm, compound Q5038T and safety factor 4:


$$F_R = \frac{D \times L \times q}{v} = \frac{80 \times 15 \times 270}{4} = 81\,000 \text{ N}$$

Recommendation for determining the safety factor v : $v > 3$

Calculation of elongated length

“U” (piston) = $\pi \times (D - S) \cdot k$

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

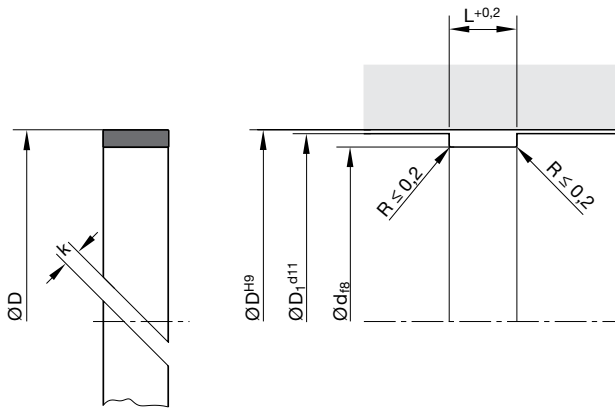


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example

Guide ring profile FK for a piston diameter of 100 mm.


| | |
|----------------|--------------------------------|
| Order code | FK A095 Q5029 (100 × 95 × 9.7) |
| FK | Profile reference |
| A095 | Dimension code |
| Q5029 or Q5038 | Standard compound |
| D × d × L | Nominal dimensions |

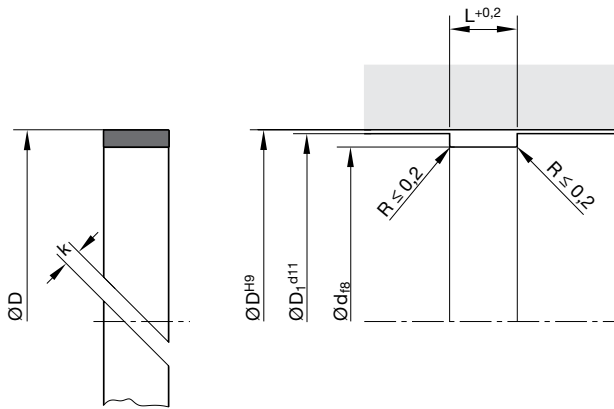

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | L | D ₁ | Order code | D | d | L | D ₁ | Order code |
|----|----|-----|----------------|---------------|-----|-----|-----|----------------|---------------|
| 25 | 20 | 5.6 | 24.8 | FK 2520 Q5038 | 80 | 75 | 15 | 79.5 | FK 8015 Q5038 |
| 25 | 20 | 9.7 | 24.8 | FK 2597 Q5038 | 80 | 75 | 25 | 79.5 | FK 8077 Q5038 |
| 28 | 23 | 6.3 | 27.8 | FK 2923 Q5029 | 85 | 80 | 6.3 | 84.5 | FK 8580 Q5029 |
| 32 | 27 | 5.6 | 31.8 | FK 3227 Q5038 | 85 | 80 | 9.7 | 84.5 | FK 8581 Q5038 |
| 32 | 27 | 9.7 | 31.8 | FK 3228 Q5038 | 85 | 80 | 15 | 84.5 | FK 8515 Q5038 |
| 35 | 30 | 5.6 | 34.8 | FK 3530 Q5038 | 90 | 85 | 5.6 | 89.5 | FK 9084 Q5038 |
| 35 | 30 | 9.7 | 34.8 | FK 3597 Q5038 | 90 | 85 | 9.7 | 89.5 | FK 9086 Q5038 |
| 36 | 31 | 5.6 | 35.8 | FK 3631 Q5038 | 90 | 85 | 15 | 89.5 | FK 9015 Q5038 |
| 40 | 35 | 5.6 | 39.7 | FK 4035 Q5038 | 90 | 85 | 25 | 89.5 | FK 9085 Q5038 |
| 40 | 35 | 9.7 | 39.7 | FK 4097 Q5038 | 95 | 90 | 5.6 | 94.5 | FK 9591 Q5038 |
| 42 | 37 | 5.6 | 41.7 | FK 4237 Q5038 | 95 | 90 | 9.7 | 94.5 | FK 9590 Q5038 |
| 45 | 40 | 5.6 | 44.6 | FK 4540 Q5029 | 95 | 90 | 15 | 94.5 | FK 9515 Q5038 |
| 45 | 40 | 9.7 | 44.6 | FK 4597 Q5038 | 100 | 95 | 5.6 | 99.4 | FK A094 Q5038 |
| 50 | 45 | 5.6 | 49.6 | FK 5043 Q5038 | 100 | 95 | 9.7 | 99.4 | FK A095 Q5038 |
| 50 | 45 | 9.7 | 49.6 | FK 5045 Q5029 | 100 | 95 | 15 | 99.4 | FK 9513 Q5038 |
| 55 | 50 | 5.6 | 54.6 | FK 5550 Q5029 | 105 | 100 | 9.7 | 104.4 | FK A500 Q5038 |
| 55 | 50 | 9.7 | 54.6 | FK 5597 Q5038 | 105 | 100 | 15 | 104.4 | FK A515 Q038 |
| 60 | 55 | 5.6 | 59.6 | FK 6055 Q5038 | 110 | 105 | 9.7 | 109.4 | FK B005 Q5038 |
| 60 | 55 | 9.7 | 59.6 | FK 6097 Q5038 | 110 | 105 | 15 | 109.4 | FK B015 Q5038 |
| 63 | 58 | 5.6 | 62.6 | FK 5356 Q5038 | 115 | 110 | 9.7 | 114.4 | FK B510 Q5038 |
| 63 | 58 | 6.3 | 62.6 | FK 6359 Q5038 | 115 | 110 | 15 | 114.4 | FK B110 Q5029 |
| 63 | 58 | 9.7 | 62.6 | FK 6397 Q5038 | 120 | 115 | 9.7 | 119.4 | FK C115 Q5029 |
| 65 | 60 | 5.6 | 64.5 | FK 6561 Q5038 | 120 | 115 | 15 | 119.4 | FK C120 Q5038 |
| 65 | 60 | 6.3 | 64.5 | FK 6560 Q5038 | 125 | 120 | 9.7 | 124.4 | FK C520 Q5038 |
| 65 | 60 | 9.7 | 64.5 | FK 6597 Q5038 | 125 | 120 | 15 | 124.4 | FK C525 Q5038 |
| 70 | 65 | 5.6 | 69.5 | FK 7030 Q5038 | 130 | 125 | 9.7 | 129.4 | FK D026 Q5038 |
| 70 | 65 | 6.3 | 69.5 | FK 7065 Q5029 | 130 | 125 | 15 | 129.4 | FK D045 Q5038 |
| 70 | 65 | 9.7 | 69.5 | FK 7097 Q5038 | 140 | 135 | 9.7 | 139.4 | FK E035 Q5038 |
| 70 | 65 | 15 | 69.5 | FK 7015 Q5038 | 140 | 135 | 15 | 139.4 | FK E015 Q5038 |
| 75 | 70 | 5.6 | 74.5 | FK 7569 Q5038 | 145 | 140 | 9.7 | 144.3 | FK E540 Q5038 |
| 75 | 70 | 9.7 | 74.5 | FK 7570 Q5029 | 145 | 140 | 15 | 144.3 | FK E550 Q5038 |
| 75 | 70 | 15 | 74.5 | FK 7515 Q5038 | 150 | 145 | 9.7 | 149.3 | FK F045 Q5038 |
| 80 | 75 | 6.3 | 79.5 | FK 8075 Q5029 | 150 | 145 | 15 | 149.3 | FK F050 Q5038 |
| 80 | 75 | 9.7 | 79.5 | FK 8076 Q5038 | 155 | 150 | 9.7 | 154.3 | FK F550 Q5038 |


Further sizes on request.

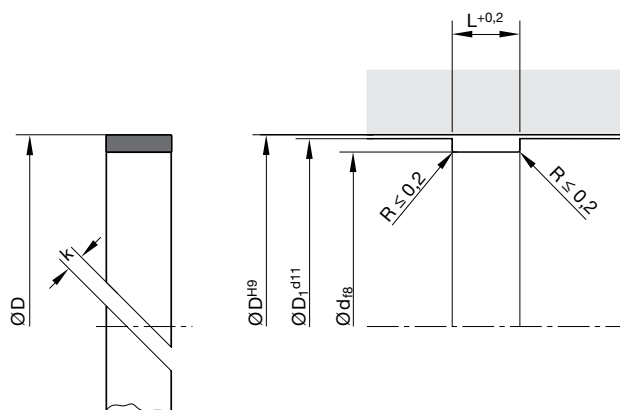

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | L | D ₁ | Order code | D | d | L | D ₁ | Order code |
|-----|-----|-----|----------------|---------------|-----|-----|----|----------------|---------------|
| 155 | 150 | 15 | 154.3 | FK F551 Q5038 | 230 | 225 | 25 | 229.3 | FK M225 Q5038 |
| 155 | 150 | 25 | 154.3 | FK F525 Q5038 | 240 | 235 | 15 | 239.3 | FK N036 Q5038 |
| 160 | 155 | 9.7 | 159.3 | FK G055 Q5038 | 240 | 235 | 25 | 239.3 | FK N050 Q5038 |
| 160 | 155 | 15 | 159.3 | FK G056 Q5029 | 250 | 245 | 15 | 249.3 | FK N046 Q5038 |
| 160 | 155 | 20 | 159.3 | FK G025 Q5038 | 250 | 245 | 25 | 249.3 | FK N245 Q5038 |
| 165 | 160 | 9.7 | 164.3 | FK G560 Q5038 | 255 | 250 | 15 | 254.3 | FK N550 Q5038 |
| 165 | 160 | 15 | 164.3 | FK G561 Q5038 | 255 | 250 | 25 | 254.3 | FK N525 Q5038 |
| 165 | 160 | 25 | 164.3 | FK G525 Q5038 | 260 | 255 | 15 | 259.3 | FK O015 Q5038 |
| 170 | 165 | 9.7 | 169.3 | FK H065 Q5038 | 260 | 255 | 25 | 259.3 | FK O025 Q5038 |
| 170 | 165 | 15 | 169.3 | FK H066 Q5038 | 265 | 260 | 15 | 264.3 | FK O660 Q5038 |
| 170 | 165 | 25 | 169.3 | FK H075 Q5038 | 265 | 260 | 25 | 264.3 | FK O625 Q5038 |
| 175 | 170 | 9.7 | 174.3 | FK H570 Q5038 | 270 | 265 | 15 | 269.3 | FK O065 Q5038 |
| 175 | 170 | 15 | 174.3 | FK H571 Q5038 | 270 | 265 | 25 | 269.3 | FK O075 Q5038 |
| 175 | 170 | 25 | 174.3 | FK H525 Q5038 | 275 | 270 | 15 | 274.3 | FK O515 Q5038 |
| 180 | 175 | 9.7 | 179.3 | FK J075 Q5038 | 275 | 270 | 25 | 274.3 | FK O525 Q5038 |
| 180 | 175 | 15 | 179.3 | FK J175 Q5038 | 280 | 275 | 15 | 279.2 | FK P076 Q5038 |
| 180 | 175 | 25 | 179.3 | FK J025 Q5038 | 280 | 275 | 25 | 279.2 | FK P025 Q5038 |
| 190 | 185 | 9.7 | 189.3 | FK K165 Q5038 | 285 | 280 | 15 | 284.2 | FK P580 Q5038 |
| 190 | 185 | 15 | 189.3 | FK K175 Q5038 | 285 | 280 | 25 | 284.2 | FK P525 Q5038 |
| 190 | 185 | 25 | 189.3 | FK K185 Q5038 | 290 | 285 | 15 | 289.2 | FK P085 Q5038 |
| 200 | 195 | 9.7 | 199.3 | FK L095 Q5038 | 290 | 285 | 25 | 289.2 | FK P095 Q5038 |
| 200 | 195 | 15 | 199.3 | FK L096 Q5029 | 300 | 295 | 15 | 299.2 | FK Q001 Q5038 |
| 200 | 195 | 25 | 199.3 | FK L195 Q5038 | 300 | 295 | 25 | 299.2 | FK Q000 Q5038 |
| 205 | 200 | 15 | 204.3 | FK L500 Q5038 | 310 | 305 | 15 | 309 | FK Q010 Q5038 |
| 205 | 200 | 25 | 204.3 | FK L525 Q5038 | 310 | 305 | 25 | 309 | FK Q025 Q5038 |
| 210 | 205 | 15 | 209.3 | FK L005 Q5038 | 320 | 315 | 15 | 319 | FK Q020 Q5038 |
| 210 | 205 | 25 | 209.3 | FK L026 Q5038 | 320 | 315 | 25 | 319 | FK Q021 Q5038 |
| 215 | 210 | 15 | 214.3 | FK L520 Q5038 | 330 | 325 | 15 | 329 | FK Q015 Q5038 |
| 215 | 210 | 25 | 214.3 | FK L526 Q5038 | 330 | 325 | 25 | 329 | FK Q030 Q5038 |
| 220 | 215 | 15 | 219.3 | FK M015 Q5038 | 350 | 345 | 15 | 349 | FK Q315 Q5038 |
| 220 | 215 | 25 | 219.3 | FK M016 Q5038 | 350 | 345 | 25 | 349 | FK Q346 Q5038 |
| 225 | 220 | 15 | 224.3 | FK M520 Q5038 | 380 | 375 | 15 | 379 | FK Q070 Q5038 |
| 225 | 220 | 25 | 224.3 | FK M525 Q5038 | 380 | 375 | 25 | 379 | FK Q080 Q5038 |
| 230 | 225 | 15 | 229.3 | FK M025 Q5038 | 400 | 395 | 15 | 399 | FK R015 Q5038 |




Further sizes on request.

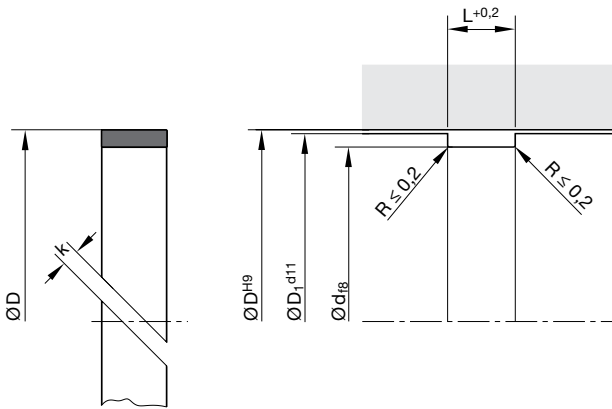

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | L | D ₁ | Order code |
|-----|-----|----|----------------|---------------|
| 400 | 395 | 25 | 399 | FK R025 Q5038 |
| 450 | 445 | 25 | 449 | FK R445 Q5038 |
| 450 | 445 | 25 | 449 | FK R450 Q5038 |
| 500 | 495 | 15 | 499 | FK S500 Q5038 |
| 500 | 495 | 25 | 499 | FK S525 Q5038 |

Further sizes on request.

| Profile cross-section | Profile reference | Pressure max. (bar) | Page |
|---|-------------------|---------------------|------|
| Rod seals | | | |
|  | C1 | 160 | 78 |
|  | GS | 250 | 83 |
|  | HL | 250 | 86 |
|  | R3 | 315 | 88 |
|  | B3 | 400 | 91 |
|  | BS | 400 | 95 |
|  | OD | 400 | 98 |
|  | BD | 500 | 104 |
|  | BU | 500 | 106 |



The C1 rod seal is a U-ring with interference fit on the outer diameter. Excellent sealing performance is achieved with minimal profile width and height. Extremely low friction due to short seal contact area. Use in pneumatic equipment is only possible with constant lubricant supply, e.g. oiled air. For non-oiled (dry air) pneumatic systems, we recommend our E5 product series.

- Good wear resistance.
- Easy installation.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Installation in closed and undercut housings.

Range of application

The C1 rod seal is particularly suitable for plungers, piston rods, stems and valve lifters as well as for slowly operating pneumatic rotors ($v \leq 0.2$ m/s).

Operating pressure ¹⁾

| | |
|----------------------|----------------|
| Hydraulics | ≤ 160 bar |
| Pneumatics | ≤ 16 bar |
| Rotary transmissions | ≤ 20 bar |

Operating temperature

| | |
|------------|-------------------|
| Hydraulics | -35 °C to +100 °C |
| Pneumatics | -35 °C to +80 °C |

Sliding speed

| | |
|----------------------|----------------|
| Hydraulics | ≤ 0.5 m/s |
| Pneumatics | ≤ 1 m/s |
| Rotary transmissions | ≤ 0.2 m/s |

Recommendation for rotary transmissions: $P \times v \leq 3$

(Definition see catalogue „Hydraulic Seals“, chapter „Rotary Seals“, introduction).

¹⁾ Dependent upon cross-section and compound.

Compounds

Standard: N3571, NBR compound (≈ 70 Shore A).

For low temperatures: N8602, NBR compound (≈ 70 Shore A).

For high temperatures: V3664, FKM compound (≈ 85 Shore A).


Installation

The profile C1 rod seals are manufactured over-sized on the external diameters in relation to the nominal dimensions. This ensures the required tight fit. Only after installation the sealing lip diameter will show the desired dimensions. Profile C1 can easily be snapped into the grooves.

When choosing a seal for a particular diameter, it is best to select the one with the largest possible cross-section.

Note: For nominal diameters ≤ 25 mm an open housing is recommended, according to the seals cross-section and the position of the groove (stuffing box installation).

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

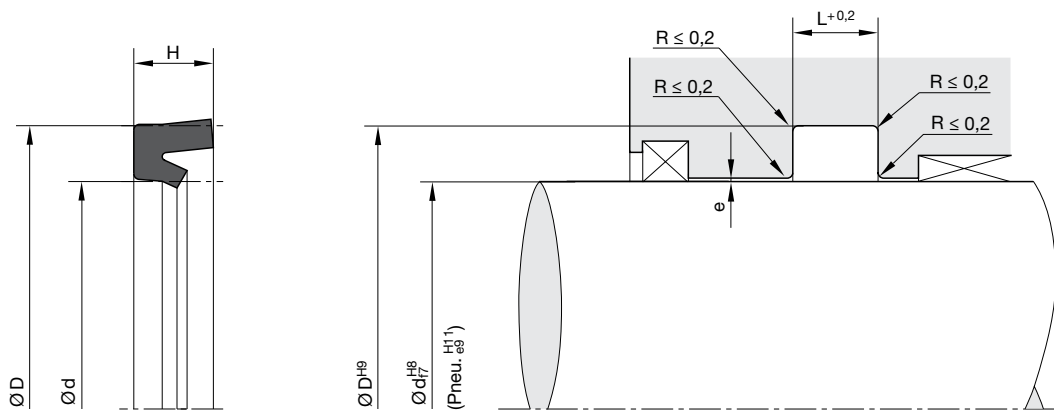


„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | Order code | d | D | H | L | Order code |
|-----|------|-----|-----|---------------|-------|------|-----|-----|---------------|
| 2 | 7 | 3.5 | 4 | C1 0003 N3571 | 12 | 18.5 | 4.5 | 5 | C1 1028 N3571 |
| 3 | 7 | 3 | 3.5 | C1 0005 N3571 | 12 | 19 | 4.5 | 5 | C1 1030 N3571 |
| 3 | 9 | 4.5 | 5 | C1 0009 N3571 | 12 | 20 | 5.5 | 6 | C1 1033 N3571 |
| 3 | 10 | 5 | 5.5 | C1 0011 N3571 | 12.75 | 19.2 | 3.8 | 4.3 | C1 1035 N3571 |
| 4 | 8 | 3 | 3.5 | C1 0013 N3571 | 13 | 17.5 | 2.8 | 3.3 | C1 1036 N3571 |
| 4 | 9 | 3.5 | 4 | C1 0016 N3571 | 13.8 | 22 | 5.5 | 6 | C1 1037 N3571 |
| 4 | 10 | 4.2 | 4.7 | C1 0019 N3571 | 14 | 19 | 3.5 | 4 | C1 1039 N3571 |
| 4 | 12 | 4.5 | 5 | C1 0022 N3571 | 14 | 20 | 4.8 | 5.3 | C1 1040 N3571 |
| 4 | 12 | 5.5 | 6 | C1 0024 N3571 | 14 | 22 | 5.5 | 6 | C1 1041 N3571 |
| 4.5 | 8 | 3 | 3.5 | C1 0032 N3571 | 14 | 25 | 8 | 8.5 | C1 1042 N3571 |
| 5 | 9 | 2.5 | 3 | C1 0035 N3571 | 15 | 22 | 5 | 5.5 | C1 1044 N3571 |
| 5 | 10 | 4 | 4.5 | C1 0038 N3571 | 16 | 22.5 | 4.5 | 5 | C1 1049 N3571 |
| 5 | 12 | 4.5 | 5 | C1 0041 N3571 | 16 | 23 | 5.5 | 6 | C1 1051 N3571 |
| 6 | 10 | 3 | 3.5 | C1 0055 N3571 | 16 | 24 | 5.5 | 6 | C1 1053 N3571 |
| 6 | 12 | 4.2 | 4.7 | C1 0058 N3571 | 16 | 26 | 7 | 7.5 | C1 1056 N3571 |
| 6 | 13 | 5 | 5.5 | C1 0059 N3571 | 17 | 25 | 5.5 | 6 | C1 1060 N3571 |
| 6 | 15 | 7 | 7.5 | C1 0062 N3571 | 18 | 25 | 4.5 | 5 | C1 1062 N3571 |
| 6 | 16 | 5 | 5.5 | C1 0065 N3571 | 18 | 25 | 5.5 | 6 | C1 1063 N3571 |
| 7 | 13 | 4 | 4.5 | C1 0070 N3571 | 18 | 26 | 5.5 | 6 | C1 1066 N3571 |
| 8 | 14 | 4 | 4.5 | C1 0074 N3571 | 18.5 | 25.5 | 5.5 | 6 | C1 1074 N3571 |
| 8 | 14.5 | 4.5 | 5 | C1 0077 N3571 | 20 | 26 | 4 | 4.5 | C1 2003 N3571 |
| 8 | 16 | 5.5 | 6 | C1 0080 N3571 | 20 | 26 | 4.8 | 5.3 | C1 2005 N3571 |
| 8 | 18 | 8 | 8.5 | C1 0083 N3571 | 20 | 28 | 5.5 | 6 | C1 2009 N3571 |
| 9 | 14 | 3.5 | 4 | C1 0087 N3571 | 20 | 28 | 8 | 8.5 | C1 2013 N3571 |
| 9.3 | 14 | 3 | 3.5 | C1 0090 N3571 | 20 | 30 | 7 | 7.5 | C1 2020 N3571 |
| 9.5 | 18.5 | 7 | 7.5 | C1 0094 N3571 | 20 | 32 | 7 | 7.5 | C1 2022 N3571 |
| 10 | 13.6 | 2.3 | 2.7 | C1 1002 N3571 | 22 | 29 | 5.5 | 6 | C1 2025 N3571 |
| 10 | 15 | 3.5 | 4 | C1 1005 N3571 | 22 | 30 | 5.5 | 6 | C1 2029 N3571 |
| 10 | 16 | 4.5 | 5 | C1 1008 N3571 | 23 | 31 | 5.5 | 6 | C1 2038 N3571 |
| 10 | 16 | 6 | 6.5 | C1 1011 N3571 | 24 | 32 | 5.5 | 6 | C1 2043 N3571 |
| 10 | 18 | 5.5 | 6 | C1 1015 N3571 | 25 | 32 | 5.5 | 6 | C1 2053 N3571 |
| 10 | 20 | 7 | 7.5 | C1 1018 N3571 | 25 | 33 | 5.5 | 6 | C1 2058 N3571 |
| 11 | 17 | 4 | 4.5 | C1 1022 N3571 | 25 | 33 | 8 | 8.5 | C1 2061 N3571 |
| 11 | 18 | 4.5 | 5 | C1 1025 N3571 | 25 | 35 | 6 | 6.5 | C1 2064 N3571 |

Further sizes on request.

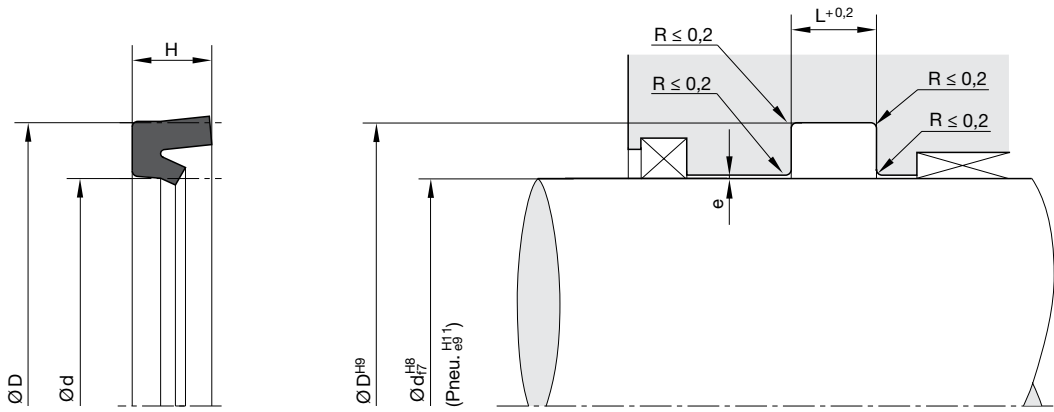


„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | Order code | d | D | H | L | Order code |
|----|----|-----|-----|---------------|-----|-----|-----|-----|---------------|
| 25 | 35 | 7 | 7.5 | C1 2065 N3571 | 55 | 65 | 7 | 7.5 | C1 5040 N3571 |
| 25 | 37 | 8.5 | 9.5 | C1 2069 N3571 | 56 | 66 | 7 | 7.5 | C1 5043 N3571 |
| 25 | 40 | 10 | 11 | C1 2075 N3571 | 58 | 68 | 7 | 7.5 | C1 5058 N3571 |
| 26 | 36 | 7 | 7.5 | C1 2078 N3571 | 60 | 72 | 8.5 | 9.5 | C1 6005 N3571 |
| 28 | 36 | 5.5 | 6 | C1 2085 N3571 | 60 | 80 | 14 | 15 | C1 6010 N3571 |
| 28 | 38 | 7 | 7.5 | C1 2089 N3571 | 63 | 73 | 7 | 7.5 | C1 6025 N3571 |
| 30 | 38 | 5.5 | 6 | C1 3005 N3571 | 63 | 75 | 8.5 | 9.5 | C1 6035 N3571 |
| 30 | 38 | 8 | 8.5 | C1 3010 N3571 | 63 | 78 | 8.5 | 9.5 | C1 6036 N3584 |
| 30 | 40 | 7 | 7.5 | C1 3015 N3571 | 64 | 76 | 7.5 | 8 | C1 6040 N3571 |
| 30 | 42 | 8 | 8.5 | C1 3019 N3571 | 65 | 77 | 8.5 | 9.5 | C1 6055 N3571 |
| 30 | 42 | 8.5 | 9.5 | C1 3020 N3571 | 68 | 80 | 8.5 | 9.5 | C1 6070 N3571 |
| 32 | 40 | 5.5 | 6 | C1 3025 N3571 | 70 | 82 | 8.5 | 9.5 | C1 7003 N3571 |
| 32 | 42 | 7 | 7.5 | C1 3030 N3571 | 75 | 87 | 8.5 | 9.5 | C1 7020 N3571 |
| 33 | 43 | 7 | 7.5 | C1 3035 N3571 | 80 | 90 | 7 | 7.5 | C1 8010 N3571 |
| 34 | 44 | 7 | 7.5 | C1 3040 N3571 | 80 | 92 | 8.5 | 9.5 | C1 8015 N3571 |
| 35 | 43 | 8 | 8.5 | C1 3045 N3571 | 80 | 100 | 14 | 15 | C1 8025 N3571 |
| 35 | 45 | 7 | 7.5 | C1 3050 N3571 | 85 | 97 | 8.5 | 9.5 | C1 8040 N3571 |
| 36 | 46 | 7 | 7.5 | C1 3055 N3571 | 85 | 100 | 10 | 11 | C1 8045 N3571 |
| 36 | 50 | 10 | 11 | C1 3057 N3571 | 90 | 102 | 8.5 | 9.5 | C1 9015 N3571 |
| 38 | 48 | 7 | 7.5 | C1 3060 N3571 | 95 | 107 | 8.5 | 9.5 | C1 9035 N3571 |
| 40 | 48 | 8 | 8.5 | C1 4010 N3571 | 100 | 110 | 7 | 7.5 | C1 A010 N3571 |
| 40 | 50 | 7 | 7.5 | C1 4015 N3571 | 100 | 115 | 10 | 11 | C1 A015 N3571 |
| 40 | 52 | 8.5 | 9.5 | C1 4020 N3571 | 105 | 120 | 10 | 11 | C1 A051 N3571 |
| 42 | 52 | 7 | 7.5 | C1 4025 N3571 | 105 | 125 | 12 | 13 | C1 A055 N3571 |
| 44 | 54 | 7 | 7.5 | C1 4030 N3571 | 110 | 125 | 10 | 11 | C1 B015 N3571 |
| 45 | 55 | 7 | 7.5 | C1 4035 N3571 | 110 | 130 | 14 | 15 | C1 B020 N3571 |
| 46 | 56 | 7 | 7.5 | C1 4046 N3571 | 115 | 130 | 10 | 11 | C1 B040 N3571 |
| 47 | 57 | 7 | 7.5 | C1 4055 N3571 | 120 | 135 | 10 | 11 | C1 C015 N3571 |
| 48 | 58 | 7 | 7.5 | C1 4060 N3571 | 120 | 140 | 14 | 15 | C1 C020 N3571 |
| 50 | 58 | 8 | 8.5 | C1 5005 N3571 | 125 | 140 | 10 | 11 | C1 C035 N3571 |
| 50 | 60 | 7 | 7.5 | C1 5010 N3571 | 125 | 145 | 12 | 13 | C1 C037 N3571 |
| 50 | 63 | 8.5 | 9.5 | C1 5015 N3571 | 130 | 145 | 10 | 11 | C1 D015 N3571 |
| 50 | 66 | 11 | 12 | C1 5020 N3571 | 135 | 150 | 10 | 11 | C1 D035 N3571 |
| 54 | 64 | 7 | 7.5 | C1 5035 N3571 | 140 | 160 | 14 | 15 | C1 E015 N3571 |

Further sizes on request.

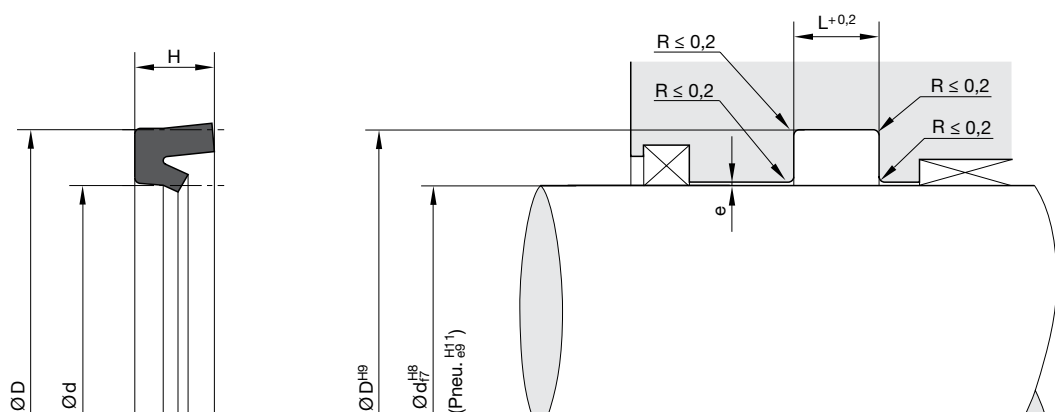

„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | Order code |
|-----|-----|----|----|---------------|
| 145 | 165 | 13 | 14 | C1 E050 N3571 |
| 150 | 170 | 14 | 15 | C1 F020 N3571 |
| 155 | 170 | 10 | 11 | C1 F053 N3571 |
| 160 | 180 | 14 | 15 | C1 G015 N3571 |
| 160 | 184 | 15 | 16 | C1 G024 N3571 |
| 170 | 190 | 14 | 15 | C1 H007 N3571 |
| 170 | 194 | 15 | 16 | C1 H010 N3571 |
| 180 | 200 | 14 | 15 | C1 J005 N3571 |
| 190 | 210 | 14 | 15 | C1 K010 N3571 |
| 200 | 220 | 14 | 15 | C1 L015 N3571 |
| 200 | 230 | 15 | 16 | C1 L025 N3571 |
| 210 | 230 | 14 | 15 | C1 L040 N3571 |
| 225 | 250 | 14 | 15 | C1 M020 N3571 |
| 235 | 265 | 21 | 22 | C1 M030 N3571 |
| 240 | 270 | 20 | 21 | C1 N035 N3571 |
| 260 | 280 | 14 | 15 | C1 O007 N3571 |
| 260 | 290 | 21 | 22 | C1 O010 N3571 |
| 280 | 310 | 20 | 21 | C1 O031 N3571 |
| 320 | 350 | 20 | 21 | C1 Q050 N3571 |

Further sizes on request.



The GS Ultrathan® rod seal is a U-ring with interference fit on the outer diameter. It has been developed specifically for the exacting requirements of gas spring applications, which in addition to small grooves are long service life and maximum gas tightness. The short seal contact area ensures minimum friction. In addition to gas spring applications, these properties make this seal suitable for use in hydraulic and pneumatic equipment with identical requirements profiles.

- Good wear resistance.
- Easy installation.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Installation in closed and undercut housings.

Range of application

The GS rod seal is particularly well suited for gas springs, piston rods, spindles and valve lifters as well as for slow-running rotary distributors ($v \leq 0.2$ m/s).

| | |
|----------------------------------|----------------|
| Operating pressure ¹⁾ | |
| Hydraulics | ≤ 200 bar |
| Gas springs | ≤ 200 bar |
| Rotary transmissions | ≤ 20 bar |
| Operating temperature | |
| -35 °C to +90 °C | |
| Sliding speed | |
| Hydraulics | ≤ 1 m/s |
| Gas springs | ≤ 1 m/s |
| Rotary transmissions | ≤ 0.2 m/s |

Recommendation for rotary transmissions: $P \times v \leq 3$
(For definition see catalogue „Hydraulic Seals“, chapter „Rotary Seals“, introduction).

¹⁾ Dependent upon cross-section and compound.

Compounds

Standard: P5008, TPU (≈ 94 Shore A).
 For high pressures (> 200 bar): P6000, TPU (≈ 94 Shore A).
 For low temperatures (> 55 °C): P5009, TPU (≈ 93 Shore A).
 For high temperatures (< 120 °C): P4300, TPU (≈ 92 Shore A).

Installation

Profile GS rod seals are manufactured with an oversized outer diameter, which results in the required secure press fit on the adhesion part. The sealing lip only achieves the required size during installation. GS rod seals can be easily snapped into the housing by deforming them in the shape of a kidney.

When selecting the seal for a certain diameter the seal with the largest possible cross-section should be given preference.

In the case of nominal diameters ≤ 25 mm, depending on the seal's cross-section and position of the installation groove, an open housing is recommended.

For applications in gas springs as opposed to the general installation guidelines con-


tained in our catalogues we recommend housings with improved surface requirements.

Dynamic sealing: $R_z < 0,5 \mu\text{m}$

Static sealing: $R_z < 1,0 \mu\text{m}$

Percentage of contact area: $t_p > 80 \%$

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

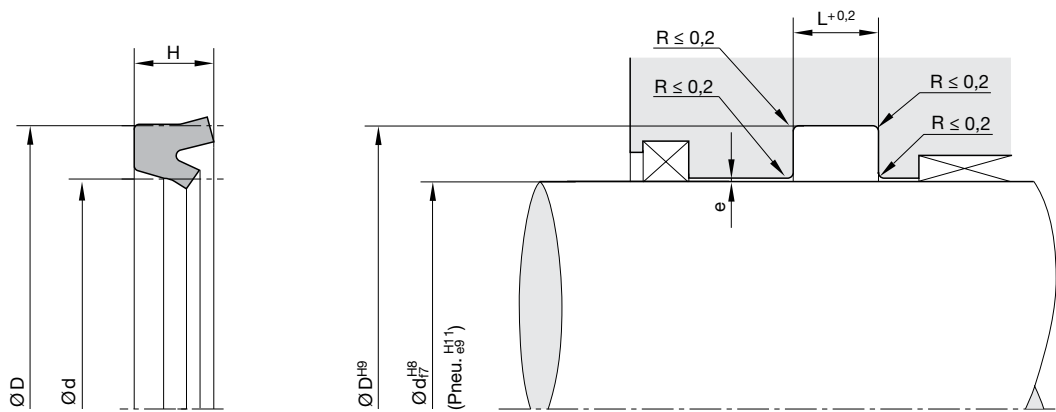

„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | Order code |
|----|-----|-----|-----|---------------|
| 3 | 6.5 | 3 | 3.5 | GS 0306 P5008 |
| 4 | 8 | 3 | 3.5 | GS 0408 P5008 |
| 5 | 9 | 2.6 | 3 | GS 0509 P5008 |
| 6 | 10 | 3 | 3.5 | GS 0610 P5008 |
| 8 | 14 | 4 | 4.5 | GS 0814 P5008 |
| 8 | 16 | 4.5 | 5 | GS 0816 P5008 |
| 10 | 16 | 4 | 4.5 | GS 1016 P5008 |
| 12 | 20 | 5.5 | 6 | GS 1220 P5008 |
| 14 | 22 | 5.5 | 6 | GS 1422 P5008 |
| 16 | 22 | 5 | 5.5 | GS 1622 P5008 |
| 20 | 28 | 5.5 | 6 | GS 2028 P5008 |

Further sizes on request.



The HL Ultrathan® rod seal is a friction-optimized sealing solution for mobile and stationary hydraulics featuring a unique functional principle. The single-acting rod seal with interference fit on the outer diameter has pressure-activated, cascading sealing edges for clearly reduced static and dynamic friction in hydraulic cylinders and higher effectiveness of hydraulic systems.

- Minimal break-away and dynamic friction and no stick-slip tendency ensures uniform motion even at low speeds.
- No stick-slip tendency in case of low sliding speeds.
- Low break-away and dynamic friction, even after prolonged standstill under high pressure.
- Constantly low dynamic friction throughout the part's service life.
- Insensitive to pressure peaks.
- Improved lubrication due to pressure medium deposit in the dynamic contact area.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to ISO 5597.
- Short axial assembly length.
- Installation in closed and undercut housings.
- Additional sizes of machined products available on short notice.

Range of application

Mainly for applications with increased requirements regarding friction and sliding behaviour in mobile and stationary hydraulics. The dimensions mainly conform to the requirements of ISO 5597 for housing and diameters respectively.

| | |
|-----------------------|--|
| Operating pressure | ≤ 250 bar |
| Operating temperature | -35 °C to +110 °C |
| Sliding speed | ≤ 1 m/s |
| Media | Hydraulic oils based on mineral oil and PAO fluids |


Compounds

The Ultrathan® P6030 compound is a Parker material based on polyurethane with a hardness of approx. 93 Shore A. Its main advantages in comparison with other polyurethane materials currently available on the market are its excellent wear resistance, low compression set and improved temperature resistance.

Installation

The seals should have an axial clearance (see columns H and L). To avoid damage at the sealing lips, the seals should not be pulled over sharp edges during installation. Normally these seals may be snapped into closed grooves. Where access is restricted special assembly tools may be required. Proposals for the design of such tools will be provided on request. For gap sizes see chapter „Maximum Gap Allowance“.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

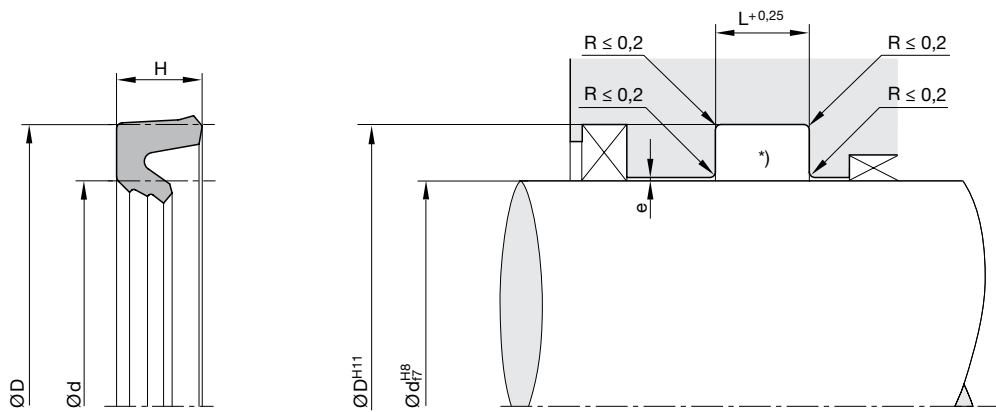

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | Order code |
|----|------|-----|-----|---------------|
| 20 | 28 | 4.5 | 5 | HL 2028 P6030 |
| 22 | 30 | 4.5 | 5 | HL 2230 P6030 |
| 25 | 33 | 4.5 | 5 | HL 2533 P6030 |
| 30 | 40 | 5.7 | 6.3 | HL 3040 P6030 |
| 32 | 42 | 5.7 | 6.3 | HL 3242 P6030 |
| 35 | 45 | 5.7 | 6.3 | HL 3545 P6030 |
| 36 | 46 | 5.7 | 6.3 | HL 3646 P5009 |
| 36 | 46 | 5.7 | 6.3 | HL 3646 P5011 |
| 37 | 47 | 5.7 | 6.3 | HL 3747 P6030 |
| 40 | 50 | 5.7 | 6.3 | HL 4050 P6030 |
| 45 | 55 | 5.7 | 6.3 | HL 4555 P6030 |
| 50 | 60 | 5.7 | 6.3 | HL 5060 P6030 |
| 56 | 66 | 6.5 | 7 | HL 5666 P6030 |
| 63 | 72.6 | 5.5 | 6.3 | HL 6372 P6030 |
| 65 | 75 | 7 | 7.5 | HL 6575 P6030 |

Further sizes on request.



The R3 rod seal is a compact seal with a secondary sealing lip and an anti-extrusion ring. This combination is characterized by smooth running properties, excellent sealing performance and high wear resistance even in harsh operating conditions. Due to their radial preloading, the sealing lips reliably wipe off the liquid film even in low-pressure conditions or non-pressurized movement of the rod.

As an FKM version the R3 rod seal can be used as a high-temperature variant for TPU rod seals.

- Enhanced sealing performance in non-pressurized conditions.
- Good wear resistance.
- Insensitive to pressure peaks.
- High temperature resistance in case of suitable compound selection.
- Improved lubrication due to pressure medium deposit in the dynamic contact area.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to ISO 5597.
- Installation in closed and undercut housings.

Range of application

Sealing of piston rods in hydraulic cylinders.

| | |
|-----------------------|-------------------|
| Operating pressure | ≤ 315 bar |
| Operating temperature | -30 °C to +100 °C |
| Sliding speed | ≤ 0.5 m/s |

Compounds

Rubber part:

Standard: N3544, NBR compound (≈ 88 Shore A).

For high temperatures: V3664, FKM compound (≈ 85 Shore A).


Glide ring: Polon® 062, modified PTFE + 60 % bronze.

Installation

This rod seal profile R3 is manufactured with a slightly oversized outer diameter, thus ensuring a tight fit in the groove. The preload at the inner diameter necessary for the functioning of the seal will only be generated after installation.

The working life of the seal is mainly influenced by the max. gap at the pressure-opposite of the sealing element.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

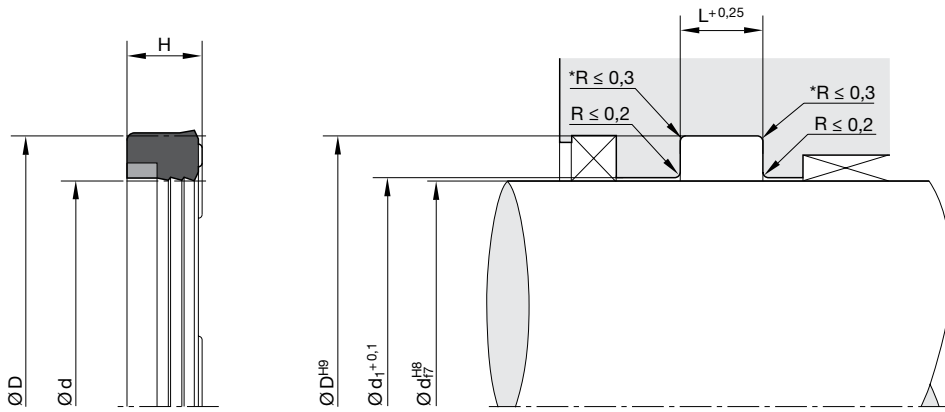

* In the case of designs according to ISO standard, the radii given there should be used.


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | d ₁ | ISO ¹⁾ | Order code | d | D | H | L | d ₁ | ISO ¹⁾ | Order code |
|----|----|-----|-----|----------------|-------------------|----------------|-----|-----|------|------|----------------|-------------------|---------------|
| 10 | 18 | 5.8 | 6.3 | 10.2 | · | R3 0010 00252 | 36 | 46 | 7.5 | 8 | 36.3 | · | R3 0044 00252 |
| 12 | 20 | 5.8 | 6.3 | 12.2 | · | R3 0012 00252 | 36 | 46 | 10 | 11 | 36.3 | · | R3 0045 00252 |
| 12 | 20 | 7 | 7.5 | 12.2 | · | R3 0013 00252 | 40 | 48 | 7.5 | 8 | 40.4 | · | R3 0540 00251 |
| 14 | 22 | 5.8 | 6.3 | 14.2 | · | R3 0015 00252 | 40 | 50 | 7.5 | 8 | 40.4 | · | R3 0040 00251 |
| 14 | 22 | 7 | 7.5 | 14.2 | · | R3 0009 00252 | 40 | 50 | 10 | 11 | 40.4 | · | R3 0050 00251 |
| 14 | 24 | 7.5 | 8 | 14.2 | · | R3 0016 00252 | 40 | 55 | 10 | 11 | 40.4 | · | R3 0006 00252 |
| 15 | 24 | 7 | 7.5 | 15.2 | · | R3 0008 00252 | 42 | 54 | 10 | 11 | 42.4 | · | R3 0037 00251 |
| 16 | 24 | 5.8 | 6.3 | 16.2 | · | R3 0017 00252 | 45 | 53 | 5.8 | 6.3 | 45.4 | · | R3 0076 00251 |
| 16 | 26 | 7.5 | 8 | 16.2 | · | R3 0018 00252 | 45 | 53 | 8 | 9 | 45.4 | · | R3 0073 00251 |
| 18 | 25 | 7 | 7.5 | 18.2 | · | R3 0019 00252 | 45 | 55 | 7.5 | 8 | 45.4 | · | R3 0053 00251 |
| 18 | 26 | 5.8 | 6.3 | 18.2 | · | R3 0020 00252 | 45 | 55 | 10 | 11 | 45.4 | · | R3 0054 00251 |
| 20 | 28 | 5.8 | 6.3 | 20.3 | · | R3 0022 00252 | 45 | 60 | 11 | 12.5 | 45.4 | · | R3 0055 00251 |
| 20 | 30 | 8 | 9 | 20.3 | · | R3 0024 00252 | 50 | 60 | 7.5 | 8 | 50.4 | · | R3 0056 00251 |
| 22 | 30 | 5.8 | 6.3 | 22.3 | · | R3 0025 00252 | 50 | 65 | 11.5 | 12.5 | 50.4 | · | R3 0058 00251 |
| 22 | 30 | 7 | 7.5 | 22.3 | · | R3 0026 00252 | 52 | 68 | 12 | 13 | 52.4 | · | R3 0052 00252 |
| 22 | 32 | 7.5 | 8 | 22.3 | · | R3 0028 00252 | 55 | 63 | 7 | 7.5 | 55.4 | · | R3 0064 00251 |
| 25 | 33 | 5.8 | 6.3 | 25.3 | · | R3 0029 00252 | 56 | 68 | 10 | 11 | 56.4 | · | R3 0077 00251 |
| 25 | 33 | 7 | 7.5 | 25.3 | · | R3 0030 00252* | 56 | 71 | 12 | 12.5 | 56.4 | · | R3 0059 00251 |
| 25 | 35 | 7.5 | 8 | 25.3 | · | R3 0031 00252 | 56 | 76 | 15 | 16 | 56.4 | · | R3 0060 00251 |
| 25 | 37 | 10 | 11 | 25.3 | · | R3 0032 00252 | 60 | 68 | 8 | 9 | 60.4 | · | R3 0066 00251 |
| 25 | 40 | 10 | 11 | 25.3 | · | R3 0531 00252 | 60 | 70 | 7.5 | 8 | 60.4 | · | R3 0067 00251 |
| 28 | 36 | 7 | 7.5 | 28.3 | · | R3 0034 00252 | 60 | 72 | 10 | 11 | 60.4 | · | R3 0061 00251 |
| 28 | 38 | 7.5 | 8 | 28.3 | · | R3 0035 00252 | 60 | 75 | 12 | 13 | 60.4 | · | R3 0065 00251 |
| 28 | 38 | 8 | 9 | 28.3 | · | R3 0036 00252 | 60 | 80 | 16 | 17 | 60.4 | · | R3 0071 00251 |
| 28 | 40 | 9 | 10 | 28.3 | · | R3 0027 00252 | 63 | 78 | 11.5 | 12.5 | 63.4 | · | R3 0062 00251 |
| 30 | 38 | 7 | 7.5 | 30.3 | · | R3 0033 00252 | 70 | 82 | 10 | 11 | 70.4 | · | R3 0068 00251 |
| 30 | 40 | 10 | 11 | 30.3 | · | R3 0004 00252 | 70 | 85 | 12 | 12.5 | 70.4 | · | R3 0069 00251 |
| 32 | 42 | 7.5 | 8 | 32.3 | · | R3 0038 00252 | 70 | 90 | 15 | 16 | 70.4 | · | R3 0070 00251 |
| 32 | 44 | 10 | 11 | 32.3 | · | R3 0039 00252 | 80 | 92 | 10 | 11 | 80.4 | · | R3 0079 00251 |
| 32 | 45 | 10 | 11 | 32.3 | · | R3 0049 00252 | 80 | 95 | 12 | 12.5 | 80.4 | · | R3 0080 00251 |
| 35 | 43 | 7 | 7.5 | 35.3 | · | R3 0535 00252 | 90 | 105 | 12 | 12.5 | 90.4 | · | R3 0090 00251 |
| 35 | 45 | 8.5 | 9.5 | 35.3 | · | R3 0050 00251 | 100 | 115 | 12 | 13 | 100.4 | · | R3 0100 00251 |
| 36 | 44 | 7 | 7.5 | 36.3 | · | R3 0042 00252 | 100 | 120 | 15 | 16 | 100.4 | · | R3 0101 00251 |
| 36 | 44 | 8 | 9 | 36.3 | · | R3 0043 00252 | 100 | 125 | 19 | 20 | 100.4 | · | R3 0102 00251 |

1) ISO 5597

* Moulds not available on the date of printing.

Further sizes on request.

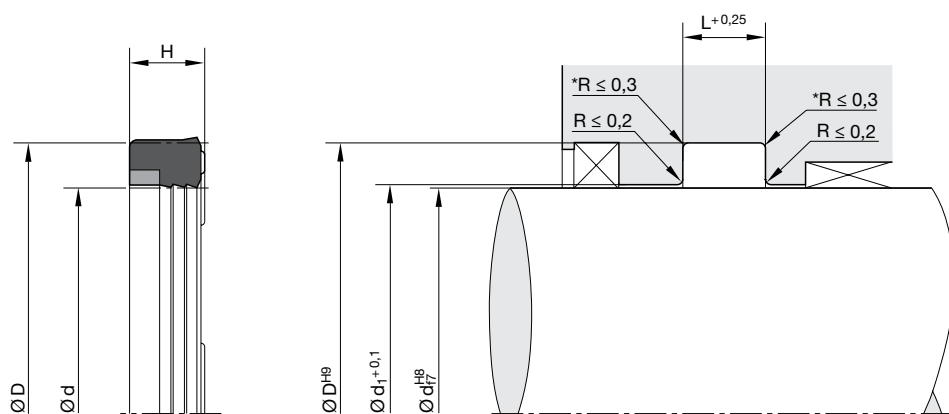

* In the case of designs according to ISO standard, the radii given there should be used.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | d ₁ | ISO ¹⁾ | Order code |
|-----|-----|----|----|----------------|-------------------|---------------|
| 110 | 130 | 15 | 16 | 110.4 | · | R3 0110 00251 |
| 125 | 145 | 15 | 16 | 125.4 | · | R3 0125 00251 |
| 130 | 150 | 15 | 16 | 130.4 | · | R3 0130 00251 |
| 140 | 160 | 15 | 16 | 140.4 | · | R3 0140 00251 |
| 180 | 205 | 19 | 20 | 180.4 | · | R3 0180 00251 |
| 200 | 225 | 19 | 20 | 200.4 | · | R3 0200 00251 |
| 280 | 310 | 23 | 25 | 280.4 | · | R3 0280 00251 |
| 320 | 360 | 30 | 32 | 320.4 | · | R3 0320 00252 |
| 360 | 400 | 30 | 32 | 360.4 | · | R3 0360 00252 |

1) ISO 5597

* Moulds not available on the date of printing.

Further sizes on request.



The B3 Ultrathan® rod seal is a U-ring with interference fit on the outer diameter. It is extremely wear-resistant, ensures reliable load holding performance and is suitable for high-pressure applications in hydraulics.

- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Easier installation.
- Insensitive to pressure peaks.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to ISO 5597.
- Installation in closed and undercut housings.
- Low compression set.
- Additional sizes of machined products available on short notice.

Range of application

Mainly for sealing piston rods and plungers in heavy-duty mobile and stationary hydraulics applications. The range of dimensions is primarily oriented to the requirements of ISO 5597 and ISO 3320 for housings and diameters.

| | |
|-----------------------|-------------------------------------|
| Operating pressure | ≤ 400 bar |
| Operating temperature | -35 °C to +110 °C |
| Sliding speed | ≤ 0.5 m/s |
| Media | Hydraulic oils based on mineral oil |

Compounds


The Ultrathan® P5008 compound is a Parker material based on polyurethane with a hardness of approx. 93 Shore A. Its main advantages in comparison with other polyurethane materials currently available on the market are the increased heat resistance and the lower compression set.

For media containing water, we recommend our hydrolysis resistant polyurethane compound P5001.

Installation

The seals should have an axial clearance (see columns H and L). To avoid damage at the sealing lips, the seals should not be pulled over sharp edges during installation. Normally these seals may be snapped into closed grooves. Where access is restricted special assembly tools may be required. Proposals for the design of such tools will be provided on request. For gap sizes see chapter "Maximum Gap Allowance".

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

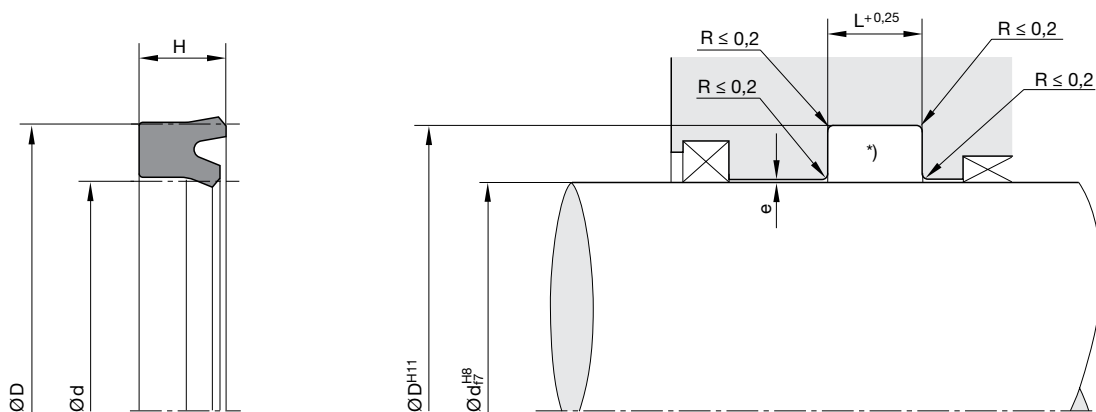

* In the case of designs according to ISO standard, the radii given there should be used.
„e“ see chapter „Maximum gap allowance“.


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | ISO ¹⁾ | ISO ²⁾ | Order code | d | D | H | L | ISO ¹⁾ | ISO ²⁾ | Order code |
|-------|------|------|------|-------------------|-------------------|---------------|------|------|------|------|-------------------|-------------------|---------------|
| 4 | 12 | 6 | 7 | | | B3 0412 P5008 | 22 | 30 | 5.7 | 6.3 | | | B3 2230 P5008 |
| 6 | 13 | 5 | 5.6 | | | B3 0613 P5008 | 22 | 32 | 7.3 | 8 | | | B3 2232 P5008 |
| 6 | 14 | 5.7 | 6.3 | | | B3 0614 P5008 | 25 | 32 | 6 | 7 | | | B3 2525 P5008 |
| 8 | 14 | 5 | 5.6 | | | B3 0814 P5008 | 25 | 33 | 5.7 | 6.3 | | | B3 2532 P5008 |
| 8 | 16 | 5.7 | 6.3 | | | B3 0816 P5008 | 25 | 33 | 6.5 | 7.3 | | | B3 2533 P5008 |
| 9 | 14.5 | 5 | 5.6 | | | B3 0914 P5008 | 25 | 33 | 8 | 9 | | | B3 2534 P5008 |
| 9 | 16 | 5.7 | 6.3 | | | B3 0916 P5008 | 25 | 35 | 7.3 | 8 | | | B3 2535 P5008 |
| 10 | 14 | 3.7 | 4.2 | | | B3 1015 P5008 | 25 | 40 | 10 | 11 | | | B3 2537 P5008 |
| 10 | 16 | 4.5 | 5.2 | | | B3 1016 P5008 | 25 | 40 | 11 | 12 | | | B3 2539 P5008 |
| 10 | 17 | 5.7 | 6.3 | | | B3 1017 P5008 | 28 | 36 | 5.7 | 6.3 | | | B3 2836 P5008 |
| 10 | 18 | 5.7 | 6.3 | | | B3 1018 P5008 | 28 | 36 | 8 | 9 | | | B3 2837 P5008 |
| 12 | 19 | 5 | 5.6 | | | B3 1211 P5008 | 28 | 38 | 7.3 | 8 | | | B3 2038 P5008 |
| 12 | 20 | 5.7 | 6.3 | | | B3 1212 P5008 | 28 | 38 | 10 | 11 | | | B3 2838 P5008 |
| 12 | 22 | 7.3 | 8 | | | B3 1222 P5008 | 28 | 43 | 11.4 | 12.5 | | | B3 2843 P5008 |
| 14 | 21 | 5 | 5.6 | | | B3 1421 P5008 | 30 | 38 | 5.7 | 6.3 | | | B3 3003 P5008 |
| 14 | 22 | 7.3 | 8 | | | B3 1422 P5008 | 30 | 38 | 8 | 9 | | | B3 3002 P5008 |
| 14 | 24 | 7.3 | 8 | | | B3 1424 P5008 | 30 | 40 | 7.3 | 8 | | | B3 3040 P5008 |
| 14.28 | 20.7 | 3.5 | 3.9 | | | B3 1428 P5008 | 30 | 40 | 10 | 11 | | | B3 3005 P5008 |
| 15 | 25 | 6 | 6.7 | | | B3 1515 P5008 | 30 | 45 | 10 | 11 | | | B3 3015 P5008 |
| 15 | 25 | 8 | 9 | | | B3 1525 P5008 | 32 | 40 | 6 | 7 | | | B3 3206 P5008 |
| 16 | 22 | 5 | 5.6 | | | B3 1620 P5008 | 32 | 40 | 6.7 | 7.5 | | | B3 3240 P5008 |
| 16 | 24 | 5.7 | 6.3 | | | B3 1624 P5008 | 32 | 42 | 7.3 | 8 | | | B3 3242 P5008 |
| 16 | 26 | 7.3 | 8 | | | B3 1626 P5008 | 32 | 42 | 10 | 11 | | | B3 3243 P5008 |
| 18 | 24 | 5 | 5.6 | | | B3 1824 P5008 | 32 | 45 | 10 | 11 | | | B3 3245 P5008 |
| 18 | 25 | 5 | 5.6 | | | B3 1826 P5008 | 32 | 47 | 10 | 11 | | | B3 3020 P5008 |
| 18 | 26 | 5.7 | 6.3 | | | B3 1825 P5008 | 34.9 | 47.6 | 9.9 | 11 | | | B3 3490 P5008 |
| 18 | 28 | 7.3 | 8 | | | B3 1827 P5008 | 35 | 43 | 6 | 6.7 | | | B3 3506 P5008 |
| 18 | 28 | 8 | 9 | | | B3 1828 P5008 | 35 | 45 | 7 | 8 | | | B3 3544 P5008 |
| 19.05 | 25.4 | 6.35 | 7.14 | | | B3 1905 P5008 | 35 | 45 | 10 | 11 | | | B3 3545 P5008 |
| 20 | 26 | 5 | 5.6 | | | B3 2026 P5008 | 36 | 44 | 5.7 | 6.3 | | | B3 3644 P5008 |
| 20 | 28 | 5.7 | 6.3 | | | B3 2028 P5008 | 36 | 46 | 7.3 | 8 | | | B3 3646 P5008 |
| 20 | 30 | 7.3 | 8 | | | B3 2030 P5008 | 38 | 50 | 10 | 11 | | | B3 3800 P5008 |
| 22 | 28 | 5 | 5.6 | | | B3 2225 P5008 | 38.1 | 50.8 | 9.53 | 10.3 | | | B3 3801 P5008 |
| 22 | 29 | 5 | 5.6 | | | B3 2229 P5008 | 40 | 48 | 5.7 | 6.3 | | | B3 4002 P5008 |

1) For housings according to ISO 5597 for ISO 6020-2 cylinders.

2) Standard sizes for housings according to ISO 5597.

Further sizes on request.

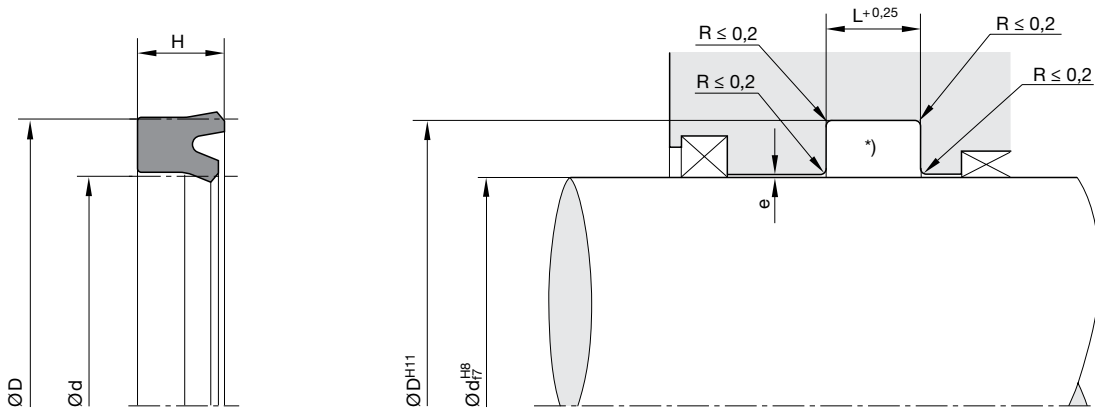

* In the case of designs according to ISO standard, the radii given there should be used.
„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.


| d | D | H | L | ISO ¹⁾ | ISO ²⁾ | Order code |
|-------|-------|------|------|-------------------|-------------------|---------------|
| 40 | 48 | 8 | 9 | | | B3 4003 P5008 |
| 40 | 50 | 7.3 | 8 | | | B3 4004 P5008 |
| 40 | 50 | 8 | 9 | | | B3 4006 P5008 |
| 40 | 50 | 10 | 11 | | | B3 4005 P5008 |
| 41.22 | 50.8 | 8.3 | 9.1 | | | B3 4022 P5008 |
| 42 | 52 | 7.3 | 8 | | | B3 5242 P5008 |
| 42.25 | 52 | 9.5 | 10.5 | | | B3 4043 P5008 |
| 45 | 53 | 5.6 | 6.3 | | | B3 4050 P5008 |
| 45 | 53 | 8 | 9 | | | B3 4502 P5008 |
| 45 | 53 | 10 | 11 | | | B3 4553 P5008 |
| 45 | 55 | 5.8 | 6.5 | | | B3 4554 P5008 |
| 45 | 55 | 7.3 | 8 | | | B3 4555 P5008 |
| 45 | 55 | 10 | 11 | | | B3 4556 P5008 |
| 45 | 57 | 9 | 10 | | | B3 4557 P5008 |
| 45 | 60 | 11.4 | 12.5 | | | B3 4560 P5008 |
| 50 | 58 | 8 | 9 | | | B3 5002 P5008 |
| 50 | 60 | 7.3 | 8 | | | B3 5004 P5008 |
| 50 | 60 | 10 | 11 | | | B3 5006 P5008 |
| 50 | 63 | 10 | 11 | | | B3 050L P5008 |
| 50 | 65 | 11.4 | 12.5 | | | B3 5065 P5008 |
| 50 | 70 | 14 | 15.5 | | | B3 5067 P5008 |
| 50.8 | 63.5 | 9.5 | 10.3 | | | B3 5008 P5008 |
| 55 | 63 | 8 | 9 | | | B3 5555 P5008 |
| 55 | 65 | 7.3 | 8 | | | B3 5563 P5008 |
| 55 | 65 | 10 | 11 | | | B3 5565 P5008 |
| 55 | 65 | 12 | 13 | | | B3 5570 P5008 |
| 55 | 70 | 10 | 11 | | | B3 5070 P5008 |
| 56 | 66 | 6.5 | 7.5 | | | B3 5666 P5008 |
| 56 | 71 | 8.6 | 9.5 | | | B3 5668 P5008 |
| 56 | 71 | 11.4 | 12.5 | | | B3 5671 P5008 |
| 57.15 | 69.85 | 9.53 | 10.3 | | | B3 5077 P5008 |
| 58 | 68 | 7.3 | 8 | | | B3 5868 P5008 |
| 60 | 68 | 8 | 9 | | | B3 6068 P5008 |
| 60 | 70 | 10 | 11 | | | B3 6070 P5008 |

| d | D | H | L | ISO ¹⁾ | ISO ²⁾ | Order code |
|-------|-------|------|------|-------------------|-------------------|---------------|
| 60 | 75 | 10 | 11 | | | B3 6074 P5008 |
| 60.33 | 73.03 | 9.53 | 10.3 | | | B3 6033 P5008 |
| 63 | 73 | 6.5 | 7.3 | | | B3 6372 P5008 |
| 63 | 73 | 12 | 13 | | | B3 6373 P5008 |
| 63 | 75 | 10 | 11 | | | B3 6375 P5008 |
| 63 | 78 | 10 | 11 | | | B3 6377 P5008 |
| 63 | 78 | 11.4 | 12.5 | | | B3 6378 P5008 |
| 63.5 | 76.2 | 9.53 | 10.3 | | | B3 6064 P5008 |
| 65 | 73 | 8 | 9 | | | B3 6502 P5008 |
| 65 | 75 | 7 | 8 | | | B3 6076 P5008 |
| 65 | 75 | 12 | 13 | | | B3 6075 P5008 |
| 65 | 78 | 10 | 11 | | | B3 065C P5008 |
| 65 | 80 | 12 | 13 | | | B3 6504 P5008 |
| 69.8 | 82.6 | 9.75 | 10.5 | | | B3 6980 P5008 |
| 70 | 78 | 8 | 9 | | | B3 7070 P5008 |
| 70 | 80 | 6.5 | 7.5 | | | B3 7079 P5008 |
| 70 | 80 | 7 | 7.8 | | | B3 7078 P5008 |
| 70 | 80 | 12 | 13 | | | B3 7080 P5008 |
| 70 | 82 | 8.7 | 9.7 | | | B3 7082 P5008 |
| 70 | 85 | 11.4 | 12.5 | | | B3 7085 P5008 |
| 75 | 85 | 7 | 8 | | | B3 7585 P5008 |
| 75 | 85 | 12 | 13 | | | B3 7586 P5008 |
| 75 | 88 | 10 | 11 | | | B3 7588 P5008 |
| 75 | 90 | 10 | 11 | | | B3 7590 P5008 |
| 75 | 90 | 12 | 13 | | | B3 7591 P5008 |
| 76 | 88 | 6 | 7 | | | B3 076A P5008 |
| 76.2 | 88.9 | 9.53 | 10.3 | | | B3 7620 P5008 |
| 78 | 86 | 8.5 | 9.5 | | | B3 7800 P5008 |
| 80 | 90 | 7 | 8 | | | B3 8088 P5008 |
| 80 | 90 | 10 | 11 | | | B3 8089 P5008 |
| 80 | 90 | 12 | 13 | | | B3 8090 P5008 |
| 80 | 95 | 10 | 11 | | | B3 8093 P5008 |
| 80 | 95 | 11.4 | 12.5 | | | B3 8094 P5008 |
| 80 | 100 | 12 | 13 | | | B3 8099 P5008 |

1) For housings according to ISO 5597 for ISO 6020-2 cylinders.

2) Standard sizes for housings according to ISO 5597.

Further sizes on request.

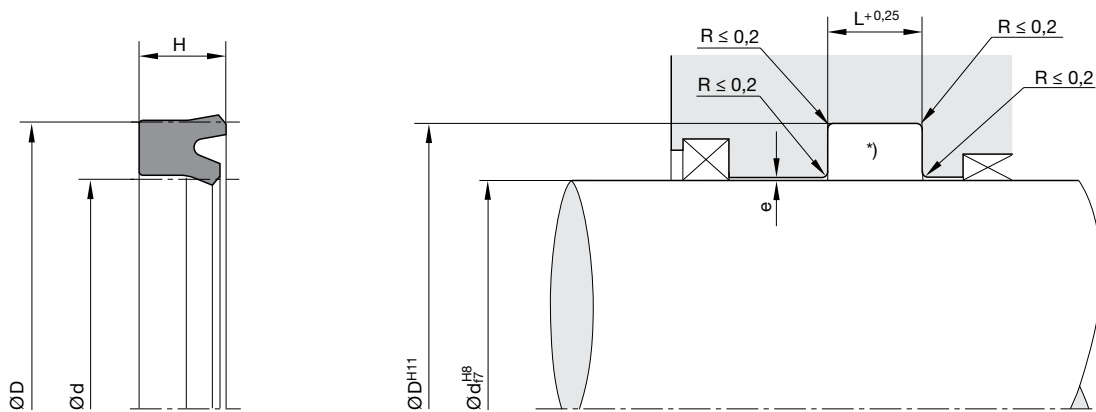

* In the case of designs according to ISO standard, the radii given there should be used.
„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | ISO ¹⁾ | ISO ²⁾ | Order code | d | D | H | L | ISO ¹⁾ | ISO ²⁾ | Order code |
|-------|--------|------|------|-------------------|-------------------|---------------|-------|--------|------|-------|-------------------|-------------------|---------------|
| 80 | 105 | 12 | 13 | | | B3 085C P5008 | 130 | 150 | 15 | 16 | | | B3 D050 P5008 |
| 85 | 100 | 9 | 10 | | | B3 8509 P5008 | 139.7 | 155.58 | 9.53 | 10.3 | | | B3 D097 P5008 |
| 85 | 100 | 12 | 13 | | | B3 8510 P5008 | 140 | 150 | 6 | 7 | | | B3 140E P5008 |
| 85 | 105 | 12 | 13 | | | B3 8505 P5008 | 140 | 155 | 9.6 | 10.6 | | | B3 E055 P5008 |
| 88.9 | 101.6 | 9.53 | 10.3 | | | B3 8889 P5008 | 140 | 160 | 14.5 | 16 | | | B3 E060 P5008 |
| 90 | 100 | 6.5 | 7.5 | | | B3 9001 P5008 | 145 | 165 | 14.5 | 16 | | | B3 E065 P5008 |
| 90 | 102 | 9 | 10 | | | B3 9002 P5008 | 150 | 170 | 15 | 16 | | | B3 F070 P5008 |
| 90 | 105 | 9 | 10 | | | B3 9004 P5008 | 152.4 | 171.45 | 12.7 | 13.49 | | | B3 F072 P5008 |
| 90 | 105 | 11.4 | 12.5 | | | B3 9005 P5008 | 160 | 180 | 15 | 16 | | | B3 G080 P5008 |
| 90 | 110 | 12 | 13 | | | B3 9009 P5008 | 160 | 185 | 18.2 | 20 | | | B3 G085 P5008 |
| 90 | 110 | 14.5 | 16 | | | B3 9010 P5008 | 170 | 200 | 18.2 | 20 | | | B3 H020 P5008 |
| 92 | 105 | 9.5 | 10.6 | | | B3 9210 P5008 | 180 | 200 | 15 | 16 | | | B3 J020 P5008 |
| 95 | 110 | 9 | 10 | | | B3 9505 P5008 | 180 | 205 | 18.2 | 20 | | | B3 J005 P5008 |
| 95 | 110 | 10 | 11 | | | B3 095B P5008 | 190 | 210 | 15 | 16 | | | B3 K005 P5008 |
| 95 | 115 | 12 | 13 | | | B3 095C P5008 | 200 | 220 | 12 | 13 | | | B3 200A P5008 |
| 100 | 115 | 9 | 10 | | | B3 A015 P5008 | 200 | 225 | 18.2 | 20 | | | B3 L025 P5008 |
| 100 | 120 | 11.5 | 12.5 | | | B3 A018 P5008 | 200 | 230 | 18 | 19 | | | B3 L030 P5008 |
| 100 | 120 | 14.5 | 16 | | | B3 A020 P5008 | 210 | 230 | 15 | 16 | | | B3 L110 P5008 |
| 101.6 | 117.48 | 9.53 | 10.3 | | | B3 A060 P5008 | 220 | 250 | 22.7 | 25 | | | B3 M050 P5008 |
| 105 | 120 | 10 | 11 | | | B3 A503 P5008 | 225 | 250 | 18 | 19 | | | B3 M070 P5008 |
| 105 | 120 | 11.4 | 12.5 | | | B3 A511 P5008 | 250 | 280 | 22.7 | 25 | | | B3 N580 P5008 |
| 105 | 125 | 14.5 | 16 | | | B3 A505 P5008 | 280 | 300 | 15 | 16 | | | B3 P005 P5008 |
| 110 | 125 | 9 | 10 | | | B3 B024 P5008 | 280 | 310 | 22.7 | 25 | | | B3 P010 P5008 |
| 110 | 125 | 9.6 | 10.6 | | | B3 B025 P5008 | 390 | 420 | 22.7 | 25 | | | B3 Q420 P5008 |
| 110 | 130 | 12 | 13 | | | B3 B029 P5008 | | | | | | | |
| 110 | 130 | 14.5 | 16 | | | B3 B030 P5008 | | | | | | | |
| 114.3 | 130.18 | 9.53 | 10.3 | | | B3 B044 P5008 | | | | | | | |
| 115 | 135 | 11.5 | 12.5 | | | B3 B052 P5008 | | | | | | | |
| 120 | 135 | 14.5 | 16 | | | B3 C017 P5008 | | | | | | | |
| 120 | 140 | 15 | 16 | | | B3 C040 P5008 | | | | | | | |
| 125 | 145 | 12 | 13 | | | B3 C244 P5008 | | | | | | | |
| 125 | 145 | 14.5 | 16 | | | B3 C245 P5008 | | | | | | | |
| 125.1 | 140.5 | 9.8 | 10.9 | | | B3 C224 P5008 | | | | | | | |
| 130 | 150 | 12 | 13 | | | B3 D049 P5008 | | | | | | | |

1) For housings according to ISO 5597 for ISO 6020-2 cylinders.

2) Standard sizes for housings according to ISO 5597.

Further sizes on request.



The BS Ultrathan® rod seal is a U-ring with interference fit on the outer diameter and a secondary sealing lip. It is extremely wear-resistant, ensures reliable load holding performance and is suitable for high-pressure hydraulic applications. The additional lip results in a larger deposit of lubrication film underneath the seal. This largely prevents dry running and higher wear, and achieves longer service life. Due to its radial preloading, the secondary sealing lip reliably wipes off the liquid film even in low pressure conditions or non-pressurized movement of the rod. For telescopic cylinders, we recommend the version with a 4-mm profile width.

- Excellent sealing performance due to elongated contact area and multiple sealing lips.
- Exceptionally high static and dynamic sealing performance.
- Enhanced sealing performance in non-pressurized conditions.
- Penetration of air into the system is largely prevented.
- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Easier installation.
- Insensitive to pressure peaks.
- Improved lubrication due to pressure medium deposit in the dynamic contact area.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to ISO 5597.
- Short radial assembly depth.
- Installation in closed and undercut housings.
- Additional sizes of machined products available on short notice.

Range of application

Mainly for sealing piston rods and plungers in heavy-duty applications in mobile and stationary hydraulics. The range of dimensions is primarily oriented to the requirements of ISO 5597 and ISO 3320 for housings and diameters.

| | |
|-----------------------|-------------------------------------|
| Operating pressure | ≤ 400 bar |
| Operating temperature | -35 °C to +110 °C |
| Sliding speed | ≤ 0.5 m/s |
| Media | Hydraulic oils based on mineral oil |

Compounds


The compound Ultrathan® P5008 is a Parker material based on polyurethane with a hardness of approx. 93 Shore A. Its main advantages in comparison with other polyurethane materials currently available on the market are the increased heat resistance and the lower compression set.

For media containing water, we recommend our hydrolysis-resistant polyurethane compound P5001.

Installation

The seals should have an axial clearance (see columns H and L). To avoid damage at the sealing lips, the seals should not be pulled over sharp edges during installation. Normally these seals may be snapped into closed grooves. Where access is restricted special assembly tools may be required. Proposals for the design of such tools will be provided on request. For gap sizes see chapter "Maximum Gap Allowance".

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

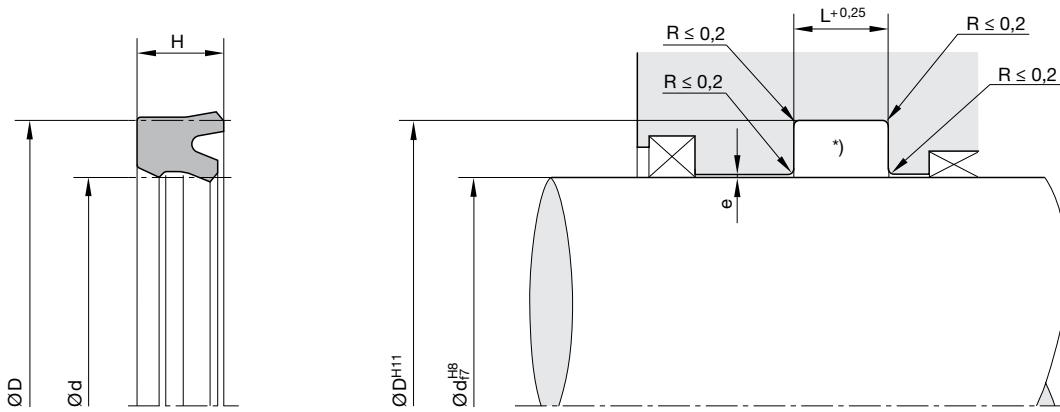

* In the case of designs according to ISO standard, the radii given there should be used.
„e“ see chapter „Maximum gap allowance“.


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | ISO ¹⁾ | ISO ²⁾ | Order code | d | D | H | L | ISO ¹⁾ | ISO ²⁾ | Order code |
|------|-------|------|------|-------------------|-------------------|---------------|------|------|------|------|-------------------|-------------------|---------------|
| 8 | 16 | 5.7 | 6.3 | | · | BS 0816 P5008 | 45 | 53 | 5.6 | 6.3 | · | · | BS 4553 P5008 |
| 9 | 16 | 5.7 | 6.3 | | | BS 0916 P5008 | 45 | 55 | 7.3 | 8 | | · | BS 4555 P5008 |
| 10 | 16 | 4.5 | 5.3 | | | BS 1016 P5008 | 45 | 55 | 10 | 11 | | | BS 4556 P5008 |
| 10 | 17 | 5.7 | 6.3 | | | BS 1017 P5008 | 45 | 57.7 | 9.6 | 10.5 | | | BS 4557 P5008 |
| 10 | 18 | 5.7 | 6.3 | | · | BS 1018 P5008 | 45 | 60 | 10.5 | 11.5 | | | BS 4562 P5008 |
| 12.7 | 19.05 | 4.5 | 5.3 | | | BS 1270 P5008 | 45 | 60 | 11.4 | 12.5 | | · | BS 4561 P5008 |
| 14 | 20 | 5.7 | 6.3 | | | BS 1420 P5008 | 46 | 56 | 10 | 11 | | | BS 4605 P5008 |
| 14 | 22 | 5.7 | 6.3 | | · | BS 1422 P5008 | 48 | 56 | 11.5 | 12.5 | | | BS 4856 P5008 |
| 16 | 24 | 5.8 | 6.3 | | · | BS 1624 P5008 | 50 | 60 | 7.3 | 8 | | · | BS 5004 P5008 |
| 16 | 26 | 7.3 | 8 | | · | BS 1626 P5008 | 50 | 60 | 10 | 11 | | | BS 5006 P5008 |
| 18 | 28 | 7.3 | 8 | | · | BS 1827 P5008 | 50 | 62.7 | 9.6 | 10.5 | | | BS 5062 P5008 |
| 20 | 30 | 7.3 | 8 | | · | BS 2030 P5008 | 50 | 65 | 10 | 11 | | | BS 5064 P5008 |
| 22 | 32 | 7.3 | 8 | | · | BS 2232 P5008 | 50 | 65 | 11.4 | 12.5 | | · | BS 5065 P5008 |
| 25 | 33 | 6.5 | 7.3 | | | BS 2533 P5008 | 50.8 | 63.5 | 9.5 | 10.3 | | | BS 5085 P5008 |
| 25 | 35 | 7.3 | 8 | | · | BS 2535 P5008 | 52 | 62 | 10 | 11 | | | BS 5203 P5008 |
| 26 | 36 | 10 | 11 | | | BS 2605 P5008 | 55 | 65 | 10 | 11 | | | BS 5564 P5008 |
| 28 | 36 | 7 | 7.5 | | | BS 2836 P5008 | 55 | 65 | 11 | 12 | | | BS 5565 P5008 |
| 28 | 38 | 7.3 | 8 | | · | BS 2838 P5008 | 55 | 67 | 10 | 11 | | | BS 5567 P5008 |
| 30 | 40 | 10 | 11 | | | BS 3005 P5008 | 56 | 71 | 11.4 | 12.5 | | · | BS 5609 P5008 |
| 30 | 45 | 10 | 11 | | | BS 3030 P5008 | 58 | 66 | 11.5 | 12.5 | | | BS 5866 P5008 |
| 32 | 42 | 7.3 | 8 | | · | BS 3242 P5008 | 60 | 68 | 13 | 14 | | | BS 6068 P5008 |
| 32 | 42 | 10 | 11 | | | BS 3243 P5008 | 60 | 70 | 7.5 | 8.5 | | | BS 6069 P5008 |
| 32 | 45 | 10 | 11 | | | BS 3245 P5008 | 60 | 70 | 10 | 11 | | | BS 6070 P5008 |
| 35 | 45 | 10 | 11 | | | BS 3545 P5008 | 60 | 75 | 10 | 11 | | | BS 6074 P5008 |
| 35 | 50 | 10 | 11 | | | BS 3550 P5008 | 63 | 71 | 8 | 9 | | | BS 6371 P5008 |
| 36 | 46 | 7.3 | 8 | | · | BS 3646 P5008 | 63 | 78 | 10 | 11 | | | BS 6377 P5008 |
| 36 | 48 | 10 | 11 | | | BS 3649 P5008 | 63 | 78 | 11.4 | 12.5 | | · | BS 6378 P5008 |
| 36 | 51 | 10 | 11 | | | BS 3651 P5008 | 65 | 73 | 11.5 | 12.5 | | | BS 6573 P5008 |
| 37 | 47 | 10 | 11 | | | BS 3747 P5008 | 65 | 75 | 12 | 13 | | | BS 6075 P5008 |
| 40 | 48 | 11.5 | 12.5 | | | BS 4004 P5008 | 65 | 85 | 11.4 | 12.5 | | | BS 6578 P5008 |
| 40 | 49.52 | 9.6 | 10.5 | | | BS 4049 P5008 | 68 | 78 | 12 | 13 | | | BS 6805 P5008 |
| 40 | 50 | 10 | 11 | | | BS 4005 P5008 | 70 | 80 | 12 | 13 | | | BS 7080 P5008 |
| 40 | 52 | 8 | 9 | | | BS 4008 P5008 | 70 | 85 | 10 | 11 | | | BS 7084 P5008 |
| 40 | 55 | 11.4 | 12.5 | | · | BS 4007 P5008 | 70 | 85 | 11.4 | 12.5 | | · | BS 7085 P5008 |

1) For housings according to ISO 5597 for ISO 6020-2 cylinders.

2) Standard sizes for housings according to ISO 5597.

Further sizes on request.

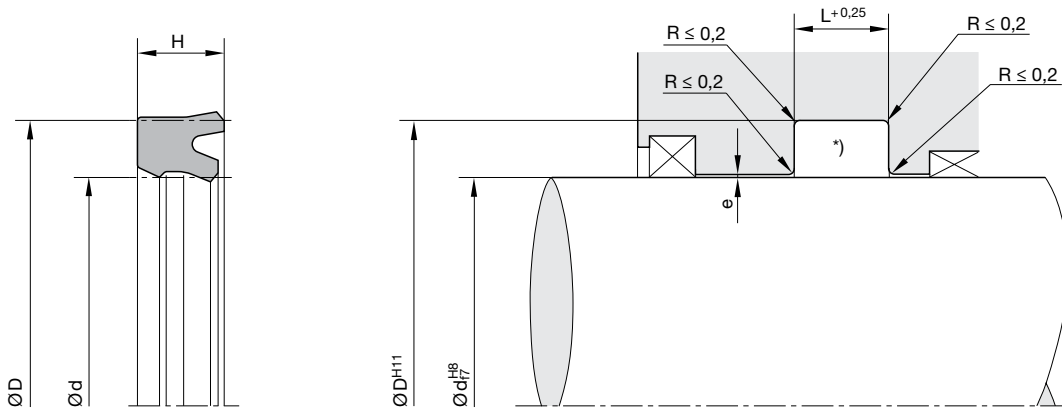

* In the case of designs according to ISO standard, the radii given there should be used.
„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | ISO ¹⁾ | ISO ²⁾ | Order code | d | D | H | L | ISO ¹⁾ | ISO ²⁾ | Order code |
|-------|-------|------|------|-------------------|-------------------|---------------|--------|--------|------|------|-------------------|-------------------|---------------|
| 74 | 82 | 11.5 | 12.5 | | | BS 7482 P5008 | 140 | 160 | 14.5 | 16 | | | BS E060 P5008 |
| 75 | 85 | 11.5 | 12.5 | | | BS 7585 P5008 | 143 | 151 | 13 | 14 | | | BS E305 P5008 |
| 75 | 88 | 10 | 11 | | | BS 7588 P5008 | 145 | 153 | 11.5 | 12.5 | | | BS E050 P5008 |
| 75 | 90 | 10 | 11 | | | BS 7590 P5008 | 150 | 170 | 15 | 16 | | | BS F070 P5008 |
| 77 | 87 | 11.5 | 12.5 | | | BS 7787 P5008 | 152 | 160 | 9.1 | 10 | | | BS F252 P5008 |
| 78 | 86 | 11.5 | 12.5 | | | BS 7804 P5008 | 152 | 164 | 9.1 | 10 | | | BS F264 P5008 |
| 80 | 88 | 11.5 | 12.5 | | | BS 8088 P5008 | 160 | 185 | 18.2 | 20 | | | BS G085 P5008 |
| 80 | 90 | 12 | 13 | | | BS 8090 P5008 | 167 | 175 | 11.5 | 12.5 | | | BS G704 P5008 |
| 80 | 95 | 11.4 | 12.5 | | | BS 8095 P5008 | 167 | 176 | 11.5 | 12.5 | | | BS G705 P5008 |
| 80 | 100 | 12 | 13 | | | BS 8099 P5008 | 170 | 200 | 18 | 19 | | | BS H020 P5008 |
| 81 | 89 | 11.5 | 12.5 | | | BS 8150 P5008 | 171 | 179 | 13 | 14 | | | BS H105 P5008 |
| 82.55 | 95.25 | 9.53 | 10.3 | | | BS 8255 P5008 | 176 | 186 | 12 | 13 | | | BS H160 P5008 |
| 85 | 93 | 11.5 | 12.5 | | | BS 8593 P5008 | 177.7 | 195 | 9.73 | 11.3 | | | BS H169 P5008 |
| 85 | 100 | 12 | 13 | | | BS 8510 P5008 | 180 | 188 | 9.1 | 10 | | | BS J080 P5008 |
| 90 | 98 | 11.5 | 12.5 | | | BS 9098 P5008 | 180 | 188 | 11.5 | 12.5 | | | BS J088 P5008 |
| 90 | 105 | 11.4 | 12.5 | | | BS 9005 P5008 | 180 | 192 | 9.1 | 10 | | | BS J092 P5008 |
| 92 | 107 | 11.4 | 12.5 | | | BS 9203 P5008 | 193 | 201 | 11.5 | 12.5 | | | BS K003 P5008 |
| 95 | 115 | 12 | 13 | | | BS 9515 P5008 | 200 | 225 | 18.2 | 20 | | | BS L025 P5008 |
| 97 | 105 | 13 | 14 | | | BS 9705 P5008 | 209.55 | 226.77 | 9.73 | 11.3 | | | BS L008 P5008 |
| 100 | 108 | 12 | 13 | | | BS A008 P5008 | 212 | 220 | 9.1 | 10 | | | BS L012 P5008 |
| 100 | 120 | 12 | 13 | | | BS A019 P5008 | 212 | 224 | 9.1 | 10 | | | BS L024 P5008 |
| 100 | 120 | 14.5 | 16 | | | BS A020 P5008 | 220 | 228 | 11.5 | 12.5 | | | BS M028 P5008 |
| 105 | 113 | 11.5 | 12.5 | | | BS A513 P5008 | 220 | 250 | 22.7 | 25 | | | BS M050 P5008 |
| 105 | 117 | 9.1 | 10 | | | BS A517 P5008 | 223 | 231 | 11.5 | 12.5 | | | BS M060 P5008 |
| 107 | 115 | 11.5 | 12.5 | | | BS A715 P5008 | 228.5 | 246 | 9 | 10 | | | BS M085 P5008 |
| 110 | 125 | 14.5 | 16 | | | BS B025 P5008 | 230 | 260 | 22.7 | 25 | | | BS M110 P5008 |
| 110 | 130 | 14.5 | 16 | | | BS B030 P5008 | 250 | 280 | 22.7 | 25 | | | BS N580 P5008 |
| 118 | 126 | 13 | 14 | | | BS B805 P5008 | 266.7 | 284 | 9.73 | 11.3 | | | BS O005 P5008 |
| 120 | 128 | 11.5 | 12.5 | | | BS C028 P5008 | 280 | 310 | 18 | 19 | | | BS P008 P5008 |
| 120 | 130 | 14 | 15 | | | BS C030 P5008 | | | | | | | |
| 125 | 133 | 11.5 | 12.5 | | | BS C233 P5008 | | | | | | | |
| 128 | 136 | 9.1 | 10 | | | BS C836 P5008 | | | | | | | |
| 128 | 140 | 9.1 | 10 | | | BS C840 P5008 | | | | | | | |
| 130 | 145 | 12 | 13 | | | BS D045 P5008 | | | | | | | |

1) For housings according to ISO 5597 for ISO 6020-2 cylinders.

2) Standard sizes for housings according to ISO 5597.

Further sizes on request.



The single-acting OD rod sealing set featuring a Slipper Seal® design consists of a PTFE rod seal and an elastomer O-ring as a preloading element. The asymmetric cross-section of the seal has been designed for optimum return of drag oil during the stroke in both directions. The optimum sealing effect is achieved by installation in a tandem arrangement in combination with a double wiper ring. The OD product series is particularly well suited for piston rods in control cylinders, servo-assisted systems, machine tools and quick-acting cylinders. The sealing set is successfully used in the automotive industry (e.g. in shock absorbers) and the process industry as well. Due to the material combination of the slide ring (PTFE) and the O-ring (elastomer), this product is suitable for a wide range of applications, especially for aggressive media and/or high temperatures. Several alternative compounds may be selected depending on the specific application profile.

- Good sealing performance in extremely small assembly conditions.
- Excellent wear resistance.
- Minimal break-away and dynamic friction and no stick-slip tendency ensures uniform motion even at low speeds.
- Good energy efficiency due to low friction.
- Insensitive to pressure peaks.
- High temperature resistance assured by suitable O-ring compound selection.
- High extrusion resistance.
- Adaptable to nearly all media thanks to high chemical resistance of the sealing ring and large O-ring compound selection.
- Dimensions according to ISO 7425-2.
- Also available as double-acting version.
- Short axial assembly length.
- Installation in closed and undercut housings.
- Available in diameters from 4 to 4500 mm.
- Additional sizes of machined products available on short notice.

Range of application

Rod sealing set for hydraulic cylinders.

| | |
|---|---------------------------------|
| Operating pressure | ≤ 400 bar |
| in case of reduced extrusion gap (H7/f7) and large cross sections | ≤ 600 bar |
| Operating temperature | -30 °C to +100 °C ¹⁾ |
| Sliding speed | ≤ 4 m/s |

¹⁾ With deviation from standard temperature range, please contact our consultancy service for adequate O-ring compound.


Compounds

Sealing ring: Polon® 052, modified PTFE + 40 % bronze.
O-ring: N0674, NBR elastomer with approx. 70 Shore A.

Installation

For diameters < 30 mm open grooves are required.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

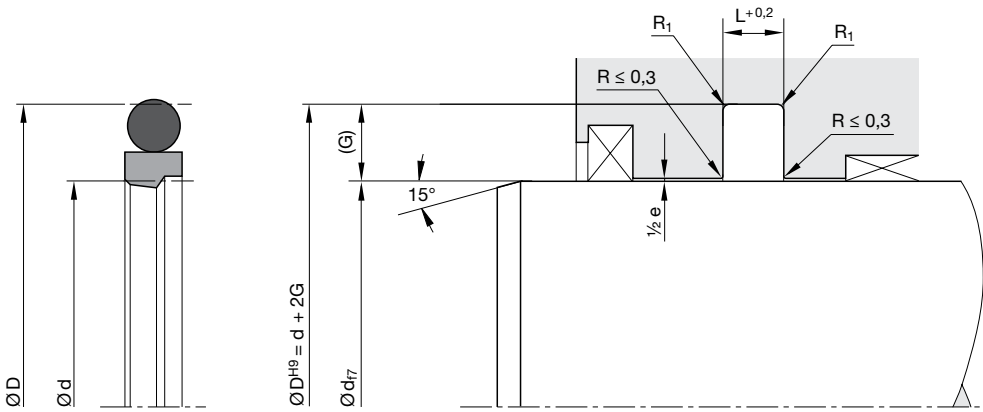


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Housing dimensions

| Series no. | Cross-section | O-ring cross-section (mm) | Recommended rod Ø range | | Groove width L (mm) | Groove depth G (mm) | Gap max. 0200 bar | | Gap max. 200400 bar | | Radius max. R ₁ (mm) | ISO ¹⁾ |
|------------|---------------|---------------------------|-------------------------|----------|---------------------|---------------------|-------------------|-----------|---------------------|---|---------------------------------|-------------------|
| | | | d (mm) ≥ | d (mm) < | | | e (mm) | e (mm) | | | | |
| 00170 | A | 1.78 | 4 | 8 | 2.2 | 2.45 | 0.6 - 0.4 | 0.4 - 0.2 | 0.5 | | | |
| 00170 | B | 2.62 | 8 | 19 | 3.2 | 3.65 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | ● | | |
| 00170 | C | 3.53 | 19 | 38 | 4.2 | 5.35 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | ● | | |
| 00170 | D | 5.33 | 38 | 200 | 6.3 | 7.55 | 1 - 0.6 | 0.6 - 0.4 | 0.9 | ● | | |
| 00170 | E | 6.99 | 200 | 256 | 8.1 | 10.25 | 1 - 0.6 | 0.6 - 0.4 | 0.9 | ● | | |
| 00170 | F | 6.99 | 256 | 650 | 8.1 | 12 | 1.2 - 0.7 | 0.7 - 0.5 | 0.9 | ● | | |
| 00170 | G | 8.4 | 650 | 1000 | 9.5 | 13.65 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | ● | | |
| 00170 | H | 12 | 1000 | - | 13.8 | 19 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | ● | | |
| 00170 | K | 1.78 | 4 | 8 | 2.2 | 2.5 | 0.6 - 0.4 | 0.4 - 0.2 | 0.5 | ● | | |
| 00170 | L | 2.62 | 8 | 19 | 3.2 | 3.75 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | ● | | |
| 00170 | M | 3.53 | 19 | 38 | 4.2 | 5.5 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | ● | | |
| 00170 | N | 5.33 | 38 | 200 | 6.3 | 7.75 | 1 - 0.6 | 0.6 - 0.4 | 0.9 | ● | | |
| 00170 | O | 6.99 | 200 | 256 | 8.1 | 10.5 | 1 - 0.6 | 0.6 - 0.4 | 0.9 | ● | | |
| 00170 | P | 6.99 | 256 | 650 | 8.1 | 12.25 | 1.2 - 0.7 | 0.7 - 0.5 | 0.9 | ● | | |

1) Housing dimensions according to ISO 7425-2

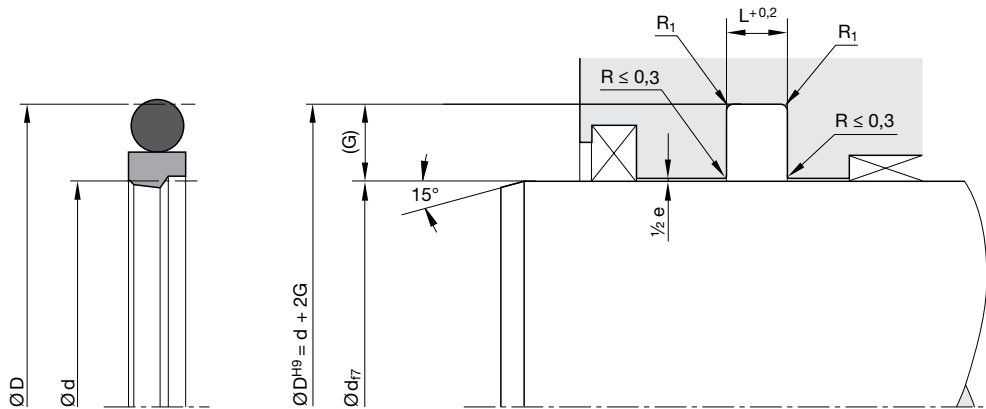

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example


Rod diameter 40 mm

OD 0400 052 00171 D (40,0 × 55,1 × 6,3)

| | | | | |
|-------|-----------------------------------|----------------|--------------------------|---------------|
| OD | Profile | | | |
| 0400 | Rod diameter × 10 | | | |
| 052 | Compound | | | |
| 00171 | Series no. / compound code O-ring | | | |
| | 00170 | without O-ring | | |
| | 00171 | N0674 (NBR) | 70 ^{±5} Shore A | -30 / +110 °C |
| | 00172 | V0747 (FKM) | 75 ^{±5} Shore A | -25 / +200 °C |
| | 00173 | N0756 (NBR) | 75 ^{±5} Shore A | -50 / +110 °C |
| | 00174 | E0540 (EPDM) | 80 ^{±5} Shore A | -40 / +150 °C |
| | 00175 | N3578 (NBR) | 75 ^{±5} Shore A | -30 / +110 °C |
| | 00176 | N0552 (NBR) | 90 ^{±5} Shore A | -30 / +100 °C |
| | 00177 | N1173 (HNBR) | 70 ^{±5} Shore A | -30 / +150 °C |
| D | Cross-section | | | |

Please note:

For certain applications, it might be convenient to use a non-standard cross-section reduced or heavier. In these cases, please replace the standard cross-section code (in above example: „D“) by the one you require (for example „C“ or „E“).

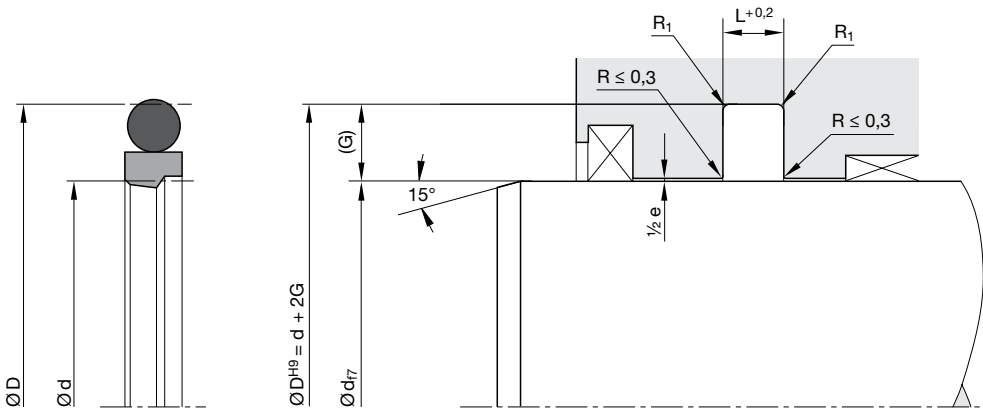


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Standard range

| Size | Groove | | | No. | O-ring | | ISO ¹⁾ | Size | Groove | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------|-------------|-----------|-------|------------|------------|-------------------|------|-------------|-------------|-----------|-------|------------|------------|-------------------|
| | Ø d (mm) | Ø D (mm) | L (mm) | | CS (mm) | ID (mm) | | | Ø d (mm) | Ø D (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 0040 | 4 | 8.90 | 2.20 | 2-010 | 1.78 | 6.07 | | 0320 | 32 | 42.70 | 4.20 | 2-221 | 3.53 | 36.09 | |
| 0050 | 5 | 9.90 | 2.20 | 2-010 | 1.78 | 6.07 | | 0320 | 32 | 43 | 4.20 | 2-221 | 3.53 | 36.09 | • |
| 0060 | 6 | 11 | 2.20 | 2-011 | 1.78 | 7.65 | • | 0350 | 35 | 45.70 | 4.20 | 2-222 | 3.53 | 37.69 | |
| 0070 | 7 | 11.90 | 2.20 | 2-012 | 1.78 | 9.25 | | 0360 | 36 | 47 | 4.20 | 2-223 | 3.53 | 40.87 | • |
| 0080 | 8 | 13 | 2.20 | 2-012 | 1.78 | 9.25 | • | 0380 | 38 | 53.10 | 6.30 | 2-327 | 5.33 | 43.82 | |
| 0080 | 8 | 15.30 | 3.20 | 2-111 | 2.62 | 10.77 | | 0400 | 40 | 51 | 4.20 | 2-224 | 3.53 | 44.04 | • |
| 0100 | 10 | 15 | 2.20 | 2-013 | 1.78 | 10.82 | • | 0400 | 40 | 55.10 | 6.30 | 2-328 | 5.33 | 46.99 | |
| 0100 | 10 | 17.30 | 3.20 | 2-112 | 2.62 | 12.37 | | 0420 | 42 | 57.10 | 6.30 | 2-328 | 5.33 | 46.99 | |
| 0120 | 12 | 17 | 2.20 | 2-015 | 1.78 | 14 | • | 0450 | 45 | 56 | 4.20 | 2-226 | 3.53 | 50.39 | • |
| 0120 | 12 | 19.30 | 3.20 | 2-114 | 2.62 | 15.54 | | 0450 | 45 | 60.10 | 6.30 | 2-329 | 5.33 | 50.17 | |
| 0120 | 12 | 19.50 | 3.20 | 2-114 | 2.62 | 15.54 | • | 0480 | 48 | 63.10 | 6.30 | 2-330 | 5.33 | 53.34 | |
| 0140 | 14 | 19 | 2.20 | 2-016 | 1.78 | 15.60 | • | 0500 | 50 | 61 | 4.20 | 2-227 | 3.53 | 53.57 | • |
| 0140 | 14 | 21.50 | 3.20 | 2-115 | 2.62 | 17.12 | • | 0500 | 50 | 65.10 | 6.30 | 2-331 | 5.33 | 56.52 | |
| 0150 | 15 | 22.30 | 3.20 | 2-116 | 2.62 | 18.72 | | 0520 | 52 | 67.10 | 6.30 | 2-331 | 5.33 | 56.52 | |
| 0160 | 16 | 23.50 | 3.20 | 2-116 | 2.62 | 18.72 | • | 0550 | 55 | 70.10 | 6.30 | 2-332 | 5.33 | 59.69 | |
| 0180 | 18 | 25.30 | 3.20 | 2-117 | 2.62 | 20.29 | | 0560 | 56 | 67 | 4.20 | 2-229 | 3.53 | 59.92 | • |
| 0180 | 18 | 25.50 | 3.20 | 2-117 | 2.62 | 20.29 | • | 0560 | 56 | 71.50 | 6.30 | 2-332 | 5.33 | 59.69 | • |
| 0200 | 20 | 27.50 | 3.20 | 2-118 | 2.62 | 21.89 | • | 0580 | 58 | 73.10 | 6.30 | 2-333 | 5.33 | 62.87 | |
| 0200 | 20 | 30.70 | 4.20 | 2-214 | 3.53 | 24.99 | | 0600 | 60 | 75.10 | 6.30 | 2-334 | 5.33 | 66.04 | |
| 0200 | 20 | 31 | 4.20 | 2-214 | 3.53 | 24.99 | • | 0630 | 63 | 74 | 4.20 | 2-231 | 3.53 | 66.27 | • |
| 0220 | 22 | 29.50 | 3.20 | 2-120 | 2.62 | 25.07 | • | 0630 | 63 | 78.50 | 6.30 | 2-335 | 5.33 | 69.22 | • |
| 0220 | 22 | 32.70 | 4.20 | 2-215 | 3.53 | 26.57 | | 0650 | 65 | 80.10 | 6.30 | 2-335 | 5.33 | 69.22 | |
| 0220 | 22 | 33 | 4.20 | 2-215 | 3.53 | 26.57 | • | 0700 | 70 | 85.10 | 6.30 | 2-337 | 5.33 | 75.57 | |
| 0250 | 25 | 32.50 | 3.20 | 2-122 | 2.62 | 26.24 | • | 0700 | 70 | 85.50 | 6.30 | 2-337 | 5.33 | 75.57 | • |
| 0250 | 25 | 35.70 | 4.20 | 2-217 | 3.53 | 29.32 | | 0750 | 75 | 90.10 | 6.30 | 2-339 | 5.33 | 81.92 | |
| 0250 | 25 | 36 | 4.20 | 2-217 | 3.53 | 29.32 | • | 0800 | 80 | 95.10 | 6.30 | 2-340 | 5.33 | 85.09 | |
| 0260 | 26 | 36.70 | 4.20 | 2-218 | 3.53 | 31.34 | | 0800 | 80 | 95.50 | 6.30 | 2-340 | 5.33 | 85.09 | • |
| 0280 | 28 | 38.70 | 4.20 | 2-219 | 3.53 | 32.92 | | 0850 | 85 | 100.10 | 6.30 | 2-342 | 5.33 | 91.44 | |
| 0280 | 28 | 39 | 4.20 | 2-219 | 3.53 | 32.92 | • | 0900 | 90 | 105.10 | 6.30 | 2-343 | 5.33 | 94.62 | |
| 0300 | 30 | 40.70 | 4.20 | 2-220 | 3.53 | 34.52 | | 0900 | 90 | 105.50 | 6.30 | 2-343 | 5.33 | 94.62 | • |


1) ISO 7425-2
Further sizes on request.

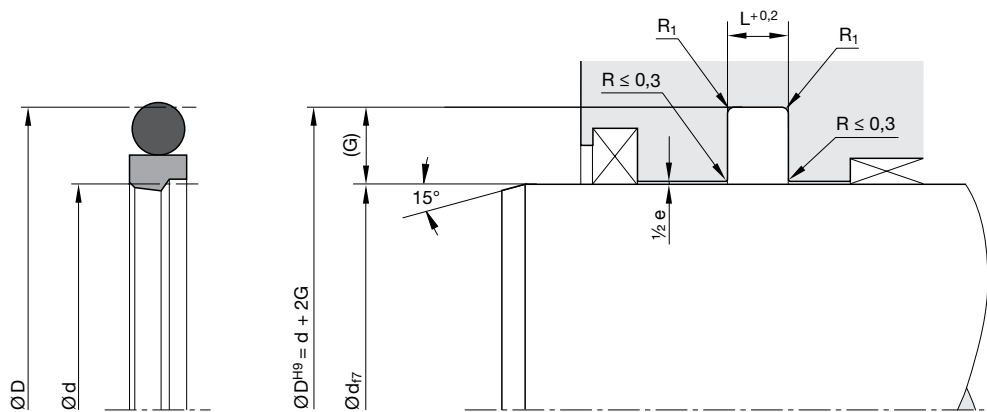

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| Size | Groove | | L (mm) | No. | O-ring | | ISO ¹⁾ | Size | Groove | | L (mm) | No. | O-ring | | ISO ¹⁾ |
|------|----------|----------|--------|-------|---------|---------|-------------------|------|----------|----------|--------|-------|---------|---------|-------------------|
| | Ø d (mm) | Ø D (mm) | | | CS (mm) | ID (mm) | | | Ø d (mm) | Ø D (mm) | | | CS (mm) | ID (mm) | |
| 0950 | 95 | 110.10 | 6.30 | 2-345 | 5.33 | 100.97 | | 2500 | 250 | 270.50 | 8.10 | 2-449 | 6.99 | 253.37 | |
| 1000 | 100 | 115.10 | 6.30 | 2-346 | 5.33 | 104.14 | | 2500 | 250 | 271 | 8.10 | 2-449 | 6.99 | 253.37 | • |
| 1000 | 100 | 115.50 | 6.30 | 2-346 | 5.33 | 104.14 | • | 2600 | 260 | 284 | 8.10 | 2-450 | 6.99 | 266.07 | |
| 1100 | 110 | 125.10 | 6.30 | 2-350 | 5.33 | 116.84 | | 2700 | 270 | 294 | 8.10 | 2-451 | 6.99 | 278.77 | |
| 1100 | 110 | 125.50 | 6.30 | 2-350 | 5.33 | 116.84 | • | 2800 | 280 | 304 | 8.10 | 2-452 | 6.99 | 291.47 | |
| 1200 | 120 | 135.10 | 6.30 | 2-353 | 5.33 | 126.37 | | 2800 | 280 | 304.50 | 8.10 | 2-452 | 6.99 | 291.47 | • |
| 1250 | 125 | 140.10 | 6.30 | 2-354 | 5.33 | 129.54 | | 2900 | 290 | 314 | 8.10 | 2-453 | 6.99 | 304.17 | |
| 1250 | 125 | 140.50 | 6.30 | 2-354 | 5.33 | 129.54 | • | 3000 | 300 | 324 | 8.10 | 2-453 | 6.99 | 304.17 | |
| 1300 | 130 | 145.10 | 6.30 | 2-356 | 5.33 | 135.89 | | 3100 | 310 | 334 | 8.10 | 2-454 | 6.99 | 316.87 | |
| 1400 | 140 | 155.10 | 6.30 | 2-359 | 5.33 | 145.42 | | 3200 | 320 | 344 | 8.10 | 2-455 | 6.99 | 329.57 | |
| 1400 | 140 | 155.50 | 6.30 | 2-359 | 5.33 | 145.42 | • | 3200 | 320 | 344.50 | 8.10 | 2-455 | 6.99 | 329.57 | • |
| 1500 | 150 | 165.10 | 6.30 | 2-361 | 5.33 | 151.77 | | 3300 | 330 | 354 | 8.10 | 2-456 | 6.99 | 342.27 | |
| 1600 | 160 | 175.10 | 6.30 | 2-363 | 5.33 | 164.47 | | 3400 | 340 | 364 | 8.10 | 2-457 | 6.99 | 354.97 | |
| 1600 | 160 | 175.50 | 6.30 | 2-363 | 5.33 | 164.47 | • | 3500 | 350 | 374 | 8.10 | 2-457 | 6.99 | 354.97 | |
| 1600 | 160 | 181 | 8.10 | 2-439 | 6.99 | 164.47 | • | 3600 | 360 | 384 | 8.10 | 2-458 | 6.99 | 367.67 | |
| 1700 | 170 | 185.10 | 6.30 | 2-365 | 5.33 | 177.17 | | 3600 | 360 | 384.50 | 8.10 | 2-458 | 6.99 | 367.67 | • |
| 1750 | 175 | 190.10 | 6.30 | 2-365 | 5.33 | 177.17 | | 3700 | 370 | 394 | 8.10 | 2-459 | 6.99 | 380.37 | |
| 1800 | 180 | 195.10 | 6.30 | 2-366 | 5.33 | 183.52 | | 3800 | 380 | 404 | 8.10 | 2-460 | 6.99 | 393.07 | |
| 1800 | 180 | 195.50 | 6.30 | 2-366 | 5.33 | 183.52 | • | 3900 | 390 | 414 | 8.10 | 2-461 | 6.99 | 405.26 | |
| 1800 | 180 | 201 | 8.10 | 2-442 | 6.99 | 183.52 | • | 4000 | 400 | 424 | 8.10 | 2-461 | 6.99 | 405.26 | |
| 1850 | 185 | 200.10 | 6.30 | 2-367 | 5.33 | 189.87 | | 4100 | 410 | 434 | 8.10 | 2-462 | 6.99 | 417.96 | |
| 1900 | 190 | 205.10 | 6.30 | 2-368 | 5.33 | 196.22 | | 4200 | 420 | 444 | 8.10 | 2-463 | 6.99 | 430.66 | |
| 1950 | 195 | 210.10 | 6.30 | 2-368 | 5.33 | 196.22 | | 4300 | 430 | 454 | 8.10 | 2-464 | 6.99 | 443.36 | |
| 2000 | 200 | 220.50 | 8.10 | 2-445 | 6.99 | 202.57 | | 4400 | 440 | 464 | 8.10 | 2-464 | 6.99 | 443.36 | |
| 2000 | 200 | 221 | 8.10 | 2-445 | 6.99 | 202.57 | • | 4500 | 450 | 474 | 8.10 | 2-465 | 6.99 | 456.06 | |
| 2100 | 210 | 230.50 | 8.10 | 2-446 | 6.99 | 215.27 | | 4600 | 460 | 484 | 8.10 | 2-466 | 6.99 | 468.76 | |
| 2200 | 220 | 240.50 | 8.10 | 2-447 | 6.99 | 227.97 | | 4700 | 470 | 494 | 8.10 | 2-467 | 6.99 | 481.46 | |
| 2200 | 220 | 241 | 8.10 | 2-447 | 6.99 | 227.97 | • | 4800 | 480 | 504 | 8.10 | 2-468 | 6.99 | 494.16 | |
| 2300 | 230 | 250.50 | 8.10 | 2-448 | 6.99 | 240.67 | | 4900 | 490 | 514 | 8.10 | 2-469 | 6.99 | 506.86 | |
| 2400 | 240 | 260.50 | 8.10 | 2-449 | 6.99 | 240.67 | | 5000 | 500 | 524 | 8.10 | 2-469 | 6.99 | 506.86 | |

1) ISO 7425-2
Further sizes on request.

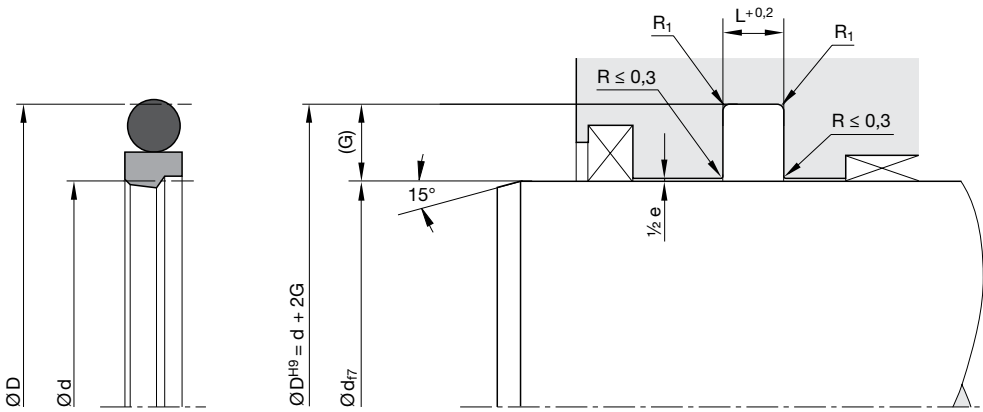

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| Size | Groove | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------|-------------|-----------|-------|------------|------------|-------------------|
| | Ø d (mm) | Ø D (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 5200 | 520 | 544 | 8.10 | 2-470 | 6.99 | 532.26 | |
| 5500 | 550 | 574 | 8.10 | 2-471 | 6.99 | 557.66 | |
| 5700 | 570 | 594 | 8.10 | 2-472 | 6.99 | 582.68 | |
| 6000 | 600 | 624 | 8.10 | 2-473 | 6.99 | 608.08 | |
| 6200 | 620 | 644 | 8.10 | 2-474 | 6.99 | 633.48 | |
| 6400 | 640 | 664 | 8.10 | 2-475 | 6.99 | 658.88 | |
| 6500 | 650 | 677.30 | 9.50 | - | 8.40 | 660.00 | |
| 7000 | 700 | 727.30 | 9.50 | - | 8.40 | 695.00 | |
| 8000 | 800 | 827.30 | 9.50 | - | 8.40 | 810.00 | |
| 9000 | 900 | 927.30 | 9.50 | - | 8.40 | 910.00 | |

1) ISO 7425-2
Further sizes on request.



The BD Ultrathan® rod seal is a compact seal with a secondary sealing lip and an evolution of Parker's Park-O-Pak® seal. The additional sealing edge results in a larger lubricant deposit in the sealing gap. This largely prevents increased wear and achieves longer service life. In addition, the need for a complex tandem arrangement may be eliminated by the second sealing lip in some cases.

Hydraulic cylinders in earth-moving machines are typical applications for this seal. They may involve pressure peaks of up to 1000 bar.

- Exceptionally high static and dynamic sealing performance.
- Enhanced sealing performance in non-pressurized conditions.
- Penetration of air into the system is largely prevented.
- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Easier installation.
- Insensitive to extreme pressure peaks.
- Improved lubrication due to pressure medium deposit in the dynamic contact area.
- Extremely high extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to ISO 5597.
- Installation in closed and undercut housings.
- Low compression set.
- Additional sizes of machined products available on short notice.

Range of application

Mainly for sealing piston rods and plungers in heavy-duty mobile and stationary hydraulic applications.

| | |
|-----------------------|-------------------------------------|
| Operating pressure | ≤ 500 bar |
| Pressure peaks | ≤ 1000 bar |
| Operating temperature | -35 °C to +110 °C |
| Sliding speed | ≤ 0.5 m/s |
| Media | Hydraulic oils based on mineral oil |

Compounds

The compound Ultrathan® P5008 is a Parker material based on polyurethane with a hardness of approx. 93 Shore A.

NBR-O-ring with approx. 70 Shore A.


Back-up ring made of filled polyamide (W5059).

Installation

The seals should have an axial clearance (see columns H and L). To avoid damage at the sealing lips, the seals should not be pulled over sharp edges during installation.

Normally these seals may be snapped into closed grooves. Where access is restricted special assembly tools may be required. Proposals for the design of such tools will be provided on request. For gap sizes see chapter "Maximum Gap Allowance".

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

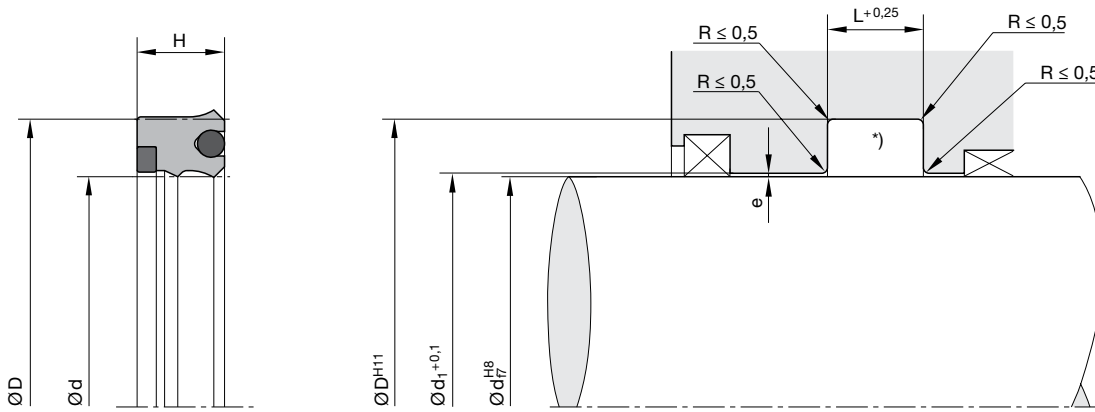

* In the case of designs according to ISO standard, the radii given there should be used.
„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | d ₁ | ISO ¹⁾ | Order code |
|-----|-----|------|------|----------------|-------------------|---------------|
| 40 | 55 | 11.4 | 12.5 | 40.5 | · | BD 0040 00042 |
| 50 | 65 | 11.4 | 12.5 | 50.5 | · | BD 0050 00042 |
| 56 | 71 | 11.4 | 12.5 | 56.5 | | BD 0056 00042 |
| 60 | 75 | 11.4 | 12.5 | 60.5 | | BD 0060 00042 |
| 63 | 78 | 11.4 | 12.5 | 63.5 | | BD 0063 00042 |
| 65 | 80 | 11.4 | 12.5 | 65.5 | | BD 0065 00042 |
| 70 | 85 | 11.4 | 12.5 | 70.5 | · | BD 0070 00042 |
| 75 | 90 | 11.4 | 12.5 | 75.5 | | BD 0075 00042 |
| 80 | 95 | 11.4 | 12.5 | 80.5 | · | BD 0080 00042 |
| 85 | 100 | 11.4 | 12.5 | 85.5 | | BD 0085 00042 |
| 85 | 100 | 12 | 13 | 85.5 | | BD 0086 00042 |
| 90 | 105 | 11.4 | 12.5 | 90.5 | · | BD 0090 00042 |
| 95 | 110 | 12 | 13 | 95.5 | | BD 0092 00042 |
| 100 | 115 | 12 | 13 | 100.5 | | BD 0095 00042 |
| 100 | 120 | 13.5 | 15 | 100.6 | | BD 0099 00042 |
| 100 | 120 | 14.5 | 16 | 100.6 | · | BD 0100 00042 |
| 110 | 130 | 14.5 | 16 | 110.6 | · | BD 0110 00042 |
| 120 | 140 | 14.5 | 16 | 120.6 | | BD 0120 00042 |
| 125 | 145 | 14.5 | 16 | 125.6 | · | BD 0125 00042 |
| 130 | 150 | 14.5 | 16 | 130.6 | | BD 0130 00042 |
| 140 | 160 | 14.5 | 16 | 140.6 | · | BD 0140 00042 |
| 150 | 170 | 14.5 | 16 | 150.6 | | BD 0150 00042 |
| 160 | 180 | 14.5 | 16 | 160.6 | | BD 0160 00042 |
| 170 | 190 | 14.5 | 16 | 170.6 | | BD 0170 00042 |
| 180 | 205 | 18.2 | 20 | 180.8 | · | BD 0180 00042 |
| 190 | 215 | 18.2 | 20 | 190.8 | | BD 0190 00042 |
| 200 | 230 | 22.7 | 25 | 200.8 | · | BD 0200 00042 |
| 220 | 250 | 22.7 | 25 | 220.8 | · | BD 0220 00042 |
| 230 | 260 | 22.7 | 25 | 230.8 | | BD 0230 00042 |
| 240 | 270 | 22.7 | 25 | 240.8 | | BD 0240 00042 |

1) ISO 5597
Further sizes on request.



The BU Ultrathan® rod seal is a compact seal with an integrated anti-extrusion ring. It is frequently used as a buffer seal within sealing systems such as those utilized in construction machine cylinders. Construction machine cylinders operate in harsh conditions in which pressure peaks of up to 1000 bar frequently occur. The BU rod seal is installed upstream to isolate such loads from the secondary seal. Due to its special shape, the seal (like a return valve) is able to return pressure that may build up between the primary and the secondary seal into the system. A single or tandem arrangement of this product series is possible as well.

- Enhanced sealing performance in non-pressurized conditions.
- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Insensitive to extreme pressure peaks.
- Extremely high extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to ISO 5597.
- Dimensions according to ISO 7425-2.
- Short axial assembly length.
- Installation in closed and undercut housings.
- Additional sizes of machined products available on short notice.

Range of application

Mainly used for sealing cylinders in mobile hydraulics.

| | |
|-----------------------|-------------------------------------|
| Operating pressure | ≤ 500 bar |
| Pressure peaks | ≤ 1000 bar |
| Operating temperature | -35 °C to +110 °C |
| Sliding speed | ≤ 0.5 m/s |
| Media | Hydraulic oils based on mineral oil |

Compounds

The compound Ultrathan® P5008 is a Parker material based on polyurethane with a Shore A hardness of approx. 93.


Back-up ring compound: W5019

Installation

The seals should have an axial clearance (see columns H and L). To avoid damage at the sealing lips, the seals should not be pulled over sharp edges during installation.

Normally these seals may be snapped into closed grooves. Where access is restricted special assembly tools may be required. Proposals for the design of such tools will be provided on request. For gap sizes see chapter "Maximum Gap Allowance".

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

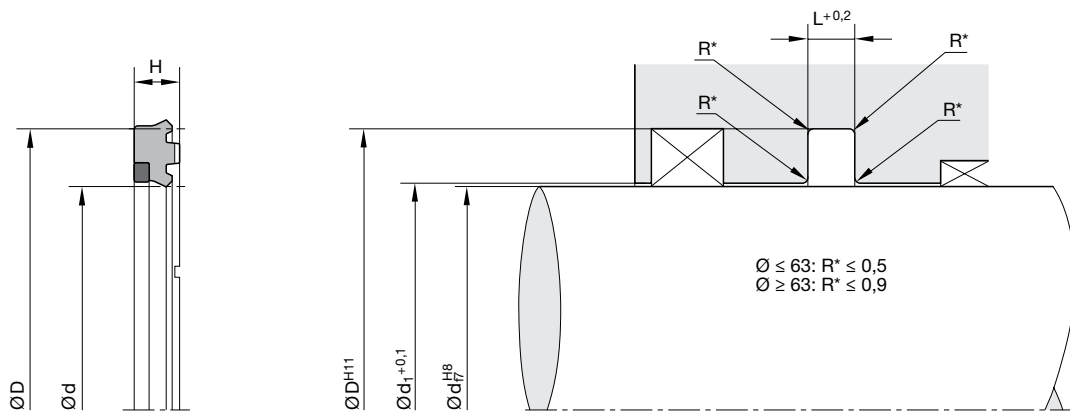








For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | d ₁ | ISO ¹⁾ | ISO ²⁾ | Order code |
|-----|-------|------|------|----------------|-------------------|-------------------|---------------|
| 56 | 71 | 8.5 | 9.5 | 56.5 | · | | BU 0056 00600 |
| 60 | 75 | 8.5 | 9.5 | 60.5 | | | BU 0060 00600 |
| 60 | 75.1 | 6.1 | 6.3 | 60.5 | | | BU 0061 00656 |
| 63 | 78.1 | 6.1 | 6.3 | 63.4 | | | BU 0063 00656 |
| 65 | 80 | 8.5 | 9.5 | 65.4 | | | BU 0065 00600 |
| 65 | 80.5 | 6.1 | 6.3 | 65.4 | · | | BU 0066 00656 |
| 70 | 85 | 8.5 | 9.5 | 70.5 | · | | BU 0070 00600 |
| 70 | 85.1 | 6.1 | 6.3 | 70.5 | | | BU 0071 00656 |
| 75 | 90 | 8.5 | 9.5 | 75.5 | | | BU 0075 00600 |
| 80 | 95 | 8.5 | 9.5 | 80.5 | · | | BU 0080 00600 |
| 80 | 95.1 | 6.1 | 6.3 | 80.5 | | | BU 0084 00656 |
| 80 | 95.5 | 6.1 | 6.3 | 80.4 | · | | BU 0082 00656 |
| 85 | 100.5 | 6.1 | 6.3 | 85.4 | | · | BU 0085 00656 |
| 90 | 105 | 8.5 | 9.5 | 90.5 | · | | BU 0090 00600 |
| 90 | 105.5 | 6.1 | 6.3 | 90.4 | | · | BU 0091 00656 |
| 95 | 110.5 | 6.1 | 6.3 | 95.4 | | · | BU 0094 00656 |
| 100 | 115.5 | 6.1 | 6.3 | 100.4 | | · | BU 0104 00656 |
| 100 | 120 | 11.4 | 12.5 | 100.6 | · | | BU 0100 00600 |
| 110 | 125.5 | 6.1 | 6.3 | 110.4 | | · | BU 0118 00656 |
| 110 | 130 | 11.4 | 12.5 | 110.6 | · | | BU 0110 00600 |
| 120 | 140 | 11.4 | 12.5 | 120.6 | · | | BU 0120 00600 |
| 130 | 150 | 14.5 | 16 | 130.6 | | | BU 0130 00600 |
| 140 | 160 | 14.5 | 16 | 140.6 | · | | BU 0140 00600 |
| 150 | 170 | 14.5 | 16 | 150.6 | · | | BU 0150 00600 |
| 160 | 180 | 14.5 | 16 | 160.6 | | | BU 0160 00600 |
| 170 | 190 | 10.3 | 11 | 170.6 | | | BU 0170 00656 |
| 180 | 205 | 14.5 | 16 | 180.8 | · | | BU 0180 00600 |
| 200 | 225 | 14.5 | 16 | 200.8 | · | | BU 0200 00600 |
| 220 | 250 | 18.2 | 20 | 220.8 | · | | BU 0220 00600 |
| 250 | 280 | 18.2 | 20 | 250.8 | · | | BU 0250 00600 |
| 280 | 310 | 18.2 | 20 | 280.8 | | | BU 0280 00657 |

1) Standard sizes for housings according to ISO 5597.

2) Standard sizes for housings according to ISO 7425-2.

Further sizes on request.

| Profile cross-section | Profile reference | Pressure max. (bar) | Page |
|---|-------------------|---------------------|------|
| Piston seals | | | |
|  | C2 | 160 | 110 |
|  | KR | 300 | 113 |
|  | B7 | 400 | 116 |
|  | OE | 400 | 119 |
|  | OG | 400 | 124 |
|  | ZW | 400 | 129 |
|  | OK | 800 | 132 |



The C2 piston seal meets the requirements of the manufacturers of hydraulic and pneumatic equipment for seals with the smallest possible housings. Although cross-sections and heights are very small the sealing performance is excellent. Extremely low friction is experienced because of the short contact to the sealing surface area. For installation in non-lubricated pneumatic systems (dry air) we recommend our profile E4 which fits into the same housings.

- Good wear resistance.
- Easier installation.
- Suitable for fully automatic installation.
- Assembly on one-part piston is possible.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Installation in closed and undercut housings.

Range of application

Particularly recommended for pistons in hydraulic and pneumatic cylinders.

Operating pressure ¹⁾

| | |
|------------|-----------|
| Hydraulics | ≤ 160 bar |
| Pneumatics | ≤ 16 bar |

Operating temperature

| | |
|------------|-------------------|
| Hydraulics | -25 °C to +100 °C |
| Pneumatics | -25 °C to +80 °C |

Sliding speed ≤ 0.5 m/s

¹⁾ Dependent upon cross-section and compound.

Compounds

Standard: N3584, NBR compound (≈ 80 Shore A).

For low temperatures: N8613, NBR compound (≈ 80 Shore A).


For high temperatures: V3664, FKM compound (≈ 85 Shore A).

Installation

The profile C2 piston seals are manufactured undersized in relation to the nominal dimensions. Only after installation will the sealing lip diameter have the desired dimensions. This lip seal may easily be snapped into the grooves. Care should be taken that the seals are not pulled over sharp edges.

In the case of double-acting pistons, pressure peaks should be avoided. In such cases, sealing elements with larger cross-sections or other profiles with header rings should be used.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

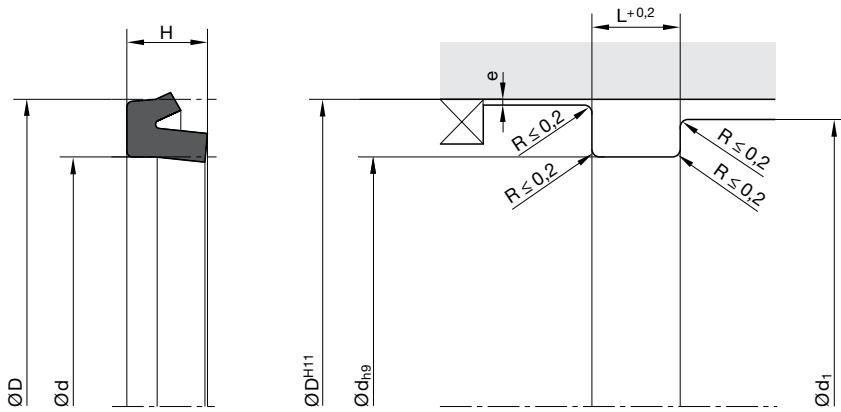


„e“ see chapter „Maximum gap allowance“.
 d_1 = minimum piston diameter on pressure side.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | H | L | d_1 | Order code | D | d | H | L | d_1 | Order code |
|-------|------|-----|-----|-------|---------------|-------|-------|------|------|-------|---------------|
| 4 | 1.5 | 1.7 | 2 | 3 | C2 0010 N3584 | 28 | 20 | 5.5 | 6 | 24 | C2 2065 N3584 |
| 5 | 2 | 2.2 | 2.5 | 4 | C2 0014 N3584 | 30 | 18 | 8 | 8.5 | 24 | C2 3010 N3584 |
| 6 | 2.5 | 2 | 2.3 | 4.5 | C2 0023 N3584 | 30 | 20 | 7 | 7.5 | 25 | C2 3015 N3584 |
| 6 | 3 | 3 | 3.5 | 5 | C2 0025 N3584 | 30 | 22 | 5.5 | 6 | 26 | C2 3018 N3584 |
| 7.5 | 4 | 2 | 2.3 | 6 | C2 0033 N3584 | 32 | 22 | 5 | 5.5 | 27 | C2 3025 N3584 |
| 8 | 3 | 3.5 | 4 | 5.5 | C2 0035 N3584 | 32 | 22 | 7 | 7.5 | 27 | C2 3030 N3584 |
| 8 | 5 | 4 | 4.5 | 7 | C2 0045 N3584 | 32 | 24 | 5.5 | 6 | 28 | C2 3035 N3584 |
| 9.5 | 4.5 | 3.5 | 4 | 7 | C2 0065 N3584 | 35 | 25 | 7 | 7.5 | 30 | C2 3050 N3584 |
| 10 | 3 | 4 | 4.5 | 6.5 | C2 1010 N3584 | 36 | 26 | 7 | 7.5 | 31 | C2 3055 N3584 |
| 10 | 5 | 3.5 | 4 | 7.5 | C2 1020 N3584 | 37 | 29 | 5.5 | 6 | 33 | C2 3063 N3584 |
| 10 | 6 | 4.2 | 4.7 | 8 | C2 1029 N3584 | 38 | 28 | 7 | 7.5 | 33 | C2 3065 N3584 |
| 11 | 6 | 4 | 4.5 | 8.5 | C2 1035 N3584 | 39.69 | 26.99 | 6.35 | 6.85 | 33.5 | C2 3093 N3584 |
| 12 | 6 | 4 | 4.5 | 9 | C2 1040 N3584 | 40 | 30 | 7 | 7.5 | 35 | C2 4005 N3584 |
| 12 | 8 | 3 | 3.5 | 10 | C2 1045 N3584 | 40 | 32 | 5.5 | 6 | 36 | C2 4010 N3584 |
| 13 | 7 | 4 | 4.5 | 10 | C2 1055 N3584 | 45 | 35 | 7 | 7.5 | 40 | C2 4035 N3584 |
| 13.5 | 8 | 4 | 4.5 | 11 | C2 1058 N3584 | 45 | 37 | 6 | 6.5 | 41 | C2 4047 N3584 |
| 14 | 6 | 5.5 | 6 | 10 | C2 1063 N3584 | 46 | 36 | 7 | 7.5 | 41 | C2 4045 N3584 |
| 14 | 8 | 4 | 4.5 | 11 | C2 1066 N3584 | 48 | 40 | 5.5 | 6 | 44 | C2 4065 N3584 |
| 15 | 7 | 5.5 | 6 | 11 | C2 1070 N3584 | 50 | 36 | 10 | 11 | 43 | C2 5005 N3584 |
| 16 | 8 | 5.5 | 6 | 12 | C2 1080 N3584 | 50 | 40 | 7 | 7.5 | 45 | C2 5010 N3584 |
| 16 | 10 | 4 | 4.5 | 13 | C2 1083 N3584 | 50 | 42 | 8 | 8.5 | 46 | C2 5012 N3584 |
| 16 | 10 | 6 | 6.5 | 13 | C2 1086 N3584 | 50.8 | 41.28 | 7.93 | 8.43 | 51 | C2 5016 N3584 |
| 17.5 | 11.7 | 3 | 3.5 | 14.8 | C2 1088 N3584 | 52 | 36 | 12 | 13 | 44 | C2 5020 N3584 |
| 18 | 10 | 5 | 5.5 | 14 | C2 1091 N3571 | 52 | 42 | 7 | 7.5 | 48 | C2 5025 N3584 |
| 18 | 10 | 5.5 | 6 | 14 | C2 1092 N3584 | 55 | 45 | 7 | 7.5 | 50 | C2 5045 N3584 |
| 19.05 | 10.5 | 5.5 | 6 | 15 | C2 1097 N3584 | 60 | 40 | 12 | 13 | 50 | C2 6005 N3584 |
| 20 | 10 | 7 | 7.5 | 15 | C2 2005 N3584 | 60 | 50 | 7 | 7.5 | 55 | C2 6010 N3584 |
| 20 | 12 | 5.5 | 6 | 16 | C2 2010 N3584 | 60 | 50 | 10 | 11 | 55 | C2 6011 N3584 |
| 20 | 14 | 4.2 | 4.7 | 17 | C2 2012 N3584 | 62 | 46 | 12 | 13 | 52 | C2 6020 N3584 |
| 22 | 14 | 5.5 | 6 | 18 | C2 2020 N3584 | 62 | 47 | 10 | 11 | 51.5 | C2 6023 N3582 |
| 24 | 16 | 5.5 | 6 | 20 | C2 2030 N3584 | 62 | 52 | 7 | 7.5 | 57 | C2 6028 N3584 |
| 25 | 17 | 5.5 | 6 | 21 | C2 2040 N3584 | 63 | 53 | 7 | 7.5 | 58 | C2 6035 N3584 |
| 26 | 18 | 5.5 | 6 | 22 | C2 2050 N3584 | 65 | 49 | 12 | 13 | 57 | C2 6045 N3584 |
| 28 | 18 | 8 | 8.5 | 23 | C2 2060 N3584 | 65 | 53 | 10 | 11 | 59 | C2 6050 N3584 |

Further sizes on request.

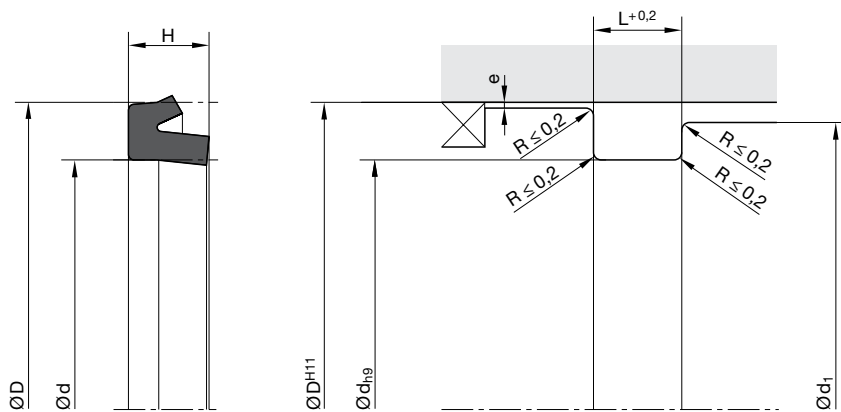

„e“ see chapter „Maximum gap allowance“.
 d_1 = minimum piston diameter on pressure side.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | H | L | d_1 | Order code | D | d | H | L | d_1 | Order code |
|-------|-------|------|-------|-------|---------------|-----|-----|------|------|-------|---------------|
| 65 | 55 | 7 | 7.5 | 60 | C2 6055 N3584 | 140 | 120 | 14 | 15 | 130 | C2 E015 N3584 |
| 67 | 57 | 7 | 7.5 | 62 | C2 6063 N3584 | 140 | 125 | 10 | 11 | 132.5 | C2 E020 N3584 |
| 68 | 58 | 7 | 7.5 | 63 | C2 6070 N3584 | 145 | 130 | 10 | 11 | 137.5 | C2 E040 N3584 |
| 70 | 50 | 14 | 15 | 60 | C2 7005 N3584 | 150 | 135 | 10 | 11 | 142.5 | C2 F015 N3584 |
| 70 | 54 | 12 | 13 | 62 | C2 7010 N3584 | 155 | 130 | 18 | 19 | 142.5 | C2 F025 N3584 |
| 70 | 58 | 8.5 | 9.5 | 64 | C2 7020 N3584 | 155 | 135 | 15 | 16 | 145 | C2 F030 N3582 |
| 74 | 62 | 8.5 | 9.5 | 68 | C2 7035 N3584 | 160 | 140 | 14 | 15 | 150 | C2 G015 N3584 |
| 75 | 55 | 12 | 13 | 65 | C2 7045 N3584 | 160 | 145 | 10 | 11 | 152.5 | C2 G020 N3584 |
| 75 | 59 | 12 | 13 | 67 | C2 7047 N3584 | 175 | 155 | 14 | 15 | 165 | C2 H020 N3584 |
| 75 | 63 | 8.5 | 9.5 | 69 | C2 7050 N3584 | 180 | 160 | 14 | 15 | 170 | C2 J015 N3584 |
| 80 | 60 | 14 | 15 | 70 | C2 8005 N3584 | 190 | 170 | 14 | 15 | 180 | C2 K015 N3584 |
| 80 | 63 | 16 | 17 | 71.5 | C2 8008 N3584 | 200 | 180 | 14 | 15 | 190 | C2 L015 N3584 |
| 80 | 64 | 8 | 8.5 | 72 | C2 8011 N3584 | 220 | 200 | 14 | 15 | 210 | C2 M015 N3584 |
| 80 | 68 | 8.5 | 9.5 | 74 | C2 8015 N3584 | 225 | 200 | 17.5 | 18.5 | 212.5 | C2 M025 N3584 |
| 85 | 73 | 8.5 | 9.5 | 79 | C2 8045 N3584 | 240 | 220 | 14 | 15 | 230 | C2 N015 N3584 |
| 90 | 70 | 12 | 13 | 80 | C2 9015 N3584 | 250 | 230 | 14 | 15 | 240 | C2 N030 N3584 |
| 90 | 78 | 8.5 | 9.5 | 84 | C2 9025 N3584 | 260 | 240 | 14 | 15 | 250 | C2 O015 N3584 |
| 98.43 | 85.73 | 9.52 | 10.32 | 92 | C2 9085 N3584 | 280 | 260 | 14 | 15 | 270 | C2 P015 N3584 |
| 100 | 80 | 15 | 16 | 90 | C2 A010 N3584 | 300 | 280 | 15 | 16 | 290 | C2 Q010 N3584 |
| 100 | 85 | 9.5 | 10.5 | 92.5 | C2 A014 N3584 | 315 | 290 | 17 | 18 | 302.5 | C2 Q020 N3584 |
| 100 | 85 | 12 | 13 | 92.5 | C2 A015 N3584 | 350 | 320 | 21 | 22 | 335 | C2 Q030 N3584 |
| 100 | 88 | 8.5 | 9.5 | 94 | C2 A020 N3584 | 360 | 340 | 14 | 15 | 350 | C2 Q060 N3584 |
| 100 | 90 | 7 | 7.5 | 95 | C2 A025 N3584 | | | | | | |
| 105 | 85 | 15 | 16 | 95 | C2 A040 N3584 | | | | | | |
| 110 | 95 | 10 | 11 | 102.5 | C2 B010 N3584 | | | | | | |
| 115 | 95 | 14 | 15 | 105 | C2 B015 N3584 | | | | | | |
| 120 | 100 | 15 | 16 | 110 | C2 C015 N3584 | | | | | | |
| 120 | 105 | 10 | 11 | 112.5 | C2 C017 N3584 | | | | | | |
| 125 | 105 | 16 | 17 | 115 | C2 C024 N3584 | | | | | | |
| 125 | 110 | 10 | 11 | 117.5 | C2 C025 N3584 | | | | | | |
| 130 | 115 | 10 | 11 | 122.5 | C2 D010 N3584 | | | | | | |
| 135 | 115 | 14 | 15 | 125 | C2 D020 N3584 | | | | | | |
| 136 | 116 | 14 | 15 | 126 | C2 D025 N3578 | | | | | | |
| 140 | 115 | 18 | 19 | 127.5 | C2 E010 N3584 | | | | | | |

Further sizes on request.



The Ultrathan® piston sealing set KR complements the product range of double-acting piston seals (OE, OK) for grooves according to ISO 7425-1 by a product which is preferably used in the medium-duty pressure range up to a maximum of 300 bar. The sealing set stands out by its extreme wear resistance and exceptionally high static and dynamic sealing performance and can also be used for piston accumulators. The KR sealing set consists of a polyurethane slide ring with improved sliding properties and particularly high modulus and an energizer with rectangular cross-section made of an NBR elastomer.

- Exceptionally high static and dynamic sealing performance.
- Good sealing performance in extremely small assembly conditions.
- Can also be used for single-acting applications.
- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Long service life thanks to application-optimized compounds.
- Constantly low dynamic friction throughout the part's service life.
- Easy snap assembly on a single-part piston.
- Insensitive to pressure peaks.
- Functional reliability at critical temperatures.
- High extrusion resistance.
- Dimensions according to ISO 7425-1.
- Short axial assembly length.
- Installation in closed and undercut housings.

Range of application

The KR piston sealing set is suitable for use in all standard industrial cylinders, farming equipment, light construction machinery and mobile devices. Due to its exceptionally high dynamic sealing performance, it is particularly well suited for leakage-critical applications.

| | |
|-----------------------|-------------------|
| Operating pressure | ≤ 300 bar |
| Operating temperature | -35 °C to +110 °C |
| Sliding speed | ≤ 0.5 m/s |

Compounds


Slide ring: Ultrathan® P5062, modified polyurethane with a hardness of approximately 55 Shore D.

Expander ring: NB078, NBR-elastomer with a hardness of approximately 80 Shore A.

Installation

The installation groove must be carefully deburred and cleaned. The cylinder bore must have a leading edge chamfer. Profile KR can be snapped into closed grooves.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

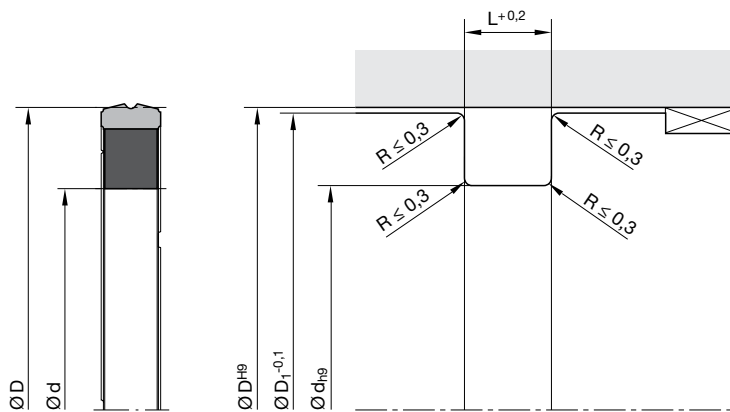


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | L | D ₁ | ISO ¹⁾ | Order code | D | d | L | D ₁ | ISO ¹⁾ | Order code |
|----|------|-----|----------------|-------------------|----------------|-----|-------|------|----------------|-------------------|----------------|
| 20 | 12.5 | 3.2 | 19.7 | | KR 0020 00701 | 75 | 59.5 | 6.3 | 74.6 | | KR 0075 00701 |
| 25 | 14 | 4.2 | 24.7 | . | KR 1025 00701 | 75 | 62 | 6.3 | 74.6 | | KR 2075 00701 |
| 25 | 16 | 4.2 | 24.7 | | KR 2025 00701 | 75 | 64 | 4.2 | 74.7 | | KR 1075 00701* |
| 25 | 17.5 | 3.2 | 24.7 | | KR 0025 00701 | 80 | 59 | 8.1 | 79.5 | | KR 2080 00701* |
| 28 | 20.5 | 3.2 | 27.7 | | KR 0028 00701* | 80 | 59 | 10.5 | 79.5 | | KR 3080 00701* |
| 30 | 19 | 4.2 | 29.7 | | KR 1030 00701* | 80 | 64.5 | 6.3 | 79.6 | . | KR 0080 00701 |
| 30 | 22.5 | 3.2 | 29.7 | | KR 0030 00701* | 80 | 66.5 | 6.3 | 79.6 | | KR 1080 00701 |
| 32 | 21 | 4.2 | 31.7 | . | KR 1032 00701 | 80 | 69 | 4.2 | 79.7 | . | KR 4080 00701 |
| 32 | 24.5 | 3.2 | 31.7 | . | KR 0032 00701 | 85 | 69.5 | 6.3 | 84.7 | | KR 1085 00701* |
| 35 | 27.5 | 3.2 | 34.7 | | KR 0035 00701* | 85 | 71.5 | 6.3 | 84.6 | | KR 0085 00701 |
| 36 | 25 | 4.2 | 35.7 | | KR 0036 00701* | 90 | 69 | 8.1 | 89.5 | | KR 1090 00701 |
| 40 | 24.5 | 6.3 | 39.6 | | KR 1040 00701* | 90 | 69 | 10.5 | 89.5 | | KR 2090 00701 |
| 40 | 27 | 6.3 | 39.6 | | KR 2040 00701* | 90 | 74.5 | 6.3 | 89.6 | | KR 0090 00701 |
| 40 | 29 | 4.2 | 39.7 | . | KR 0040 00701 | 95 | 79.5 | 6.3 | 94.6 | | KR 0095 00701 |
| 40 | 32.5 | 3.2 | 39.7 | . | KR 3040 00701 | 100 | 79 | 8.1 | 99.5 | | KR 2100 00701 |
| 45 | 32 | 6.3 | 44.6 | | KR 1045 00701 | 100 | 84.5 | 6.3 | 99.6 | . | KR 0100 00701 |
| 45 | 34 | 4.2 | 44.7 | | KR 0045 00701 | 100 | 86.5 | 6.3 | 99.6 | | KR 1100 00701 |
| 50 | 34.5 | 6.3 | 49.6 | . | KR 1050 00701 | 105 | 84.5 | 6.3 | 104.6 | | KR 2105 00701 |
| 50 | 37 | 6.3 | 49.6 | | KR 2050 00701* | 105 | 89.5 | 6.3 | 104.6 | | KR 0105 00701 |
| 50 | 39 | 4.2 | 49.7 | . | KR 0050 00701 | 110 | 89 | 8.1 | 109.5 | | KR 1110 00701 |
| 55 | 39.5 | 6.3 | 54.6 | | KR 1055 00701 | 110 | 89 | 10.5 | 109.5 | | KR 2110 00701* |
| 55 | 44 | 4.2 | 54.7 | | KR 0055 00701* | 110 | 94.5 | 6.3 | 109.6 | | KR 0110 00701* |
| 58 | 45 | 6.3 | 57.6 | | KR 0058 00701* | 115 | 94 | 8.1 | 114.5 | | KR 0115 00701 |
| 60 | 44.5 | 6.3 | 59.6 | | KR 1060 00701 | 120 | 99 | 8.1 | 119.5 | | KR 2120 00701 |
| 60 | 49 | 4.2 | 59.7 | | KR 0060 00701 | 120 | 99 | 10.5 | 119.5 | | KR 1120 00701 |
| 63 | 47.5 | 6.3 | 62.6 | . | KR 2063 00701 | 120 | 104.5 | 6.3 | 119.6 | | KR 0120 00701* |
| 63 | 50 | 6.3 | 62.6 | | KR 3063 00701 | 125 | 104 | 8.1 | 124.5 | . | KR 1125 00701 |
| 63 | 52 | 4.2 | 63.7 | . | KR 0063 00701 | 125 | 104 | 10.5 | 124.5 | | KR 2125 00701 |
| 63 | 53 | 5 | 62.7 | | KR 1063 00701* | 125 | 109.5 | 6.3 | 124.6 | . | KR 0125 00701 |
| 65 | 49.5 | 6.3 | 64.7 | | KR 2065 00701* | 140 | 119 | 8.1 | 139.5 | | KR 2140 00701 |
| 65 | 52 | 6.3 | 64.6 | | KR 0065 00701 | 140 | 119 | 10.5 | 139.5 | | KR 0140 00701* |
| 70 | 54.5 | 6.3 | 69.6 | | KR 1070 00701 | 140 | 119 | 12.5 | 139.5 | | KR 1140 00701* |
| 70 | 57 | 6.3 | 69.6 | | KR 2070 00701 | 150 | 129 | 10.5 | 149.5 | | KR 0150 00701* |
| 70 | 59 | 4.2 | 69.7 | | KR 0070 00701 | 160 | 139 | 8.1 | 159.5 | . | KR 0160 00701 |

1) ISO 7425-1

* Moulds not available on the date of printing.

Further sizes on request.

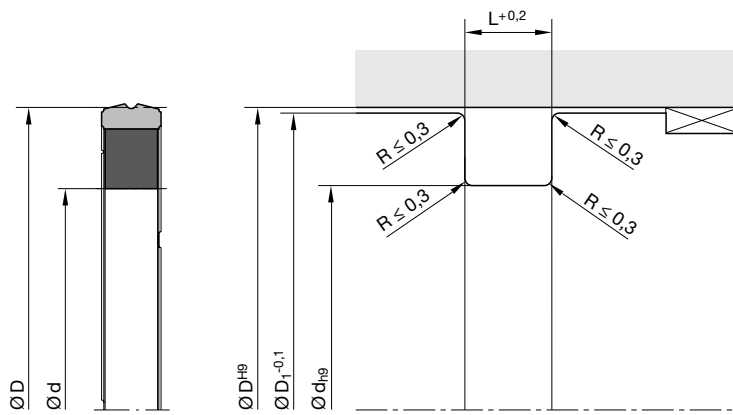

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | L | D ₁ | ISO ¹⁾ | Order code |
|-----|-----|------|----------------|-------------------|----------------|
| 180 | 159 | 8.1 | 179.5 | | KR 0180 00701* |
| 200 | 175 | 12.5 | 199.5 | · | KR 1200 00701* |
| 200 | 179 | 8.1 | 199.5 | · | KR 0200 00701 |

1) ISO 7425-1

* Moulds not available on the date of printing.

Further sizes on request.



The B7 Ultrathan® piston seal is a lip seal with interference fit. It is extremely wear resistant, ensures reliable load holding and is suitable for hydraulic high-pressure applications.

- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Easier installation.
- Suitable for fully automatic installation.
- Assembly on one-part piston is possible.
- Insensitive to pressure peaks.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to ISO 5597.
- Installation in closed and undercut housings.
- Additional sizes of machined products available on short notice.

Range of application

Mainly for the sealing of pistons in heavy duty applications in mobile and stationary hydraulics.

| | |
|-----------------------|-------------------------------------|
| Operating pressure | ≤ 400 bar |
| Operating temperature | -35 °C to +110 °C |
| Sliding speed | ≤ 0.5 m/s |
| Media | Hydraulic oils based on mineral oil |

Compounds


The Ultrathan® P5008 compound is a Parker material based on polyurethane with a hardness of approx. 93 Shore A. Its main advantages in comparison with other polyurethane materials currently available on the market are the increased heat resistance and the lower compression set.

For media containing water, we recommend our hydrolysis-resistant polyurethane compound P5001.

Installation

The seals should have an axial clearance (see columns H and L). To avoid damage at the sealing lips, the seals should not be pulled over sharp edges during installation. Normally these seals may be snapped into closed grooves. Where access is restricted special assembly tools may be required. Proposals for the design of such tools will be provided on request.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

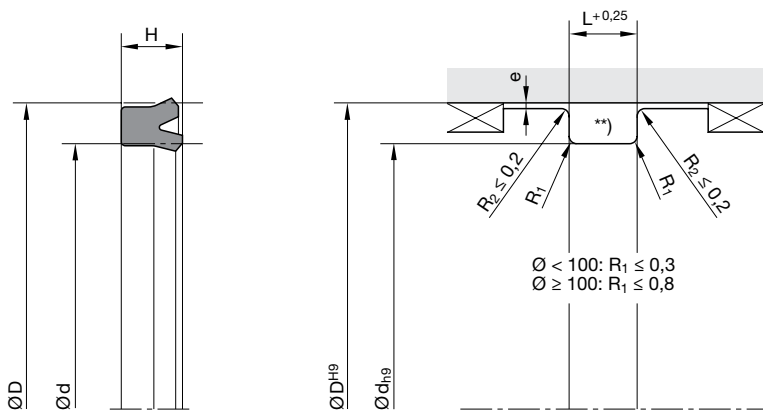

** In the case of designs according to ISO standard, the radii given there should be used.
„e“ see chapter „Maximum gap allowance“.


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | H | L | ISO ¹⁾ | ISO ²⁾ | Order code | D | d | H | L | ISO ¹⁾ | ISO ²⁾ | Order code |
|------|-------|-----|-----|-------------------|-------------------|---------------|-------|-------|------|------|-------------------|-------------------|---------------|
| 15 | 10 | 4.2 | 4.7 | | | B7 1504 P5008 | 60 | 50 | 7.3 | 8 | | | B7 6050 P5008 |
| 16 | 8 | 5.7 | 6.3 | | | B7 1608 P5008 | 60 | 50 | 10 | 11 | | | B7 6009 P5008 |
| 16 | 10 | 5.7 | 6.3 | | | B7 1610 P5008 | 63 | 48 | 8.6 | 9.5 | | | B7 6032 P5008 |
| 20 | 12 | 4.2 | 4.7 | | | B7 2011 P5008 | 63 | 48 | 11.4 | 12.5 | | | B7 6348 P5008 |
| 20 | 12 | 5.7 | 6.3 | | | B7 2012 P5008 | 63 | 53 | 7.3 | 8 | | | B7 6353 P5008 |
| 22 | 12 | 8 | 9 | | | B7 2212 P5008 | 63 | 55 | 5.7 | 6.3 | | | B7 6355 P5008 |
| 24 | 16 | 5.7 | 6.3 | | | B7 2416 P5008 | 65 | 55 | 7.3 | 8 | | | B7 6055 P5008 |
| 25 | 15 | 7.3 | 8 | | | B7 2015 P5008 | 67 | 57 | 7.3 | 8 | | | B7 6709 P5008 |
| 25 | 17 | 4.5 | 5 | | | B7 2516 P5008 | 68 | 58 | 9.5 | 10.5 | | | B7 6805 P5008 |
| 25 | 17 | 5.7 | 6.3 | | | B7 2517 P5008 | 70 | 60 | 7.5 | 8.2 | | | B7 7011 P5008 |
| 25 | 18 | 5 | 5.6 | | | B7 2520 P5008 | 70 | 60 | 12 | 13 | | | B7 7012 P5008 |
| 28 | 20 | 7 | 8 | | | B7 2810 P5008 | 75 | 63 | 8.7 | 9.5 | | | B7 7027 P5008 |
| 32 | 22 | 7.3 | 8 | | | B7 3222 P5008 | 80 | 60 | 14.5 | 16 | | | B7 8060 P5008 |
| 32 | 24 | 5.7 | 6.3 | | | B7 3224 P5008 | 80 | 65 | 8.6 | 9.5 | | | B7 8008 P5008 |
| 32 | 25 | 5 | 5.6 | | | B7 3226 P5008 | 80 | 65 | 11.4 | 12.5 | | | B7 8065 P5008 |
| 34 | 22 | 8.5 | 9.5 | | | B7 3422 P5008 | 80 | 70 | 6.7 | 7.5 | | | B7 8010 P5008 |
| 35 | 25 | 6 | 6.8 | | | B7 3524 P5008 | 80 | 70 | 12 | 13 | | | B7 8011 P5008 |
| 35 | 25 | 7.3 | 8 | | | B7 3525 P5008 | 90 | 75 | 11.4 | 12.5 | | | B7 9075 P5008 |
| 38.1 | 30.1 | 5.7 | 6.3 | | | B7 3810 P5008 | 95 | 80 | 11.4 | 12.5 | | | B7 9580 P5008 |
| 40 | 28 | 10 | 11 | | | B7 4018 P5008 | 100 | 80 | 14.5 | 16 | | | B7 A080 P5008 |
| 40 | 30 | 7.3 | 8 | | | B7 4030 P5008 | 100 | 85 | 11.4 | 12.5 | | | B7 A085 P5008 |
| 40 | 30 | 10 | 11 | | | B7 4031 P5008 | 100 | 88 | 9.5 | 10.5 | | | B7 A088 P5008 |
| 40 | 32 | 5.7 | 6.3 | | | B7 4032 P5008 | 100 | 90 | 6.7 | 7.5 | | | B7 A090 P5008 |
| 40 | 33 | 8 | 9 | | | B7 4033 P5008 | 110 | 90 | 8 | 9 | | | B7 B008 P5008 |
| 43 | 33 | 7.3 | 8 | | | B7 4304 P5008 | 110 | 90 | 15 | 16.5 | | | B7 B004 P5008 |
| 45 | 35 | 7.3 | 8 | | | B7 4535 P5008 | 115 | 98 | 14.5 | 16 | | | B7 B050 P5008 |
| 50 | 35 | 10 | 11 | | | B7 5010 P5008 | 120 | 105 | 11.4 | 12.5 | | | B7 C120 P5008 |
| 50 | 40 | 7.3 | 8 | | | B7 5040 P5008 | 121 | 111.1 | 9.5 | 10.5 | | | B7 C050 P5008 |
| 50 | 40 | 10 | 11 | | | B7 5041 P5008 | 125 | 100 | 18.2 | 20 | | | B7 C210 P5008 |
| 50 | 42 | 5.7 | 6.3 | | | B7 5016 P5008 | 125 | 105 | 14.5 | 16 | | | B7 C215 P5008 |
| 50.8 | 41.17 | 6.2 | 7 | | | B7 5043 P5008 | 125 | 110 | 9.6 | 10.6 | | | B7 C219 P5008 |
| 52 | 42 | 7.3 | 8 | | | B7 5209 P5008 | 145 | 115 | 18 | 20 | | | B7 E050 P5008 |
| 54 | 44 | 7.3 | 8 | | | B7 5409 P5008 | 152.4 | 136.5 | 10 | 11 | | | B7 F024 P5008 |
| 55 | 45 | 7.3 | 8 | | | B7 5545 P5008 | 160 | 135 | 18.2 | 20 | | | B7 G035 P5008 |

1) For housings according to ISO 5597 for ISO 6020-2 cylinders.

2) Standard sizes for housings according to ISO 5597.

Further sizes on request.

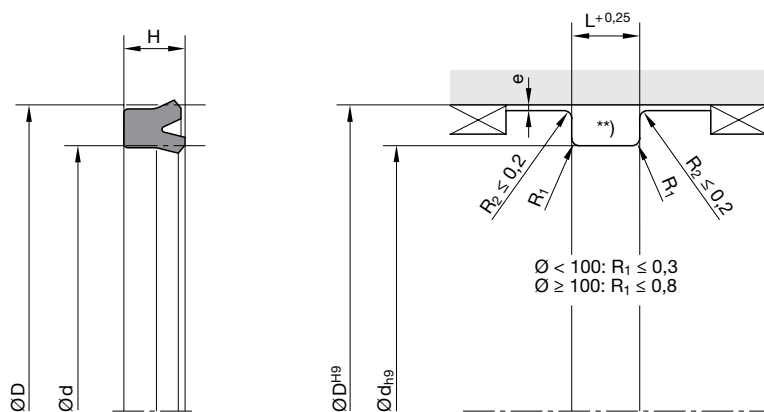

** In the case of designs according to ISO standard, the radii given there should be used.

„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | H | L | ISO ¹⁾ | ISO ²⁾ | Order code |
|-----|-----|------|------|-------------------|-------------------|---------------|
| 160 | 140 | 14.5 | 16 | | · | B7 G040 P5008 |
| 180 | 150 | 18 | 20 | | | B7 J004 P5008 |
| 200 | 170 | 22.7 | 25 | | · | B7 L007 P5008 |
| 200 | 175 | 18.2 | 20 | | · | B7 L010 P5008 |
| 200 | 185 | 9.6 | 10.6 | · | | B7 L013 P5008 |
| 220 | 200 | 15 | 16.5 | | | B7 M020 P5008 |
| 240 | 215 | 15 | 16.5 | | | B7 N010 P5008 |
| 250 | 220 | 22.7 | 25 | | · | B7 N120 P5008 |
| 250 | 225 | 18.2 | 20 | | · | B7 N125 P5008 |
| 250 | 230 | 15 | 16.5 | | | B7 N130 P5008 |
| 310 | 280 | 22.7 | 25 | | | B7 Q028 P5008 |
| 320 | 290 | 20 | 22 | | · | B7 Q210 P5008 |

1) For housings according to ISO 5597 for ISO 6020-2 cylinders.

2) Standard sizes for housings according to ISO 5597.

Further sizes on request.



The double-acting OE piston sealing set featuring a Slipper Seal® design consists of a PTFE piston sealing ring and an elastomer O-ring as a preloading element. The seal design is intended for hydraulic applications. The symmetrical cross section of the sealing ring is designed for uniform return of drag oil during the stroke in both directions. The OE sealing set is particularly well suited for double-acting pistons in control cylinders, servo-controlled systems, machine tools and quick-acting cylinders. Due to the material combination of the slide ring (PTFE) and O-ring (elastomer), this product is suitable for a wide range of applications, especially for aggressive media and/or high temperatures. For hydraulic applications, the piston sealing ring is preferably made from a bronze-filled PTFE compound in order to avoid reliable extrusion resistance. Alternatively, several compounds can be selected, depending on the specific applications profile.

- Good sealing performance in extremely small assembly conditions.
- Can also be used for single-acting applications.
- Excellent wear resistance.
- Minimal break-away and dynamic friction and no stick-slip tendency ensures uniform motion even at low speeds.
- Good energy efficiency due to low friction.
- Assembly on one-part piston is possible.
- Insensitive to pressure peaks.
- High temperature resistance assured by suitable O-ring compound selection.
- High extrusion resistance.
- Adaptable to nearly all media thanks to high chemical resistance of the sealing ring and large O-ring compound selection.
- Dimensions according to ISO 7425-1.
- Short axial assembly length.
- Installation in closed and undercut housings.
- Available in diameters from 4 to 4500 mm.
- Additional sizes of machined products available on short notice.

Range of application

Bei hohen Drücken.

| | |
|---|---------------------------------|
| Operating pressure | ≤ 400 bar |
| in case of reduced extrusion gap (H7/f7) and large cross sections | ≤ 600 bar |
| Operating temperature | -30 °C to +100 °C ¹⁾ |
| Sliding speed | ≤ 4 m/s |

¹⁾ With deviation from standard temperature range, please contact our consultancy service for adequate O-ring compound.


Compounds

Sealing ring: Polon® 052, modified PTFE + 40 % bronze.
O-ring: N0674, NBR elastomer with approx. 70 Shore A.

Installation

This seal should only be used in combination with guiding elements (e.g. F3).

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

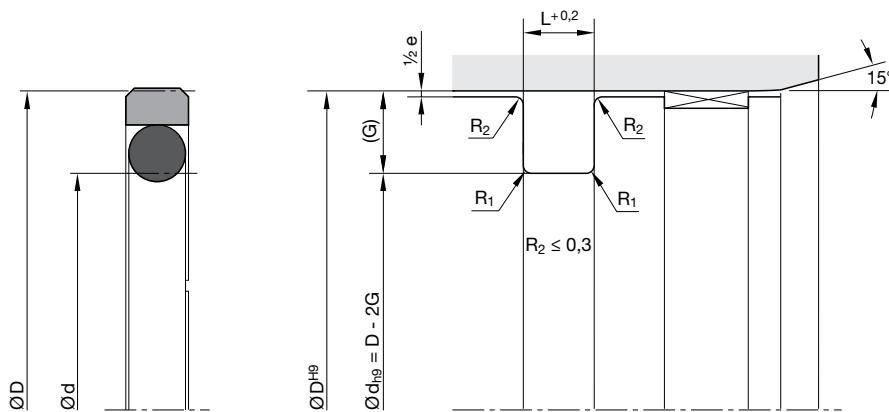


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Housing dimensions

| Series no. | Cross-section | O-ring cross-section (mm) | Recommended piston \varnothing range | | Groove width (mm) | Groove depth (mm) | Gap max. 0200 bar | | Gap max. 200400 bar | | Radius max. R_1 (mm) | ISO ¹⁾ |
|------------|---------------|---------------------------|--|------|-------------------|-------------------|-------------------|-----------|---------------------|--------|------------------------|-------------------|
| | | | \geq | $<$ | | | e (mm) | e (mm) | e (mm) | e (mm) | | |
| 00210 | A | 1.78 | 8 | 15 | 2.2 | 2.45 | 0.6 - 0.4 | 0.4 - 0.2 | 0.5 | | | |
| 00210 | B | 2.62 | 15 | 40 | 3.2 | 3.75 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | ● | | |
| 00210 | C | 3.53 | 40 | 80 | 4.2 | 5.50 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | ● | | |
| 00210 | D | 5.33 | 80 | 133 | 6.3 | 7.75 | 1 - 0.6 | 0.6 - 0.4 | 0.9 | ● | | |
| 00210 | E | 6.99 | 133 | 330 | 8.1 | 10.50 | 1 - 0.6 | 0.6 - 0.4 | 0.9 | ● | | |
| 00210 | F | 6.99 | 330 | 670 | 8.1 | 12.25 | 1.2 - 0.7 | 0.7 - 0.5 | 0.9 | ● | | |
| 00210 | G | 8.4 | 670 | 1000 | 9.5 | 13.65 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | ● | | |
| 00210 | H | 12 | 1000 | - | 13.8 | 19.0 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | ● | | |
| 00210 | K | 1.78 | 8 | 15 | 2.2 | 2.5 | 0.6 - 0.4 | 0.4 - 0.2 | 0.5 | ● | | |
| 00210 | L | 2.62 | 15 | 40 | 3.2 | 3.75 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | ● | | |
| 00210 | M | 3.53 | 40 | 80 | 4.2 | 5.5 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | ● | | |
| 00210 | N | 3.53 | 40 | 80 | 5.0 | 5.0 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | ● | | |
| 00210 | O | 5.33 | 80 | 133 | 6.3 | 7.75 | 1 - 0.6 | 0.6 - 0.4 | 0.9 | ● | | |
| 00210 | P | 5.33 | 80 | 133 | 7.5 | 7.5 | 1 - 0.6 | 0.6 - 0.4 | 0.9 | ● | | |
| 00210 | Q | 6.99 | 133 | 330 | 8.1 | 10.5 | 1 - 0.6 | 0.6 - 0.4 | 0.9 | ● | | |
| 00210 | R | 6.99 | 330 | 670 | 8.1 | 12.25 | 1.2 - 0.7 | 0.7 - 0.5 | 0.9 | ● | | |
| 00210 | S | 6.99 | 133 | 330 | 10.0 | 10.0 | 1.2 - 0.7 | 0.7 - 0.5 | 0.9 | ● | | |
| 00210 | T | 6.99 | 330 | 670 | 12.5 | 12.5 | 1.2 - 0.7 | 0.7 - 0.5 | 0.9 | ● | | |
| 00210 | U | 10.0 | 670 | 1000 | 12.5 | 15.0 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | ● | | |
| 00210 | V | 10.0 | 670 | 1000 | 15.0 | 15.0 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | ● | | |
| 00210 | W | 14.0 | 1000 | - | 20.0 | 20.0 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | ● | | |

1) Housing dimensions according to ISO 7425-1

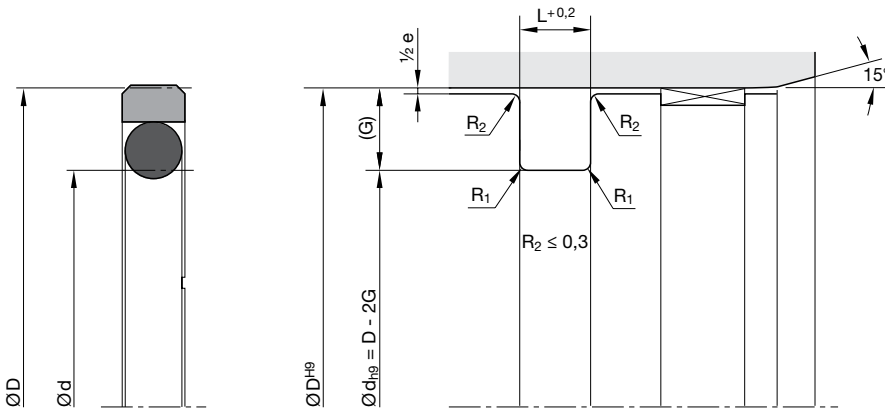

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example


Piston diameter 80 mm

OE 0800 052 00211 D (80.0 x 64.5 x 6.3)

| | | | | |
|-------|-----------------------------------|----------------|--------------------------|---------------|
| OE | Profile | | | |
| 0800 | Piston diameter × 10 | | | |
| 052 | Compound | | | |
| 00211 | Series no. / compound code O-ring | | | |
| | 00210 | without O-ring | | |
| | 00211 | N0674 (NBR) | 70 ^{±5} Shore A | -30 / +110 °C |
| | 00212 | V0747 (FKM) | 75 ^{±5} Shore A | -25 / +200 °C |
| | 00213 | N0756 (NBR) | 75 ^{±5} Shore A | -50 / +110 °C |
| | 00214 | E0540 (EPDM) | 80 ^{±5} Shore A | -40 / +150 °C |
| | 00215 | N3578 (NBR) | 75 ^{±5} Shore A | -30 / +110 °C |
| | 00216 | N0552 (NBR) | 90 ^{±5} Shore A | -30 / +100 °C |
| | 00217 | N1173 (HNBR) | 70 ^{±5} Shore A | -30 / +150 °C |
| D | Cross-section | | | |

Please note:

For certain applications, it might be convenient to use a non-standard cross-section reduced or heavier. In these cases, please replace the standard cross-section code (in above example: „D“) by the one you require (for example „C“ or „E“).

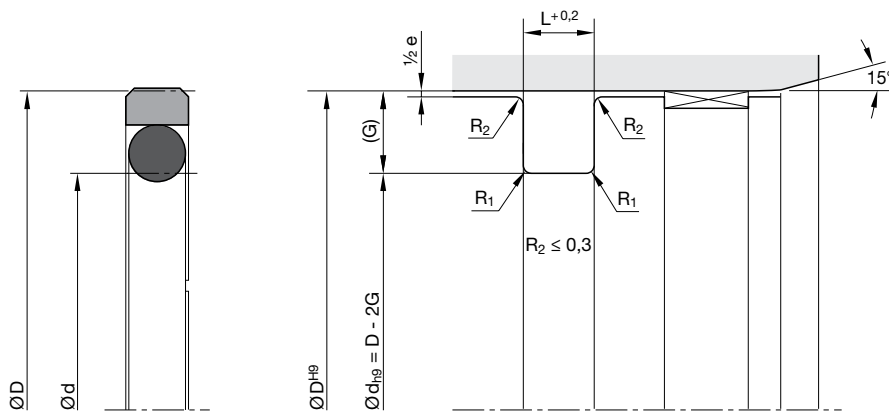


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Standard range

| Size | Groove | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------|-------------|-----------|-------|------------|------------|-------------------|
| | Ø D (mm) | Ø d (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 0080 | 8 | 3.10 | 2.20 | 2-006 | 1.78 | 2.90 | |
| 0100 | 10 | 5.10 | 2.20 | 2-008 | 1.78 | 4.47 | |
| 0120 | 12 | 7.10 | 2.20 | 2-010 | 1.78 | 6.07 | |
| 0150 | 15 | 7.50 | 3.20 | 2-109 | 2.62 | 7.59 | |
| 0160 | 16 | 11 | 2.20 | 2-013 | 1.78 | 10.82 | ● |
| 0160 | 16 | 8.50 | 3.20 | 2-109 | 2.62 | 7.59 | ● |
| 0180 | 18 | 10.50 | 3.20 | 2-110 | 2.62 | 9.19 | |
| 0200 | 20 | 15 | 2.20 | 2-015 | 1.78 | 14 | ● |
| 0200 | 20 | 12.50 | 3.20 | 2-111 | 2.62 | 10.77 | ● |
| 0220 | 22 | 14.50 | 3.20 | 2-113 | 2.62 | 13.94 | |
| 0250 | 25 | 17.50 | 3.20 | 2-115 | 2.62 | 17.12 | ● |
| 0250 | 25 | 14 | 4.20 | 2-207 | 3.53 | 13.87 | ● |
| 0250 | 25 | 15 | 5 | 2-208 | 3.53 | 15.47 | ● |
| 0280 | 28 | 20.50 | 3.20 | 2-116 | 2.62 | 18.72 | |
| 0300 | 30 | 22.50 | 3.20 | 2-118 | 2.62 | 21.89 | |
| 0320 | 32 | 24.50 | 3.20 | 2-119 | 2.62 | 23.47 | ● |
| 0320 | 32 | 21 | 4.20 | 2-211 | 3.53 | 20.22 | ● |
| 0320 | 32 | 22 | 5 | 2-212 | 3.53 | 21.82 | ● |
| 0350 | 35 | 27.50 | 3.20 | 2-121 | 2.62 | 26.64 | |
| 0400 | 40 | 32.50 | 3.20 | 2-124 | 2.62 | 31.42 | ● |
| 0400 | 40 | 29 | 4.20 | 2-216 | 3.53 | 28.17 | ● |
| 0400 | 40 | 30 | 5 | 2-217 | 3.53 | 29.74 | ● |
| 0420 | 42 | 31 | 4.20 | 2-217 | 3.53 | 29.74 | |
| 0450 | 45 | 34 | 4.20 | 2-219 | 3.53 | 32.92 | |
| 0480 | 48 | 37 | 4.20 | 2-221 | 3.53 | 36.09 | |
| 0500 | 50 | 39 | 4.20 | 2-222 | 3.53 | 37.69 | ● |
| 0500 | 50 | 34.50 | 6.30 | 2-324 | 5.33 | 34.29 | ● |
| 0500 | 50 | 35 | 7.50 | 2-324 | 5.33 | 34.29 | ● |
| 0520 | 52 | 41 | 4.20 | 2-223 | 3.53 | 40.87 | |
| 0550 | 55 | 44 | 4.20 | 2-224 | 3.53 | 44.04 | |
| 0600 | 60 | 49 | 4.20 | 2-225 | 3.53 | 47.22 | |
| 0630 | 63 | 52 | 4.20 | 2-226 | 3.53 | 50.39 | ● |
| 0630 | 63 | 47.50 | 6.30 | 2-328 | 5.33 | 46.99 | ● |
| 0630 | 63 | 48 | 7.50 | 2-328 | 5.33 | 46.99 | ● |
| 0650 | 65 | 54 | 4.20 | 2-227 | 3.53 | 53.57 | |
| 0700 | 70 | 59 | 4.20 | 2-228 | 3.53 | 56.74 | |
| 0800 | 80 | 69 | 4.20 | 2-232 | 3.53 | 69.44 | ● |
| 0800 | 80 | 64.50 | 6.30 | 2-333 | 5.33 | 62.87 | ● |
| 0850 | 85 | 69.50 | 6.30 | 2-335 | 5.33 | 69.22 | |
| 0900 | 90 | 74.50 | 6.30 | 2-336 | 5.33 | 72.39 | |
| 0950 | 95 | 79.50 | 6.30 | 2-338 | 5.33 | 78.74 | |
| 1000 | 100 | 89 | 4.20 | 2-238 | 3.53 | 88.49 | ● |
| 1000 | 100 | 84.50 | 6.30 | 2-339 | 5.33 | 81.92 | ● |
| 1050 | 105 | 89.50 | 6.30 | 2-341 | 5.33 | 88.27 | |
| 1100 | 110 | 94.50 | 6.30 | 2-343 | 5.33 | 94.62 | |
| 1150 | 115 | 99.50 | 6.30 | 2-344 | 5.33 | 97.79 | |
| 1200 | 120 | 104.50 | 6.30 | 2-346 | 5.33 | 104.14 | |
| 1250 | 125 | 109.50 | 6.30 | 2-347 | 5.33 | 107.32 | ● |
| 1250 | 125 | 104 | 8.10 | 6-392 | 6.99 | 99 | ● |
| 1250 | 125 | 105 | 10 | 6-392 | 6.99 | 99 | ● |
| 1300 | 130 | 114.50 | 6.30 | 2-349 | 5.33 | 113.67 | |
| 1350 | 135 | 114 | 8.10 | 2-425 | 6.99 | 113.67 | |
| 1400 | 140 | 119 | 8.10 | 2-426 | 6.99 | 116.84 | |
| 1450 | 145 | 124 | 8.10 | 2-428 | 6.99 | 123.19 | |
| 1500 | 150 | 129 | 8.10 | 2-429 | 6.99 | 126.37 | |
| 1550 | 155 | 134 | 8.10 | 2-431 | 6.99 | 132.72 | |
| 1600 | 160 | 144.50 | 6.30 | 2-358 | 5.33 | 142.24 | ● |
| 1600 | 160 | 139 | 8.10 | 2-433 | 6.99 | 139.07 | ● |
| 1600 | 160 | 135 | 12.50 | 2-431 | 6.99 | 132.72 | ● |
| 1650 | 165 | 144 | 8.10 | 2-434 | 6.99 | 142.24 | |

¹⁾ ISO 7425-1

Further sizes on request.

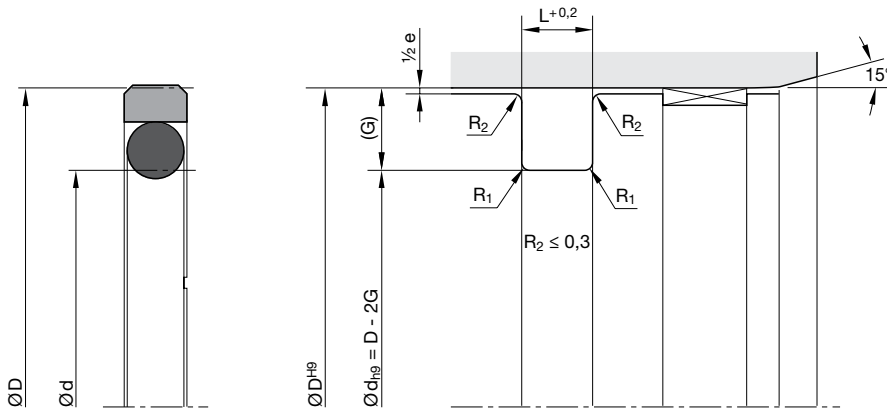

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| Size | Groove | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------|-------------|-----------|-------|------------|------------|-------------------|
| | Ø D (mm) | Ø d (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 1700 | 170 | 149 | 8.10 | 2-436 | 6.99 | 148.59 | |
| 1750 | 175 | 154 | 8.10 | 2-437 | 6.99 | 151.77 | |
| 1800 | 180 | 159 | 8.10 | 2-438 | 6.99 | 158.12 | |
| 1850 | 185 | 164 | 8.10 | 2-439 | 6.99 | 164.47 | |
| 1900 | 190 | 169 | 8.10 | 2-439 | 6.99 | 164.47 | |
| 1950 | 195 | 174 | 8.10 | 2-440 | 6.99 | 170.82 | |
| 2000 | 200 | 184.50 | 6.30 | 2-366 | 5.33 | 183.52 | • |
| 2000 | 200 | 179 | 8.10 | 2-441 | 6.99 | 177.17 | • |
| 2000 | 200 | 175 | 12.50 | 2-440 | 6.99 | 170.82 | • |
| 2100 | 210 | 189 | 8.10 | 2-442 | 6.99 | 183.52 | |
| 2200 | 220 | 199 | 8.10 | 2-444 | 6.99 | 196.22 | |
| 2300 | 230 | 209 | 8.10 | 2-445 | 6.99 | 202.57 | |
| 2400 | 240 | 219 | 8.10 | 2-446 | 6.99 | 215.27 | |
| 2500 | 250 | 229 | 8.10 | 2-447 | 6.99 | 227.97 | • |
| 2500 | 250 | 225.50 | 8.10 | 2-447 | 6.99 | 227.97 | • |
| 2600 | 260 | 239 | 8.10 | 2-447 | 6.99 | 227.97 | |
| 2700 | 270 | 249 | 8.10 | 2-448 | 6.99 | 240.67 | |
| 2800 | 280 | 259 | 8.10 | 2-449 | 6.99 | 253.37 | |
| 2900 | 290 | 269 | 8.10 | 2-450 | 6.99 | 266.07 | |
| 3000 | 300 | 279 | 8.10 | 2-451 | 6.99 | 278.77 | |
| 3100 | 310 | 289 | 8.10 | 2-451 | 6.99 | 278.77 | |
| 3200 | 320 | 299 | 8.10 | 2-452 | 6.99 | 291.47 | • |
| 3200 | 320 | 295.50 | 8.10 | 2-452 | 6.99 | 291.47 | • |
| 3300 | 330 | 305.50 | 8.10 | 2-453 | 6.99 | 304.17 | |
| 3400 | 340 | 315.50 | 8.10 | 2-453 | 6.99 | 304.17 | |
| 3500 | 350 | 325.50 | 8.10 | 2-454 | 6.99 | 316.87 | |
| 3600 | 360 | 335.50 | 8.10 | 2-455 | 6.99 | 329.57 | |
| 3700 | 370 | 345.50 | 8.10 | 2-456 | 6.99 | 342.27 | |
| 3800 | 380 | 355.50 | 8.10 | 2-457 | 6.99 | 354.97 | |
| 3900 | 390 | 365.50 | 8.10 | 2-457 | 6.99 | 354.97 | |

| Size | Groove | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------|-------------|-----------|-------|------------|------------|-------------------|
| | Ø D (mm) | Ø d (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 4000 | 400 | 375.50 | 8.10 | 2-458 | 6.99 | 367.67 | • |
| 4000 | 400 | 370 | 12.50 | 6-672 | 10 | 364 | • |
| 4000 | 400 | 360 | 20 | 6-895 | 14 | 359 | • |
| 4100 | 410 | 385.50 | 8.10 | 2-459 | 6.99 | 380.37 | |
| 4200 | 420 | 395.50 | 8.10 | 2-460 | 6.99 | 393.07 | |
| 4300 | 430 | 405.50 | 8.10 | 2-461 | 6.99 | 405.26 | |
| 4400 | 440 | 415.50 | 8.10 | 2-461 | 6.99 | 405.26 | |
| 4500 | 450 | 425.50 | 8.10 | 2-462 | 6.99 | 417.96 | |
| 4600 | 460 | 435.50 | 8.10 | 2-463 | 6.99 | 430.66 | |
| 4700 | 470 | 445.50 | 8.10 | 2-464 | 6.99 | 443.36 | |
| 4800 | 480 | 455.50 | 8.10 | 2-465 | 6.99 | 456.06 | |
| 4900 | 490 | 465.50 | 8.10 | 2-465 | 6.99 | 456.06 | |
| 5000 | 500 | 475.50 | 8.10 | 2-466 | 6.99 | 468.76 | • |
| 5000 | 500 | 470 | 12.50 | 6-827 | 10 | 470 | • |
| 5200 | 520 | 495.50 | 8.10 | 2-468 | 6.99 | 494.16 | |
| 5500 | 550 | 525.50 | 8.10 | 2-469 | 6.99 | 506.86 | |
| 5700 | 570 | 545.50 | 8.10 | 2-470 | 6.99 | 532.26 | |
| 6000 | 600 | 575.50 | 8.10 | 2-471 | 6.99 | 557.66 | |
| 6200 | 620 | 595.50 | 8.10 | 2-472 | 6.99 | 582.68 | |
| 6400 | 640 | 615.50 | 8.10 | 2-473 | 6.99 | 608.08 | |
| 6500 | 650 | 622 | 9.50 | - | 8.40 | 635 | |
| 7000 | 700 | 672 | 9.50 | - | 8.40 | 660 | |
| 8000 | 800 | 772 | 9.50 | - | 8.40 | 770 | |
| 9000 | 900 | 872 | 9.50 | - | 8.40 | 888 | |

¹⁾ ISO 7425-1
Further sizes on request.



The single-acting OG piston sealing set consists of a PTFE piston sealing ring and an elastomer O-ring as a preloading element. The asymmetrical cross-section of the sealing ring is designed for best drag oil performance during stroke in both directions. The OG sealing set is particularly suitable for single-acting pistons in control cylinders, servo controlled systems, machine tools and quick-acting cylinders. Due to the material combination of the slide ring (PTFE) and the O-ring (elastomer), this product is suitable for a wide range of applications, especially for aggressive media and/or high temperatures. Several compounds can alternatively be selected according to the specific application profile.

- Good sealing performance in extremely small assembly conditions.
- Excellent wear resistance.
- Minimal break-away and dynamic friction and no stick-slip tendency ensures uniform motion even at low speeds.
- Good energy efficiency due to low friction.
- Insensitive to pressure peaks.
- High temperature resistance assured by suitable O-ring compound selection.
- High extrusion resistance.
- Adaptable to nearly all media thanks to high chemical resistance of the sealing ring and large O-ring compound selection.
- Dimensions according to ISO 7425-1.
- Also available as double-acting version.
- Short axial assembly length.
- Installation in closed and undercut housings.
- Available in diameters from 4 to 4500 mm.
- Additional sizes of machined products available on short notice.

Range of application

| | |
|---|---------------------------------|
| Operating pressure | ≤ 400 bar |
| in case of reduced extrusion gap (H7/f7) and large cross sections | ≤ 600 bar |
| Operating temperature | -30 °C to +100 °C ¹⁾ |
| Sliding speed | ≤ 4 m/s |

¹⁾With deviation from standard temperature range, please contact our consultancy service for adequate O-ring compound.


Compounds

Sealing ring: Polon® 052, modified PTFE + 40 % bronze.
O-ring: N0674, NBR elastomer with approx. 70 Shore A.

Installation

This seal should only be used in combination with guiding elements (e.g. F3).

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

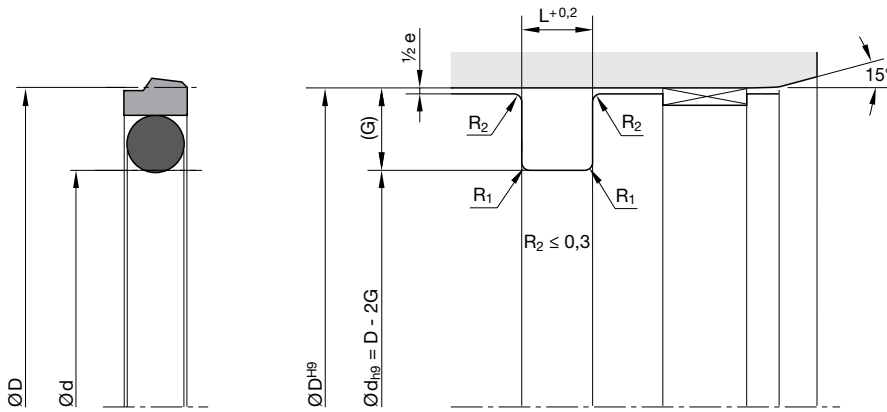


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Housing dimensions

| Series no. | Cross-section | O-ring cross-section (mm) | Recommended piston Ø range | | Groove width (mm) | Groove depth (mm) | Gap max. 0200 bar (mm) | Gap max. 200400 bar (mm) | Radius max. (mm) | ISO ¹⁾ |
|------------|---------------|---------------------------|----------------------------|----------|-------------------|-------------------|------------------------|--------------------------|------------------|-------------------|
| | | | D (mm) ≥ | D (mm) < | | | | | | |
| 00270 | A | 1.78 | 8 | 17 | 2.2 | 2.45 | 0.6 - 0.4 | 0.4 - 0.2 | 0.5 | |
| 00270 | B | 2.62 | 17 | 27 | 3.2 | 3.65 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | |
| 00270 | C | 3.53 | 27 | 60 | 4.2 | 5.35 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | |
| 00270 | D | 5.33 | 60 | 200 | 6.3 | 7.55 | 1.0 - 0.6 | 0.6 - 0.4 | 0.9 | |
| 00270 | E | 6.99 | 200 | 256 | 8.1 | 10.25 | 1.0 - 0.6 | 0.6 - 0.4 | 0.9 | |
| 00270 | F | 6.99 | 256 | 670 | 8.1 | 12 | 1.2 - 0.7 | 0.7 - 0.5 | 0.9 | |
| 00270 | G | 8.4 | 670 | 1000 | 9.5 | 13.65 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | |
| 00270 | H | 12 | 1000 | - | 13.8 | 19 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | |
| 00270 | K | 1.78 | 8 | 17 | 2.2 | 2.5 | 0.6 - 0.4 | 0.4 - 0.2 | 0.5 | • |
| 00270 | L | 2.62 | 17 | 27 | 3.2 | 3.75 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | • |
| 00270 | M | 3.53 | 27 | 60 | 4.2 | 5.5 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | • |
| 00270 | N | 3.53 | 27 | 60 | 5 | 5 | 0.8 - 0.5 | 0.5 - 0.3 | 0.5 | • |
| 00270 | O | 5.33 | 60 | 200 | 6.3 | 7.75 | 1.0 - 0.6 | 0.6 - 0.4 | 0.9 | • |
| 00270 | P | 5.33 | 60 | 200 | 7.5 | 7.5 | 1.0 - 0.6 | 0.6 - 0.4 | 0.9 | • |
| 00270 | Q | 6.99 | 200 | 256 | 8.1 | 10.5 | 1.0 - 0.6 | 0.6 - 0.4 | 0.9 | • |
| 00270 | R | 6.99 | 256 | 670 | 8.1 | 12.25 | 1.2 - 0.7 | 0.7 - 0.5 | 0.9 | • |
| 00270 | S | 6.99 | 200 | 256 | 10 | 10 | 1.2 - 0.7 | 0.7 - 0.5 | 0.9 | • |
| 00270 | T | 6.99 | 256 | 670 | 12.5 | 12.5 | 1.2 - 0.7 | 0.7 - 0.5 | 0.9 | • |
| 00270 | U | 10.00 | 670 | 1000 | 12.5 | 15 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | • |
| 00270 | V | 10.00 | 670 | 1000 | 15 | 15 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | • |
| 00270 | W | 14.00 | 1000 | - | 20 | 20 | 1.4 - 0.8 | 0.8 - 0.6 | 0.9 | • |

1) Housing dimensions according to ISO 7425-1

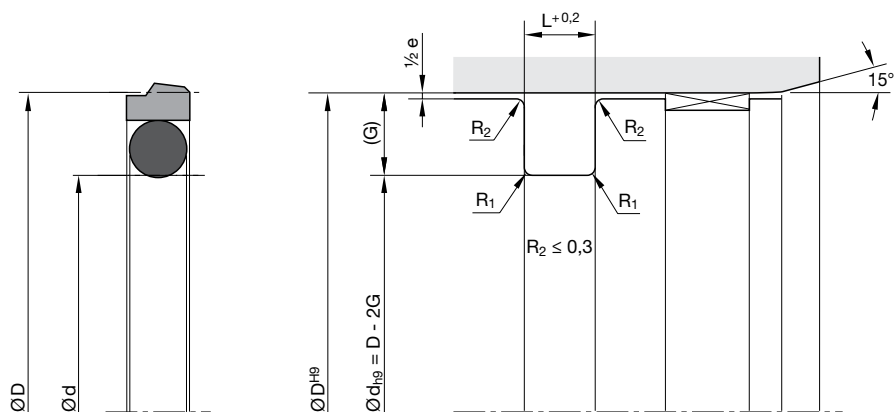

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example


Piston diameter 80 mm

OG 0800 052 00271 D (80 × 64.9 × 6.3)

| | | | | |
|-------|-----------------------------------|----------------|--------------------------|---------------|
| OG | Profile | | | |
| 0800 | Piston diameter × 10 | | | |
| 052 | Compound | | | |
| 00271 | Series no. / compound code O-ring | | | |
| | 00270 | without O-ring | | |
| | 00271 | N0674 (NBR) | 70 ^{±5} Shore A | -30 / +110 °C |
| | 00272 | V0747 (FKM) | 75 ^{±5} Shore A | -25 / +200 °C |
| | 00273 | N0756 (NBR) | 75 ^{±5} Shore A | -50 / +110 °C |
| | 00274 | E0540 (EPDM) | 80 ^{±5} Shore A | -40 / +150 °C |
| | 00275 | N3578 (NBR) | 75 ^{±5} Shore A | -30 / +110 °C |
| | 00276 | N0552 (NBR) | 90 ^{±5} Shore A | -30 / +100 °C |
| | 00277 | N1173 (HNBR) | 70 ^{±5} Shore A | -30 / +150 °C |
| D | Cross-section | | | |

Please note:

For certain applications, it might be convenient to use a non-standard cross-section reduced or heavier. In these cases, please replace the standard cross-section code (in above example: „D“) by the one you require (for example „C“ or „E“).

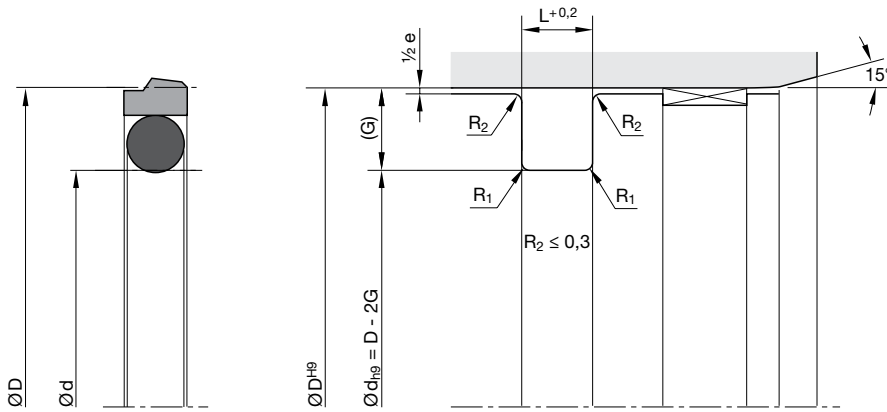


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Standard range

| Size | Groove | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------|-------------|-----------|-------|------------|------------|-------------------|
| | Ø D (mm) | Ø d (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 0080 | 8 | 3.10 | 2.20 | 2-006 | 1.78 | 2.90 | |
| 0100 | 10 | 5.10 | 2.20 | 2-008 | 1.78 | 4.47 | |
| 0120 | 12 | 7.10 | 2.20 | 2-010 | 1.78 | 6.07 | |
| 0150 | 15 | 7.50 | 3.20 | 2-109 | 2.62 | 7.59 | |
| 0160 | 16 | 11 | 2.20 | 2-013 | 1.78 | 10.82 | ● |
| 0160 | 16 | 8.50 | 3.20 | 2-109 | 2.62 | 7.59 | ● |
| 0180 | 18 | 10.50 | 3.20 | 2-110 | 2.62 | 9.19 | |
| 0200 | 20 | 15 | 2.20 | 2-015 | 1.78 | 14 | ● |
| 0200 | 20 | 12.50 | 3.20 | 2-111 | 2.62 | 10.77 | ● |
| 0220 | 22 | 14.50 | 3.20 | 2-113 | 2.62 | 13.94 | |
| 0250 | 25 | 17.50 | 3.20 | 2-115 | 2.62 | 17.12 | ● |
| 0250 | 25 | 14 | 4.20 | 2-207 | 3.53 | 13.87 | ● |
| 0250 | 25 | 15 | 5 | 2-208 | 3.53 | 15.47 | ● |
| 0280 | 28 | 20.50 | 3.20 | 2-116 | 2.62 | 18.72 | |
| 0300 | 30 | 22.50 | 3.20 | 2-118 | 2.62 | 21.89 | |
| 0320 | 32 | 24.50 | 3.20 | 2-119 | 2.62 | 23.47 | ● |
| 0320 | 32 | 21 | 4.20 | 2-211 | 3.53 | 20.22 | ● |
| 0320 | 32 | 22 | 5 | 2-212 | 3.53 | 21.82 | ● |
| 0350 | 35 | 27.50 | 3.20 | 2-121 | 2.62 | 26.64 | |
| 0400 | 40 | 32.50 | 3.20 | 2-124 | 2.62 | 31.42 | ● |
| 0400 | 40 | 29 | 4.20 | 2-216 | 3.53 | 28.17 | ● |
| 0400 | 40 | 30 | 5 | 2-217 | 3.53 | 29.74 | ● |
| 0420 | 42 | 31 | 4.20 | 2-217 | 3.53 | 29.74 | |
| 0450 | 45 | 34 | 4.20 | 2-219 | 3.53 | 32.92 | |
| 0480 | 48 | 37 | 4.20 | 2-221 | 3.53 | 36.09 | |
| 0500 | 50 | 39 | 4.20 | 2-222 | 3.53 | 37.69 | ● |
| 0500 | 50 | 34.50 | 6.30 | 2-324 | 5.33 | 34.29 | ● |
| 0500 | 50 | 35 | 7.50 | 2-324 | 5.33 | 34.29 | ● |
| 0520 | 52 | 41 | 4.20 | 2-223 | 3.53 | 40.87 | |
| 0550 | 55 | 44 | 4.20 | 2-224 | 3.53 | 44.04 | |

| Size | Groove | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------|-------------|-----------|-------|------------|------------|-------------------|
| | Ø D (mm) | Ø d (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 0600 | 60 | 49 | 4.20 | 2-225 | 3.53 | 47.22 | |
| 0630 | 63 | 52 | 4.20 | 2-226 | 3.53 | 50.39 | ● |
| 0630 | 63 | 47.50 | 6.30 | 2-328 | 5.33 | 46.99 | ● |
| 0630 | 63 | 48 | 7.50 | 2-328 | 5.33 | 46.99 | ● |
| 0650 | 65 | 54 | 4.20 | 2-227 | 3.53 | 53.57 | |
| 0700 | 70 | 59 | 4.20 | 2-228 | 3.53 | 56.74 | |
| 0800 | 80 | 69 | 4.20 | 2-232 | 3.53 | 69.44 | ● |
| 0800 | 80 | 64.50 | 6.30 | 2-333 | 5.33 | 62.87 | ● |
| 0850 | 85 | 69.50 | 6.30 | 2-335 | 5.33 | 69.22 | |
| 0900 | 90 | 74.50 | 6.30 | 2-336 | 5.33 | 72.39 | |
| 0950 | 95 | 79.50 | 6.30 | 2-338 | 5.33 | 78.74 | |
| 1000 | 100 | 89 | 4.20 | 2-238 | 3.53 | 88.49 | ● |
| 1000 | 100 | 84.50 | 6.30 | 2-339 | 5.33 | 81.92 | ● |
| 1050 | 105 | 89.50 | 6.30 | 2-341 | 5.33 | 88.27 | |
| 1100 | 110 | 94.50 | 6.30 | 2-343 | 5.33 | 94.62 | |
| 1150 | 115 | 99.50 | 6.30 | 2-344 | 5.33 | 97.79 | |
| 1200 | 120 | 104.50 | 6.30 | 2-346 | 5.33 | 104.14 | |
| 1250 | 125 | 109.50 | 6.30 | 2-347 | 5.33 | 107.32 | ● |
| 1250 | 125 | 104 | 8.10 | 6-392 | 6.99 | 99 | ● |
| 1250 | 125 | 105 | 10 | 6-392 | 6.99 | 99 | ● |
| 1300 | 130 | 114.50 | 6.30 | 2-349 | 5.33 | 113.67 | |
| 1350 | 135 | 114 | 8.10 | 2-425 | 6.99 | 113.67 | |
| 1400 | 140 | 119 | 8.10 | 2-426 | 6.99 | 116.84 | |
| 1450 | 145 | 124 | 8.10 | 2-428 | 6.99 | 123.19 | |
| 1500 | 150 | 129 | 8.10 | 2-429 | 6.99 | 126.37 | |
| 1550 | 155 | 134 | 8.10 | 2-431 | 6.99 | 132.72 | |
| 1600 | 160 | 144.50 | 6.30 | 2-358 | 5.33 | 142.24 | ● |
| 1600 | 160 | 139 | 8.10 | 2-433 | 6.99 | 139.07 | ● |
| 1600 | 160 | 135 | 12.50 | 2-431 | 6.99 | 132.72 | ● |
| 1650 | 165 | 144 | 8.10 | 2-434 | 6.99 | 142.24 | |

¹⁾ ISO 7425-1
Further sizes on request.

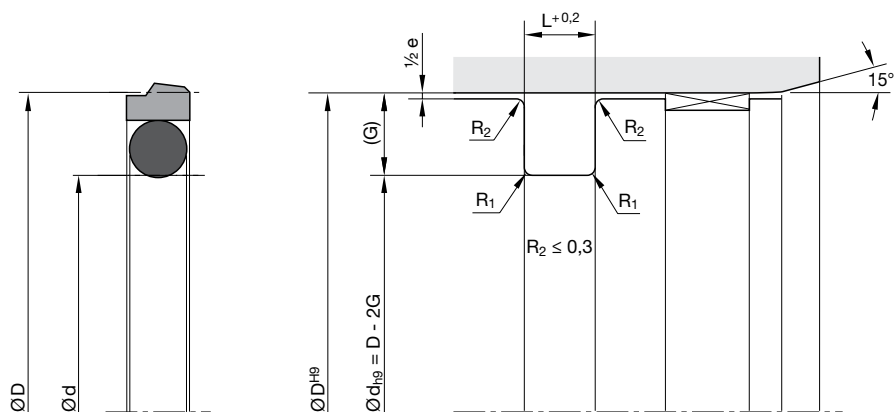

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| Size | Groove | | | No. | O-ring | | ISO ¹⁾ | Size | Groove | | | No. | O-ring | | ISO ¹⁾ |
|------|-------------|-------------|-----------|-------|------------|------------|-------------------|------|-------------|-------------|-----------|-------|------------|------------|-------------------|
| | Ø D (mm) | Ø d (mm) | L (mm) | | CS (mm) | ID (mm) | | | Ø D (mm) | Ø d (mm) | L (mm) | | CS (mm) | ID (mm) | |
| 1700 | 170 | 149 | 8.10 | 2-436 | 6.99 | 148.59 | | 4000 | 400 | 375.50 | 8.10 | 2-458 | 6.99 | 367.67 | ● |
| 1750 | 175 | 154 | 8.10 | 2-437 | 6.99 | 151.77 | | 4000 | 400 | 370 | 12.50 | 6-672 | 10 | 364 | ● |
| 1800 | 180 | 159 | 8.10 | 2-438 | 6.99 | 158.12 | | 4000 | 400 | 360 | 20 | 6-895 | 14 | 359 | ● |
| 1850 | 185 | 164 | 8.10 | 2-439 | 6.99 | 164.47 | | 4100 | 410 | 385.50 | 8.10 | 2-459 | 6.99 | 380.37 | |
| 1900 | 190 | 169 | 8.10 | 2-439 | 6.99 | 164.47 | | 4200 | 420 | 395.50 | 8.10 | 2-460 | 6.99 | 393.07 | |
| 1950 | 195 | 174 | 8.10 | 2-440 | 6.99 | 170.82 | | 4300 | 430 | 405.50 | 8.10 | 2-461 | 6.99 | 405.26 | |
| 2000 | 200 | 184.50 | 6.30 | 2-366 | 5.33 | 183.52 | ● | 4400 | 440 | 415.50 | 8.10 | 2-461 | 6.99 | 405.26 | |
| 2000 | 200 | 179 | 8.10 | 2-441 | 6.99 | 177.17 | ● | 4500 | 450 | 425.50 | 8.10 | 2-462 | 6.99 | 417.96 | |
| 2000 | 200 | 175 | 12.50 | 2-440 | 6.99 | 170.82 | ● | 4600 | 460 | 435.50 | 8.10 | 2-463 | 6.99 | 430.66 | |
| 2100 | 210 | 189 | 8.10 | 2-442 | 6.99 | 183.52 | | 4700 | 470 | 445.50 | 8.10 | 2-464 | 6.99 | 443.36 | |
| 2200 | 220 | 199 | 8.10 | 2-444 | 6.99 | 196.22 | | 4800 | 480 | 455.50 | 8.10 | 2-465 | 6.99 | 456.06 | |
| 2300 | 230 | 209 | 8.10 | 2-445 | 6.99 | 202.57 | | 4900 | 490 | 465.50 | 8.10 | 2-465 | 6.99 | 456.06 | |
| 2400 | 240 | 219 | 8.10 | 2-446 | 6.99 | 215.27 | | 5000 | 500 | 475.50 | 8.10 | 2-466 | 6.99 | 468.76 | ● |
| 2500 | 250 | 229 | 8.10 | 2-447 | 6.99 | 227.97 | ● | 5000 | 500 | 470 | 12.50 | 6-827 | 10 | 470 | ● |
| 2500 | 250 | 225.50 | 8.10 | 2-447 | 6.99 | 227.97 | ● | 5200 | 520 | 495.50 | 8.10 | 2-468 | 6.99 | 494.16 | |
| 2600 | 260 | 239 | 8.10 | 2-447 | 6.99 | 227.97 | | 5500 | 550 | 525.50 | 8.10 | 2-469 | 6.99 | 506.86 | |
| 2700 | 270 | 249 | 8.10 | 2-448 | 6.99 | 240.67 | | 5700 | 570 | 545.50 | 8.10 | 2-470 | 6.99 | 532.26 | |
| 2800 | 280 | 259 | 8.10 | 2-449 | 6.99 | 253.37 | | 6000 | 600 | 575.50 | 8.10 | 2-471 | 6.99 | 557.66 | |
| 2900 | 290 | 269 | 8.10 | 2-450 | 6.99 | 266.07 | | 6200 | 620 | 595.50 | 8.10 | 2-472 | 6.99 | 582.68 | |
| 3000 | 300 | 279 | 8.10 | 2-451 | 6.99 | 278.77 | | 6400 | 640 | 615.50 | 8.10 | 2-473 | 6.99 | 608.08 | |
| 3100 | 310 | 289 | 8.10 | 2-451 | 6.99 | 278.77 | | 6500 | 650 | 622 | 9.50 | - | 8.40 | 635 | |
| 3200 | 320 | 299 | 8.10 | 2-452 | 6.99 | 291.47 | ● | 7000 | 700 | 672 | 9.50 | - | 8.40 | 660 | |
| 3200 | 320 | 295.50 | 8.10 | 2-452 | 6.99 | 291.47 | ● | 8000 | 800 | 772 | 9.50 | - | 8.40 | 770 | |
| 3300 | 330 | 305.50 | 8.10 | 2-453 | 6.99 | 304.17 | | 9000 | 900 | 872 | 9.50 | - | 8.40 | 888 | |
| 3400 | 340 | 315.50 | 8.10 | 2-453 | 6.99 | 304.17 | | | | | | | | | |
| 3500 | 350 | 325.50 | 8.10 | 2-454 | 6.99 | 316.87 | | | | | | | | | |
| 3600 | 360 | 335.50 | 8.10 | 2-455 | 6.99 | 329.57 | | | | | | | | | |
| 3700 | 370 | 345.50 | 8.10 | 2-456 | 6.99 | 342.27 | | | | | | | | | |
| 3800 | 380 | 355.50 | 8.10 | 2-457 | 6.99 | 354.97 | | | | | | | | | |
| 3900 | 390 | 365.50 | 8.10 | 2-457 | 6.99 | 354.97 | | | | | | | | | |

¹⁾ ISO 7425-1

Further sizes on request.



The ZW double-acting piston sealing set consists of an elastomer sealing component, two anti-extrusion and two angular guide rings. By combining the sealing and guiding functions, it offers a cost-effective all-in-one solution for medium-duty standard cylinders.

- Good wear resistance.
- Assembly on one-part piston is possible.
- Installation in closed and undercut housings.

Range of application

Sealing set for double-acting pistons in presses, drive cylinders, back-up and operating cylinders for industrial and mobile hydraulics.

| | |
|----------------------------|-------------------|
| Operating pressure | ≤ 400 bar |
| Operating temperature | -35 °C to +100 °C |
| in HFA, HFB and HFC fluids | +60 °C |
| Sliding speed | ≤ 0.5 m/s |

Compounds

Rubber component: Highly wear-resistant NBR-compound NB078 with a hardness of 80 Shore A.


Anti-extrusion rings: High-strength, wear-optimized polyester elastomer (W5035).

Angular guide rings: Thermoplast for high pressure resistance even with increased temperatures (W5301).

Installation

Sharp edges and burrs in the assembly area of the seal must be removed. Assembly is performed in the following sequence: „rubber seal, anti-extrusion rings, angular guide rings“. Ensure that the contact points (gaps) of the angular guide and anti-extrusion rings are arranged in staggering positions.


In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

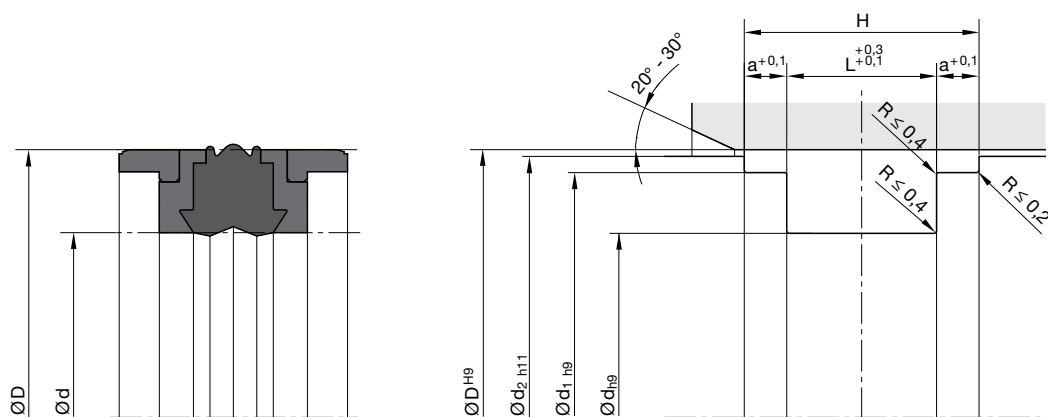

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | L | H | d ₁ | d ₂ | a | Order code |
|-----|----|------|------|----------------|----------------|------|---------------|
| 30 | 21 | 13.5 | 17.7 | 27 | 29 | 2.1 | ZW 0030 00260 |
| 32 | 22 | 15.5 | 20.7 | 28 | 31 | 2.6 | ZW 0032 00260 |
| 40 | 24 | 18.4 | 31.1 | 35.4 | 38.5 | 6.35 | ZW 0040 00260 |
| 40 | 26 | 15.5 | 20.7 | 36 | 39 | 2.6 | ZW 1040 00260 |
| 40 | 30 | 16.4 | 29.1 | 35.4 | 38.5 | 6.35 | ZW 2040 00260 |
| 50 | 34 | 18.4 | 31.1 | 45.4 | 48.5 | 6.35 | ZW 0050 00260 |
| 50 | 34 | 20.5 | 26.7 | 46 | 49 | 3.1 | ZW 1050 00260 |
| 50 | 38 | 20.5 | 28.9 | 46 | 48.5 | 4.2 | ZW 2050 00260 |
| 55 | 39 | 18.4 | 31.1 | 50.36 | 53.5 | 6.35 | ZW 0055 00260 |
| 60 | 44 | 18.4 | 31.1 | 55.4 | 58.5 | 6.35 | ZW 0060 00260 |
| 60 | 44 | 20.5 | 26.7 | 56 | 59 | 3.1 | ZW 1060 00260 |
| 60 | 48 | 20.5 | 28.9 | 56 | 58.5 | 4.2 | ZW 2060 00260 |
| 63 | 47 | 18.4 | 31.1 | 58.4 | 61.5 | 6.35 | ZW 0063 00260 |
| 63 | 47 | 19.4 | 32.1 | 58.4 | 61.5 | 6.35 | ZW 1063 00260 |
| 63 | 47 | 20.5 | 26.7 | 59 | 62 | 3.1 | ZW 2063 00260 |
| 63 | 51 | 20.5 | 28.9 | 59 | 61.5 | 4.2 | ZW 3063 00260 |
| 65 | 49 | 20.5 | 26.7 | 61 | 64 | 3.1 | ZW 0065 00260 |
| 65 | 50 | 18.4 | 31.1 | 60.4 | 63.5 | 6.35 | ZW 1065 00260 |
| 70 | 50 | 22.4 | 35.1 | 64.2 | 68.3 | 6.35 | ZW 0070 00260 |
| 70 | 54 | 20.5 | 26.7 | 66 | 69 | 3.1 | ZW 1070 00260 |
| 70 | 58 | 20.5 | 28.9 | 66 | 68.5 | 4.2 | ZW 2070 00260 |
| 75 | 55 | 22.4 | 35.1 | 69.2 | 73.3 | 6.35 | ZW 0075 00260 |
| 80 | 60 | 22.4 | 35.1 | 74.15 | 78.3 | 6.35 | ZW 0080 00260 |
| 80 | 62 | 22.5 | 29.7 | 76 | 79 | 3.6 | ZW 1080 00260 |
| 80 | 66 | 22.5 | 32.9 | 76 | 78.5 | 5.2 | ZW 2080 00260 |
| 85 | 65 | 22.4 | 31.5 | 79.3 | 83.3 | 6.35 | ZW 0085 00260 |
| 90 | 70 | 22.4 | 35.1 | 84.15 | 88.3 | 6.35 | ZW 0090 00260 |
| 90 | 72 | 22.5 | 29.7 | 86 | 89 | 3.6 | ZW 1090 00260 |
| 100 | 75 | 22.4 | 35.1 | 93.15 | 98 | 6.35 | ZW 0100 00260 |
| 100 | 82 | 22.5 | 29.7 | 96 | 99 | 3.6 | ZW 1100 00260 |
| 100 | 86 | 22.5 | 32.9 | 96 | 98.5 | 5.2 | ZW 2100 00260 |
| 105 | 80 | 22.4 | 35.4 | 98.1 | 103 | 6.5 | ZW 0105 00260 |
| 110 | 85 | 22.4 | 35.1 | 103.1 | 108 | 6.35 | ZW 0110 00260 |
| 110 | 92 | 22.5 | 29.7 | 106 | 109 | 3.6 | ZW 1110 00260 |

Further sizes on request.

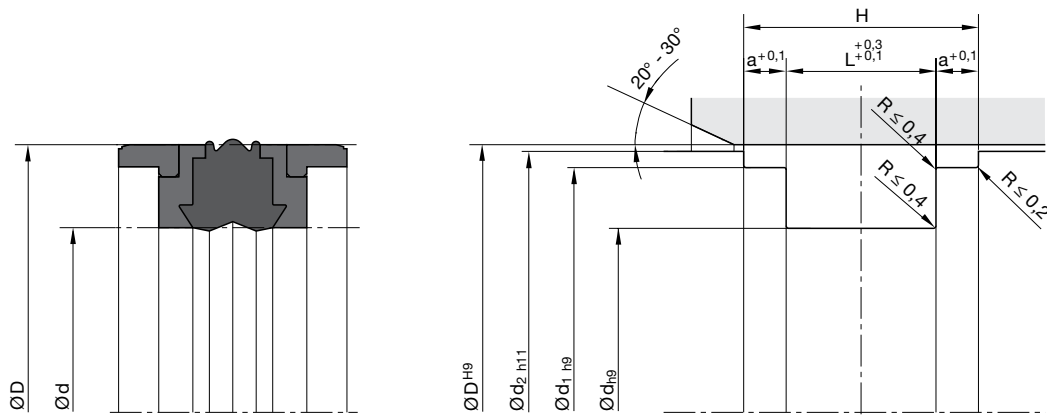

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | L | H | d ₁ | d ₂ | a | Order code |
|-----|-----|------|------|----------------|----------------|------|---------------|
| 110 | 96 | 22.5 | 32.9 | 106 | 109.4 | 5.2 | ZW 2110 00260 |
| 115 | 90 | 22.4 | 35.1 | 108.1 | 113 | 6.35 | ZW 0115 00260 |
| 115 | 97 | 22.5 | 29.7 | 111 | 114 | 3.6 | ZW 1115 00260 |
| 120 | 95 | 22.4 | 35.1 | 113.1 | 118 | 6.35 | ZW 0120 00260 |
| 125 | 100 | 25.4 | 38.1 | 118.1 | 123 | 6.35 | ZW 0125 00260 |
| 125 | 108 | 26.5 | 40.9 | 121 | 124.4 | 7.2 | ZW 2125 00260 |
| 140 | 115 | 25.4 | 38.1 | 133 | 138 | 6.35 | ZW 1140 00260 |
| 140 | 115 | 25.4 | 44.4 | 132.6 | 137.5 | 9.5 | ZW 0140 00260 |
| 140 | 118 | 26.5 | 36.7 | 136 | 139 | 5.1 | ZW 2140 00260 |
| 150 | 125 | 25.4 | 38.1 | 143 | 148 | 6.35 | ZW 1150 00260 |
| 150 | 125 | 25.4 | 44.4 | 142.6 | 147.5 | 9.5 | ZW 0150 00260 |
| 160 | 130 | 25.4 | 38.1 | 152.7 | 158 | 6.35 | ZW 3160 00260 |
| 160 | 135 | 25.4 | 44.4 | 152.6 | 157.5 | 9.5 | ZW 0160 00260 |
| 170 | 145 | 25.4 | 50.8 | 161.7 | 167.1 | 12.7 | ZW 0170 00260 |
| 180 | 150 | 35.4 | 48.1 | 172.95 | 177.87 | 6.35 | ZW 0180 00260 |
| 180 | 155 | 25.4 | 50.8 | 171.7 | 177.1 | 12.7 | ZW 1180 00260 |
| 200 | 175 | 25.4 | 50.8 | 191.6 | 197 | 12.7 | ZW 0200 00260 |
| 220 | 190 | 35.4 | 48.1 | 212.7 | 217.9 | 6.35 | ZW 0220 00260 |
| 250 | 220 | 35.4 | 48.1 | 242.9 | 247.85 | 6.35 | ZW 0250 00260 |
| 250 | 225 | 25.4 | 50.8 | 241.6 | 247 | 12.7 | ZW 1250 00260 |

Further sizes on request.



The profile OK piston sealing set is primarily designed for heavy-duty hydraulic applications and is preferably used in double-acting cylinders. It is extremely robust and withstands even extreme pressure peaks.

The sealing set consists of a plastic slide ring and an elastomer energizer.

- Extreme wear resistance.
- Easy installation on single-part piston without assembly aids due to the split design of the sealing ring.
- Assembly on one-part piston is possible.
- Insensitive to extreme pressure peaks.
- Extremely high extrusion resistance.
- High extrusion resistance in case of high pressures and large gaps due to the special compound properties of the seal ring.
- Dimensions according to ISO 7425-1.
- Short axial assembly length.
- Installation in closed and undercut housings.
- Additional sizes of machined products available on short notice.

Range of application

| | |
|-----------------------|-------------------|
| Operating pressure | ≤ 800 bar |
| Operating temperature | -30 °C to +110 °C |
| Sliding speed | ≤ 1 m/s |

Compounds


Sealing ring: filled modified thermoplast (W5019).

Expander ring: NBR-based elastomer with approx. 70 Shore A (N3571).

Installation

The installation groove must be carefully deburred and cleaned. The cylinder bore must have a leading edge chamfer. Profile OK can be snapped into closed grooves.


In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

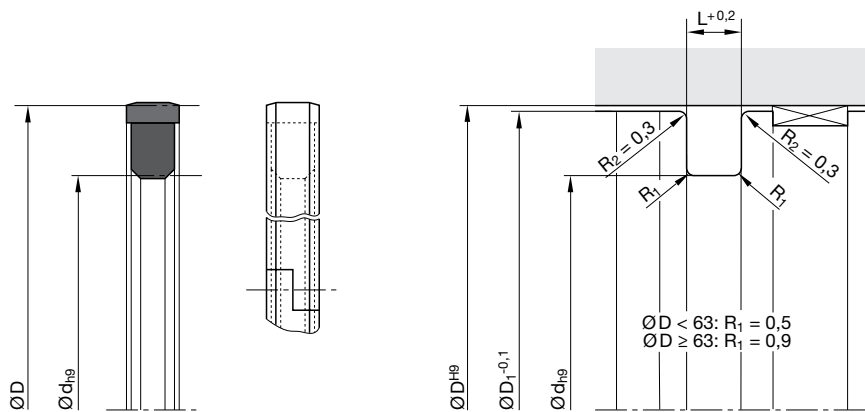

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | L | D ₁ | ISO ¹⁾ | Order code | D | d | L | D ₁ | ISO ¹⁾ | Order code |
|-----|------|-----|----------------|-------------------|---------------|-------|-------|-----|----------------|-------------------|---------------|
| 25 | 16 | 4.2 | 24.3 | | OK 0025 00704 | 125 | 109.5 | 6.3 | 124 | | OK 0124 00701 |
| 32 | 21 | 4.2 | 31.3 | | OK 0032 00704 | 130 | 109 | 8 | 128.8 | | OK 0130 00701 |
| 40 | 26.3 | 5.8 | 39.2 | | OK 0040 00701 | 130 | 115 | 8 | 128.8 | | OK 0132 00701 |
| 40 | 29 | 4.2 | 39.3 | | OK 0040 00704 | 135 | 114 | 8 | 133.8 | | OK 1135 00701 |
| 50 | 34.5 | 6.3 | 49 | | OK 0049 00701 | 135 | 119.5 | 6.3 | 134 | | OK 0135 00704 |
| 50 | 36.3 | 5.8 | 49.2 | | OK 0050 00701 | 140 | 119 | 8 | 138.8 | | OK 0140 00701 |
| 50 | 37 | 8 | 49.2 | | OK 0051 00704 | 140 | 125 | 8 | 138.8 | | OK 0141 00701 |
| 50 | 39 | 4.2 | 49.3 | | OK 0050 00704 | 145 | 124 | 8 | 143.8 | | OK 0145 00701 |
| 55 | 44 | 4.2 | 54.3 | | OK 0054 00704 | 150 | 129 | 8 | 148.8 | | OK 0150 00701 |
| 60 | 41.7 | 7 | 59.2 | | OK 0061 00704 | 150 | 135 | 8 | 148.8 | | OK 0151 00701 |
| 60 | 49 | 4.2 | 59.3 | | OK 0060 00704 | 152.4 | 131.5 | 8 | 151.2 | | OK 0152 00701 |
| 63 | 44.7 | 7 | 62.2 | | OK 0063 00701 | 160 | 139 | 8 | 158.8 | | OK 0160 00701 |
| 63 | 47.5 | 6.3 | 62 | | OK 0062 00701 | 160 | 148 | 8 | 158.8 | | OK 0163 00701 |
| 63 | 52 | 4.2 | 62.2 | | OK 0064 00704 | 165 | 144 | 8 | 163.8 | | OK 0165 00701 |
| 70 | 51.7 | 7 | 69.2 | | OK 0070 00701 | 170 | 149 | 8 | 168.8 | | OK 0170 00701 |
| 70 | 54.5 | 6.3 | 69.2 | | OK 0072 00704 | 175 | 154 | 8 | 173.8 | | OK 0175 00704 |
| 70 | 59 | 4.2 | 69.3 | | OK 0070 00704 | 180 | 159 | 8 | 178.8 | | OK 0180 00701 |
| 75 | 54 | 8 | 74.2 | | OK 0075 00701 | 190 | 169 | 8 | 188.8 | | OK 0190 00701 |
| 75 | 59.5 | 6.3 | 74 | | OK 0076 00701 | 200 | 179 | 8 | 198.8 | | OK 0200 00701 |
| 80 | 59 | 8 | 79 | | OK 0080 00701 | 210 | 189 | 8 | 208.4 | | OK 0210 00701 |
| 80 | 64.5 | 6.3 | 79 | | OK 0083 00701 | 220 | 199 | 8 | 218.4 | | OK 0220 00701 |
| 85 | 64 | 8 | 84 | | OK 0085 00701 | 220 | 205 | 8 | 218.4 | | OK 0221 00701 |
| 90 | 69 | 8 | 89 | | OK 0090 00701 | 230 | 209 | 8 | 228.4 | | OK 0230 00704 |
| 90 | 74.5 | 6.3 | 89 | | OK 0091 00701 | 240 | 225 | 8 | 238.4 | | OK 0240 00701 |
| 95 | 74 | 8 | 94 | | OK 0095 00704 | 250 | 229 | 8 | 248.4 | | OK 0250 00701 |
| 100 | 79 | 8 | 99 | | OK 0100 00701 | 260 | 239 | 8 | 258.4 | | OK 0260 00704 |
| 100 | 84.5 | 6.3 | 99 | | OK 0101 00701 | 270 | 249 | 8 | 268.4 | | OK 0270 00701 |
| 105 | 84 | 8 | 103.8 | | OK 0105 00701 | 280 | 255.5 | 8 | 278.4 | | OK 0280 00701 |
| 110 | 89 | 8 | 108.8 | | OK 0110 00701 | 290 | 271 | 9.5 | 287.8 | | OK 0290 00701 |
| 110 | 94.5 | 6.3 | 109 | | OK 0111 00701 | 300 | 272 | 9.5 | 297.8 | | OK 0300 00701 |
| 115 | 94 | 8 | 113.8 | | OK 0115 00701 | 320 | 292 | 9.5 | 317.8 | | OK 0320 00701 |
| 115 | 100 | 8 | 113.8 | | OK 0116 00701 | 330 | 302 | 9.5 | 327.8 | | OK 0330 00701 |
| 120 | 99 | 8 | 118.8 | | OK 0120 00701 | 350 | 322 | 9.5 | 347.8 | | OK 0350 00701 |
| 125 | 104 | 8 | 123.8 | | OK 0125 00701 | 370 | 342 | 9.5 | 367.8 | | OK 0370 00701 |









1) ISO 7425-1
Further sizes on request.

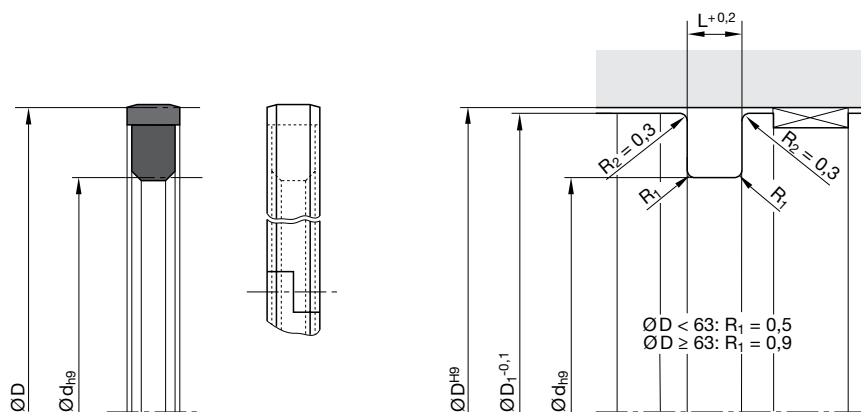

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | L | D ₁ | ISO ¹⁾ | Order code |
|-----|-----|-----|----------------|-------------------|---------------|
| 420 | 392 | 9.5 | 417.8 | | OK 0420 00701 |
| 450 | 422 | 9.5 | 447.8 | | OK 0451 00701 |
| 480 | 452 | 9.5 | 477.8 | | OK 0480 00701 |

1) ISO 7425-1
Further sizes on request.

| Profile cross-section | Profile reference | Page |
|---|-------------------|------|
| O-rings | | |
|  | V1 | 136 |
| Anti-extrusion rings | | |
|  | XA, XB, XC | 142 |
| Static radial seal | | |
|  | HS | 145 |
| Flange seals | | |
|  | OV | 147 |
| Rotary seals | | |
|  | KA | 150 |
|  | OR | 152 |
|  | RS | 157 |
| Sealing sets for piston accumulators | | |
|  | KS | 159 |



- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Suitable for fully automatic installation.
- Insensitive to pressure peaks.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Installation in closed and undercut housings.
- Can be used in existing O-ring grooves.
- Additional sizes of machined products available on short notice.

The Ultrathan® V1 O-ring is an alternative to conventional rubber elastomer O-rings. Due to the extrusion resistance of the polyurethane compounds, there is no need to use a back-up ring at higher or pulsating pressures. By eliminating the need for back-up rings the required width of the groove is reduced.

Due to its high wear resistance, a polyurethane O-ring is also suitable for dynamic pneumatics applications. Very good results have been achieved, for instance, in pneumatic valves for sealing pilot and main control pistons.

Range of application

The Ultrathan® O-rings are used when the physical properties of other compounds are insufficient.

Mainly for the sealing of cylinders, controls and valves.

| | |
|------------------------------|--|
| Operating pressure | ≤ 600 bar ¹⁾ |
| Operating temperature | |
| Hydraulics | -35 °C to +100 °C |
| in water, HFA and HFB fluids | -35 °C to +50 °C |
| Pneumatics | -35 °C to +80 °C |
| Sliding speed | ≤ 0.5 m/s |
| Media | Hydraulic oils based on mineral oil, HFA, and HFB fluids |

¹⁾ With reduced extrusion gap and suitable cross-section.

Compounds

The compound Ultrathan® P5008 is a Parker standard material based on polyurethane with a Shore A hardness of approx. 93. Its main advantages in comparison with other polyurethane materials currently available on the market are the increased heat resistance and the lower compression set.

For fluids containing water, we recommend our hydrolysis-resistant compounds P5000, P5001, P5012 and P5070.

Installation


Due to the higher modulus of the polyurethane compounds, the housings are slightly different from those of standard O-rings.

All edges should be rounded by at least R = 0.1.

In the case of special applications, please discuss your problems with our consultancy service.

Polyurethane O-rings show no tendency to twisting.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

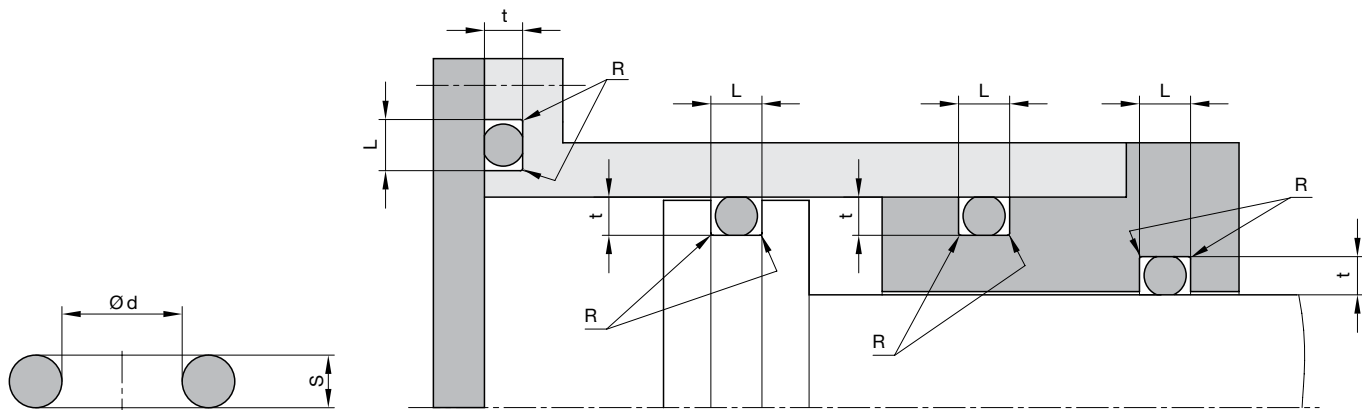


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

O-ring glandsizes



| S (mm) | R (mm) | Groove depth (radial) t (mm)* | | | | Groove width (axial) L (mm) |
|-----------|-----------|----------------------------------|-----------------------|-----------------------|-----------------------------|--------------------------------|
| | | static | dynamic hydraulic | dynamic pneumatic | without anti-extrusion ring | |
| 1.00 | 0.2 | 0.65 ^{±0.05} | 0.75 ^{±0.02} | 0.80 ^{±0.02} | 1.4 ^{+0.2} | |
| 1.50 | 0.2 | 1.05 ^{±0.05} | 1.20 ^{±0.02} | 1.25 ^{±0.02} | 2.0 ^{+0.2} | |
| 1.80 | 0.2 | 1.30 ^{±0.05} | 1.45 ^{±0.02} | 1.55 ^{±0.02} | 2.4 ^{+0.2} | |
| 2.00 | 0.2 | 1.50 ^{±0.05} | 1.65 ^{±0.02} | 1.75 ^{±0.02} | 2.7 ^{+0.2} | |
| 2.50 | 0.2 | 1.95 ^{±0.05} | 2.10 ^{±0.02} | 2.20 ^{±0.02} | 3.4 ^{+0.2} | |
| 2.65 | 0.3 | 2.05 ^{±0.05} | 2.25 ^{±0.02} | 2.35 ^{±0.02} | 3.6 ^{+0.2} | |
| 3.00 | 0.3 | 2.40 ^{±0.05} | 2.55 ^{±0.02} | 2.70 ^{±0.02} | 4.2 ^{+0.2} | |
| 3.50 | 0.3 | 2.80 ^{±0.07} | 3.05 ^{±0.05} | 3.20 ^{±0.05} | 4.8 ^{+0.2} | |
| 3.55 | 0.3 | 2.85 ^{±0.07} | 3.10 ^{±0.05} | 3.25 ^{±0.05} | 4.8 ^{+0.2} | |
| 4.00 | 0.3 | 3.25 ^{±0.07} | 3.50 ^{±0.05} | 3.65 ^{±0.05} | 5.4 ^{+0.2} | |
| 5.00 | 0.3 | 4.15 ^{±0.10} | 4.45 ^{±0.05} | 4.65 ^{±0.05} | 6.8 ^{+0.2} | |
| 5.30 | 0.5 | 4.40 ^{±0.10} | 4.70 ^{±0.05} | 4.90 ^{±0.05} | 7.2 ^{+0.2} | |
| 7.00 | 0.5 | 5.85 ^{±0.10} | 6.25 ^{±0.05} | 6.55 ^{±0.05} | 9.6 ^{+0.2} | |

* Groove depth t = Back-up dimension t

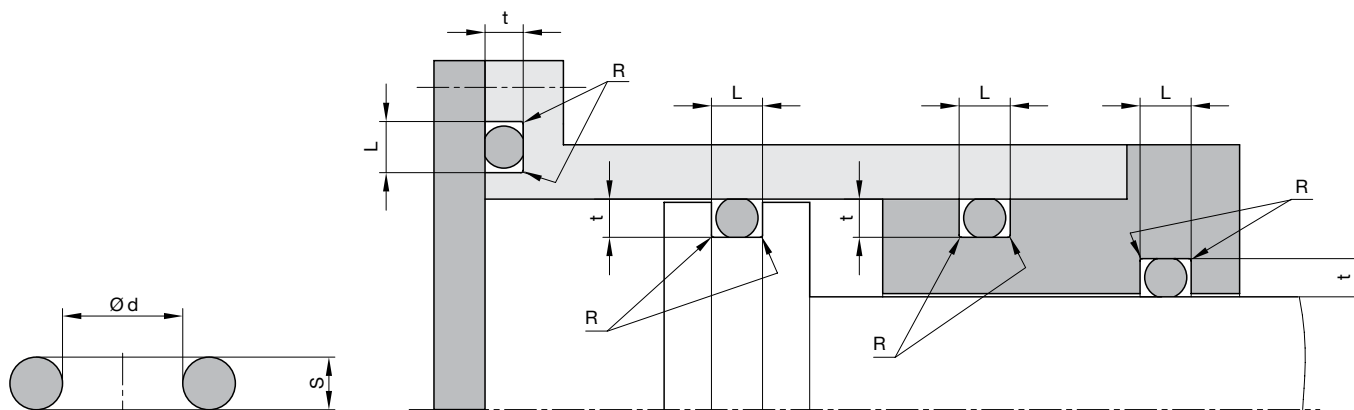


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Recommended interference

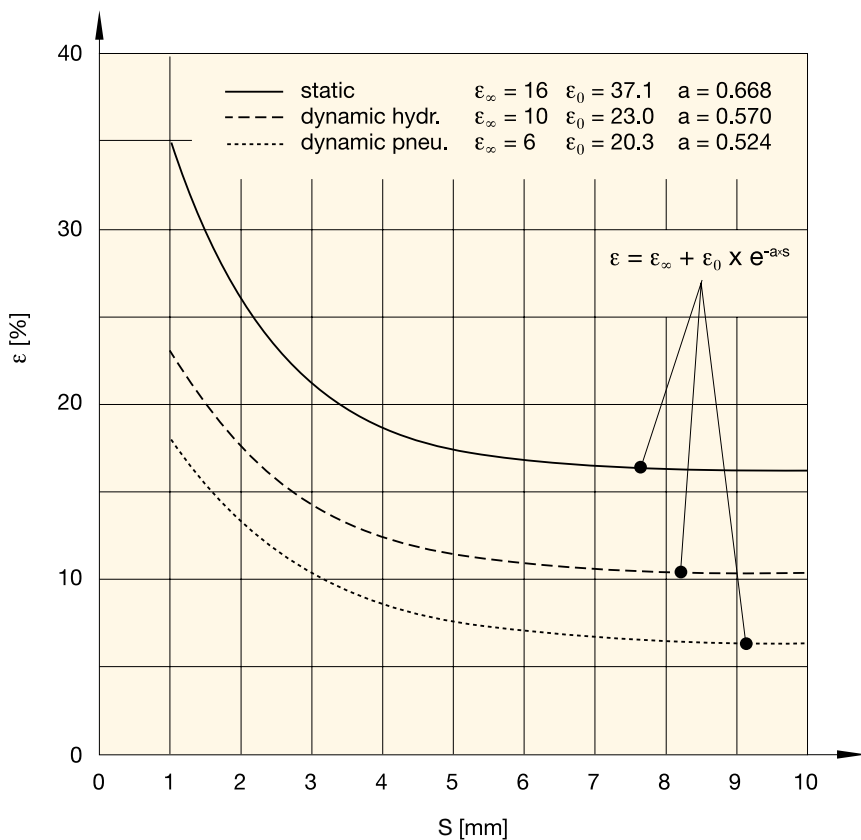

$$\epsilon \text{ [mm]: } \epsilon = \frac{V}{100} \cdot 100 \text{ [%]}$$


* Groove depth t = Back-up dimension t

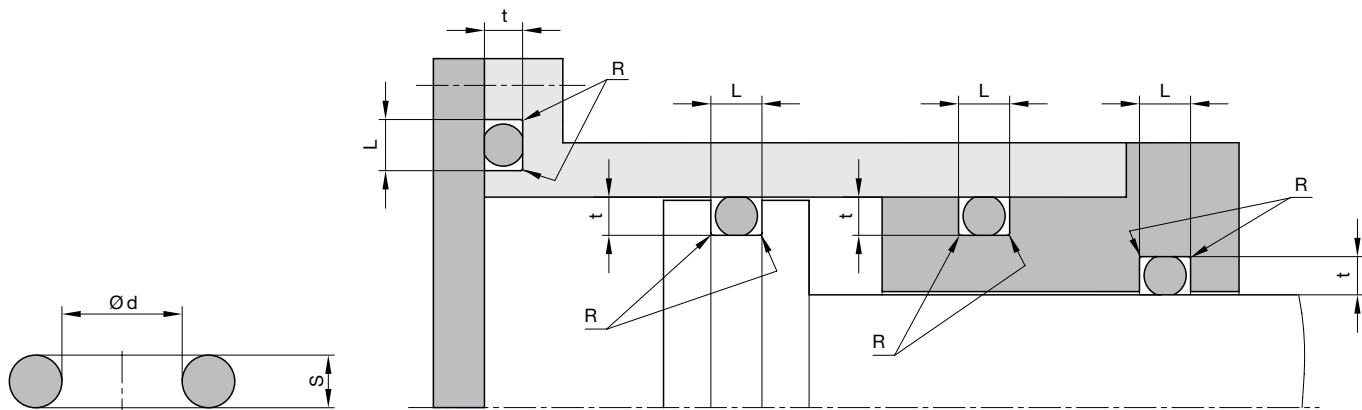

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | S | Order code | d | S | Order code |
|------|------|---------------|-------|------|---------------|
| 1.78 | 1.7 | V1 0067 P5008 | 10 | 2.5 | V1 1015 P5008 |
| 2.5 | 1.2 | V1 0110 P5008 | 10 | 3 | V1 1020 P5008 |
| 2.9 | 1.8 | V1 0140 P5008 | 10.3 | 2.4 | V1 1045 P5008 |
| 3 | 1.5 | V1 0151 P5008 | 10.77 | 2.62 | V1 1059 P5008 |
| 3.2 | 1.8 | V1 0166 P5008 | 10.82 | 1.78 | V1 1065 P5008 |
| 3.4 | 1.9 | V1 0180 P5008 | 11 | 2 | V1 1074 P5008 |
| 3.5 | 1.2 | V1 0185 P5008 | 11 | 3 | V1 1085 P5008 |
| 4 | 1.5 | V1 0208 P5008 | 11.3 | 2.4 | V1 1115 P5008 |
| 4 | 2 | V1 0212 P5008 | 11.3 | 2.5 | V1 1117 P5008 |
| 4.2 | 1.9 | V1 0235 P5008 | 12 | 2 | V1 1146 P5008 |
| 4.6 | 2 | V1 0263 P5008 | 12 | 2.5 | V1 1150 P5008 |
| 5 | 1.5 | V1 0285 P5008 | 12 | 3 | V1 1155 P5008 |
| 5 | 2 | V1 0291 P5008 | 12.1 | 2.7 | V1 1182 P5008 |
| 5 | 2.5 | V1 0294 P5008 | 12.3 | 2.4 | V1 1190 P5008 |
| 5.28 | 1.78 | V1 0305 P5008 | 12.37 | 2.62 | V1 1194 P5008 |
| 5.3 | 2.4 | V1 0310 P5008 | 12.42 | 1.78 | V1 1200 P5008 |
| 5.7 | 1.9 | V1 0320 P5008 | 13 | 2 | V1 1219 P5008 |
| 6 | 2 | V1 0335 P5008 | 13 | 3 | V1 1227 P5008 |
| 6.3 | 2.4 | V1 0362 P5070 | 13.3 | 2.4 | V1 1253 P5008 |
| 6.4 | 2 | V1 0367 P5008 | 13.3 | 2.5 | V1 1255 P5008 |
| 6.7 | 2 | V1 0379 P5008 | 13.94 | 2.62 | V1 1269 P5008 |
| 7 | 2 | V1 0397 P5008 | 14 | 1.78 | V1 1284 P5008 |
| 7 | 2.4 | V1 0399 P5008 | 14 | 2 | V1 1287 P5008 |
| 7.3 | 2.4 | V1 0430 P5008 | 14 | 3 | V1 1298 P5008 |
| 7.5 | 2 | V1 0443 P5008 | 14.03 | 2.61 | V1 1312 P5008 |
| 8 | 1.65 | V1 0484 P5008 | 15 | 3 | V1 1365 P5008 |
| 8 | 2 | V1 0485 P5008 | 15.3 | 2.4 | V1 1397 P5008 |
| 8 | 2.5 | V1 0490 P5008 | 15.54 | 2.62 | V1 1415 P5008 |
| 9 | 1.5 | V1 0562 P5008 | 15.6 | 1.78 | V1 1418 P5008 |
| 9 | 2 | V1 0566 P5008 | 16 | 2 | V1 1435 P5008 |
| 9.19 | 2.62 | V1 0603 P5008 | 16.2 | 2 | V1 1478 P5008 |
| 9.25 | 1.78 | V1 0615 P5008 | 16.3 | 2.4 | V1 1480 P5008 |
| 9.3 | 2.4 | V1 0620 P5008 | 16.4 | 2 | V1 1483 P5008 |
| 10 | 2 | V1 1010 P5008 | 16.9 | 2.7 | V1 1505 P5008 |


Further sizes on request.

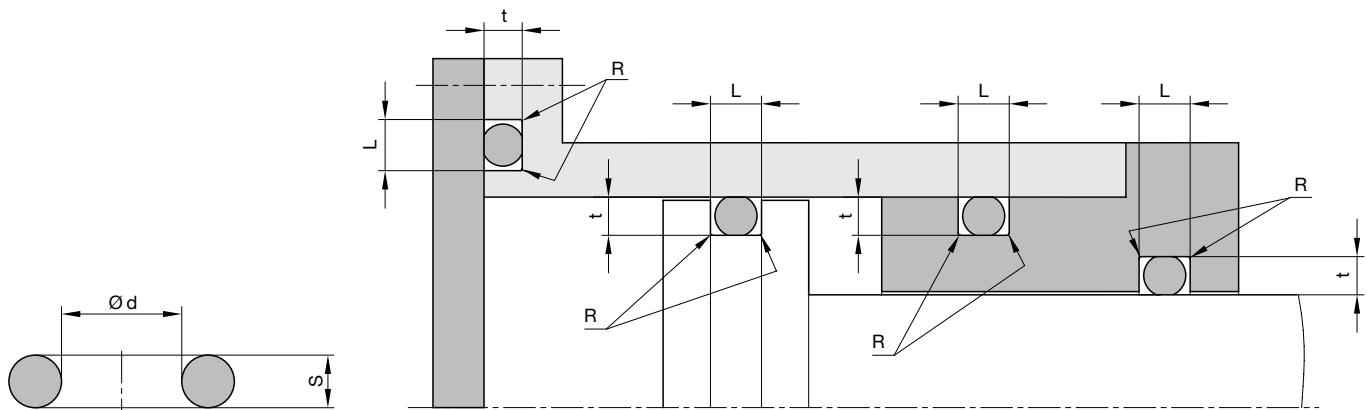

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | S | Order code | d | S | Order code |
|-------|------|---------------|-------|------|---------------|
| 17 | 2 | V1 1520 P5008 | 26.2 | 3 | V1 2540 P5008 |
| 17 | 3 | V1 1530 P5008 | 27 | 2.5 | V1 2575 P5008 |
| 17.12 | 2.62 | V1 1556 P5008 | 28 | 2 | V1 2620 P5008 |
| 18 | 2 | V1 1575 P5008 | 28 | 3 | V1 2630 P5008 |
| 18.2 | 3 | V1 1615 P5008 | 28 | 4 | V1 2640 P5008 |
| 18.4 | 2.7 | V1 1622 P5008 | 28.24 | 2.62 | V1 2664 P5008 |
| 18.64 | 3.53 | V1 1638 P5008 | 29.2 | 3 | V1 2742 P5008 |
| 18.72 | 2.62 | V1 1640 P5008 | 29.74 | 2.95 | V1 2764 P5008 |
| 19 | 2 | V1 1670 P5008 | 29.87 | 1.78 | V1 2780 P5008 |
| 19 | 2.5 | V1 1675 P5008 | 30 | 2 | V1 3010 P5008 |
| 19.2 | 3 | V1 1730 P5008 | 30.3 | 2.4 | V1 3073 P5008 |
| 19.3 | 2.4 | V1 1740 P5008 | 31.54 | 3.53 | V1 3145 P5008 |
| 19.4 | 2.1 | V1 1947 P5008 | 32 | 2 | V1 3158 P5008 |
| 20 | 2 | V1 2015 P5008 | 32 | 3 | V1 3168 P5008 |
| 20 | 2.5 | V1 2020 P5008 | 32 | 4 | V1 3178 P5008 |
| 20 | 3 | V1 2025 P5008 | 33 | 2 | V1 3220 P5008 |
| 20.3 | 2.4 | V1 2105 P5008 | 33 | 3.5 | V1 3235 P5008 |
| 21 | 3.53 | V1 2141 P5008 | 34.2 | 3 | V1 3351 P5008 |
| 21.3 | 2.4 | V1 2167 P5008 | 34.52 | 3.53 | V1 3361 P5008 |
| 21.3 | 3.6 | V1 2170 P5008 | 34.59 | 2.62 | V1 3355 P5008 |
| 21.82 | 3.53 | V1 2181 P5008 | 35 | 2 | V1 3370 P5008 |
| 21.95 | 1.78 | V1 2195 P5008 | 35 | 3 | V1 3380 P5008 |
| 22 | 1.5 | V1 2204 P5008 | 35.2 | 3 | V1 3415 P5008 |
| 22 | 2 | V1 2208 P5008 | 36 | 2 | V1 3430 P5008 |
| 22.2 | 3 | V1 2255 P5008 | 36 | 3.53 | V1 3446 P5008 |
| 23 | 2.5 | V1 2273 P5008 | 37.69 | 3.53 | V1 3579 P5008 |
| 23 | 3 | V1 2278 P5008 | 38 | 2 | V1 3595 P5008 |
| 23.47 | 2.62 | V1 2313 P5008 | 39 | 2 | V1 3650 P5008 |
| 24 | 2 | V1 2330 P5008 | 39.2 | 3 | V1 3683 P5008 |
| 24 | 2.5 | V1 2335 P5008 | 40 | 2 | V1 4015 P5008 |
| 24.99 | 3.53 | V1 2394 P5008 | 40.2 | 3 | V1 4077 P5008 |
| 25 | 2 | V1 2405 P5008 | 40.64 | 5.33 | V1 4086 P5008 |
| 25.2 | 3 | V1 2477 P5008 | 44 | 3 | V1 4305 P5008 |
| 26 | 2 | V1 2497 P5008 | 45 | 3 | V1 4400 P5008 |

Further sizes on request.

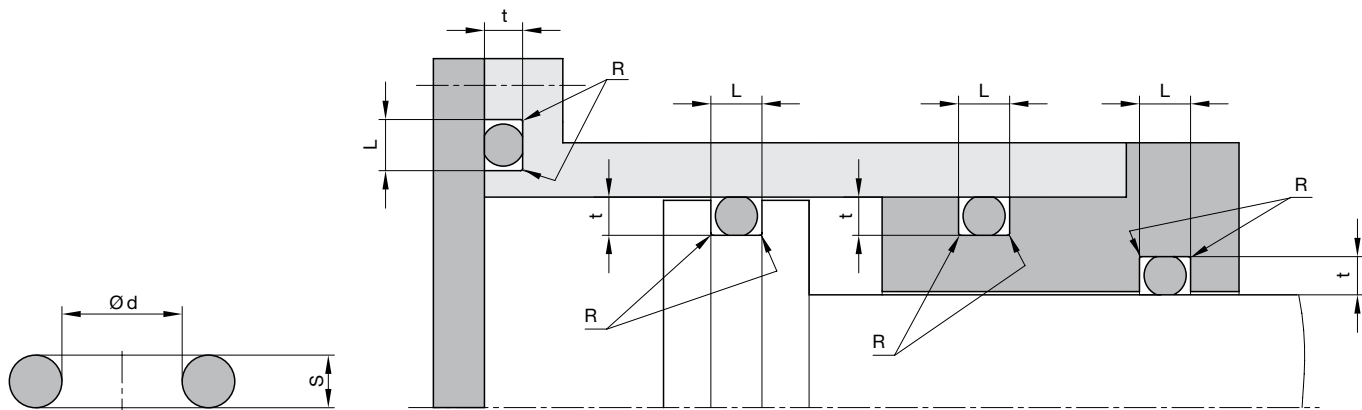

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | S | Order code | d | S | Order code |
|-------|------|---------------|--------|------|---------------|
| 46.99 | 5.33 | V1 4514 P5008 | 100 | 5.33 | V1 A043 P5008 |
| 48.9 | 2.62 | V1 4645 P5008 | 100.97 | 5.33 | V1 A089 P5008 |
| 50 | 2 | V1 5015 P5008 | 110 | 5 | V1 B030 P5008 |
| 50 | 3 | V1 5025 P5008 | 110.49 | 5.33 | V1 B066 P5008 |
| 50.16 | 5.33 | V1 5066 P5008 | 112 | 6 | V1 B117 P5008 |
| 50.2 | 3 | V1 5069 P5008 | 114.6 | 5.7 | V1 B216 P5008 |
| 53.34 | 5.33 | V1 5274 P5008 | 116.84 | 6.99 | V1 B297 P5030 |
| 54 | 3 | V1 5300 P5008 | 120 | 4 | V1 C030 P5008 |
| 55 | 4 | V1 5360 P5008 | 120 | 5 | V1 C040 P5008 |
| 56 | 3 | V1 5410 P5008 | 124.6 | 5.7 | V1 C307 P5008 |
| 56 | 6 | V1 5422 P5008 | 129.54 | 5.33 | V1 C480 P5008 |
| 59 | 3.53 | V1 5580 P5008 | 130 | 5.33 | V1 D039 P5008 |
| 59.69 | 5.33 | V1 5604 P5008 | 134.6 | 5.7 | V1 D185 P5008 |
| 60 | 3 | V1 6020 P5008 | 135 | 5 | V1 D205 P5008 |
| 60 | 4 | V1 6030 P5008 | 151.77 | 6.99 | V1 F085 P5030 |
| 60 | 5 | V1 6040 P5008 | 152 | 5 | V1 F123 P5008 |
| 64 | 3 | V1 6285 P5008 | 158 | 5.7 | V1 F292 P5008 |
| 65 | 5 | V1 6370 P5008 | 178 | 5.7 | V1 H240 P5008 |
| 66 | 5.33 | V1 6443 P5018 | 202.57 | 6.99 | V1 L073 P5008 |
| 68 | 3.53 | V1 6551 P5008 | 225 | 5 | V1 M135 P5008 |
| 69.21 | 5.33 | V1 6655 P5008 | | | |
| 69.52 | 2.62 | V1 6677 P5008 | | | |
| 70 | 3 | V1 7020 P5008 | | | |
| 70 | 5 | V1 7040 P5008 | | | |
| 75 | 3 | V1 7340 P5008 | | | |
| 75.8 | 3.53 | V1 7391 P5008 | | | |
| 80 | 3 | V1 8020 P5008 | | | |
| 80 | 5 | V1 8040 P5008 | | | |
| 82.14 | 3.53 | V1 8168 P5008 | | | |
| 85 | 5 | V1 8275 P5008 | | | |
| 89.2 | 5.7 | V1 8485 P5008 | | | |
| 90 | 5 | V1 9040 P5008 | | | |
| 91.4 | 5.33 | V1 9113 P5008 | | | |
| 95 | 5 | V1 9330 P5008 | | | |

Further sizes on request.



Polon® anti-extrusion rings (back-up rings) are used for static and dynamic applications in connection with O-rings, to prevent extrusion of the O-ring into the diametral clearance.

The single cut and spiral design rings are easily installed into closed grooves while the single solid design, recommended for highest pressures, is for installation in open groove.

Polon® anti-extrusion rings for O-rings are available in three versions:

- XA: Single turn continuous
- XB: Single turn scarf cut
- XC: Spiral cut

- Insensitive to pressure peaks.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Any desired nominal diameter available due to use of machining technique.
- Installation in closed and undercut housings.

Range of application

We recommend to specify anti-extrusion rings when at least one of the following working conditions is present in cases where the intention is to seal with O-rings only:

- Pressure above 70 bar (7MPa)
- Diametral clearance exceeding 0.25 mm at $p > 10$ bar (1MPa)
- High stroke frequency
- High temperatures
- Contaminated medium
- Strong pressure pulsing or pressure changes

Compounds

Polon® 001, virgin PTFE.

Installation

In case of single-acting O-rings, it is sufficient to install only one anti-extrusion ring on the leeside of the O-rings. In case of double-acting sealing, two anti-extrusion rings are required.

Installation grooves should basically be produced with a rectangular cross-section (parallel side walls). If this for machining reasons is impossible, max. deviation of 5° is allowed.

A spiral anti-extrusion ring consists of two spiral windings which are cut at the ends and allows for compensating for large temperature variations and tolerances by means of a screw-like elongation or contraction. Only to be used in reciprocating applications.

In case of single-acting O-rings, it is sufficient to install only one anti-extrusion ring on the downstream side of the O-ring. In case of a double-acting sealing function, two anti-extrusion rings are required at each side of the O-ring.


Installation grooves should preferably be made with parallel side walls. If for machining reasons this is not possible, a maximum deviation of 5° is allowed.

Anti-extrusion rings with concave face on the O-ring side are recommended in case of wide or out-of-tolerance bores and shafts. Additionally, this type of anti-extrusion ring extends the operating pressure of the O-ring and its specific shape tends to keep the O-ring round, even under high-pressure, resulting in better seal performance.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

¹⁾ Scarf-cut rings are required for installation in partially or fully closed-grooves.


²⁾ XA: single solid, XB: single cut, XC: spiral cut

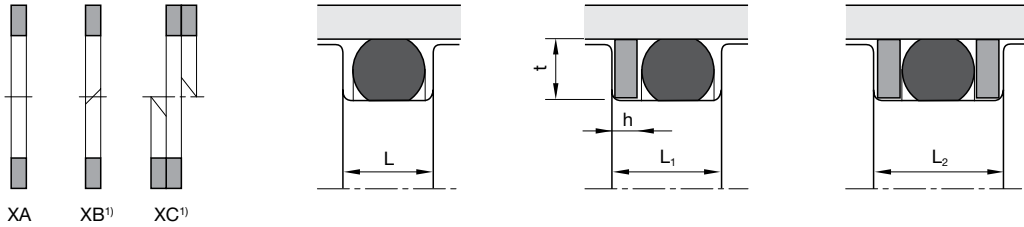

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Housing dimensions

| Series no. | Series no. | Series no. | Cross-section | O-ring cross-section | Anti-extrusion ring | Groove depth | | | Groove width | | |
|------------|------------|------------|---------------|----------------------|---------------------|-----------------------|-----------------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | | | static | dynamic hydraulic | dynamic pneumatic | without anti-extrusion ring | one anti-extrusion ring | two anti-extrusion rings |
| XA | XB | XC | | | h | (X) | (Y) | (Z) | L | | |
| | | | | (mm) | (mm) | | t | | (mm) | | |
| 0901 | 0902 | 0903 | A | 1.78 | 1.0 ^{±0.1} | 1.30 ^{±0.05} | 1.45 ^{±0.02} | 1.55 ^{±0.02} | 2.4 ^{+0.2} _{-0.0} | 3.4 ^{+0.2} _{-0.0} | 4.4 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | B | 2.00 | 1.0 ^{±0.1} | 1.50 ^{±0.05} | 1.65 ^{±0.02} | 1.75 ^{±0.02} | 2.7 ^{+0.2} _{-0.0} | 3.7 ^{+0.2} _{-0.0} | 4.7 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | C | 2.40 | 1.5 ^{±0.1} | 1.85 ^{±0.05} | 2.00 ^{±0.02} | 2.10 ^{±0.02} | 3.3 ^{+0.2} _{-0.0} | 4.7 ^{+0.2} _{-0.0} | 6.1 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | D | 2.50 | 1.5 ^{±0.1} | 1.95 ^{±0.05} | 2.10 ^{±0.02} | 2.20 ^{±0.02} | 3.4 ^{+0.2} _{-0.0} | 4.9 ^{+0.2} _{-0.0} | 6.4 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | E | 2.62 | 1.5 ^{±0.1} | 2.05 ^{±0.05} | 2.25 ^{±0.02} | 2.35 ^{±0.02} | 3.6 ^{+0.2} _{-0.0} | 5.1 ^{+0.2} _{-0.0} | 6.6 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | F | 3.00 | 1.5 ^{±0.1} | 2.40 ^{±0.05} | 2.55 ^{±0.02} | 2.70 ^{±0.02} | 4.2 ^{+0.2} _{-0.0} | 5.7 ^{+0.2} _{-0.0} | 7.2 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | G | 3.53 | 1.5 ^{±0.1} | 2.85 ^{±0.07} | 3.10 ^{±0.05} | 3.25 ^{±0.05} | 4.8 ^{+0.2} _{-0.0} | 6.3 ^{+0.2} _{-0.0} | 7.8 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | H | 4.00 | 1.5 ^{±0.1} | 3.25 ^{±0.07} | 3.50 ^{±0.05} | 3.65 ^{±0.05} | 5.4 ^{+0.2} _{-0.0} | 6.9 ^{+0.2} _{-0.0} | 8.4 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | I | 5.00 | 2.0 ^{±0.1} | 4.15 ^{±0.10} | 4.45 ^{±0.05} | 4.65 ^{±0.05} | 6.8 ^{+0.2} _{-0.0} | 8.8 ^{+0.2} _{-0.0} | 10.8 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | J | 5.33 | 2.0 ^{±0.1} | 4.40 ^{±0.10} | 4.70 ^{±0.05} | 4.90 ^{±0.05} | 7.2 ^{+0.2} _{-0.0} | 9.2 ^{+0.2} _{-0.0} | 11.2 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | K | 5.70 | 2.0 ^{±0.1} | 4.70 ^{±0.10} | 5.10 ^{±0.05} | 5.30 ^{±0.05} | 7.7 ^{+0.2} _{-0.0} | 9.9 ^{+0.2} _{-0.0} | 12.0 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | L | 6.99 | 2.5 ^{±0.1} | 5.85 ^{±0.10} | 6.25 ^{±0.05} | 6.55 ^{±0.05} | 9.6 ^{+0.2} _{-0.0} | 12.1 ^{+0.2} _{-0.0} | 14.6 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | M | 8.40 | 2.5 ^{±0.1} | 7.00 ^{±0.10} | 7.55 ^{±0.05} | 7.90 ^{±0.05} | 11.5 ^{+0.2} _{-0.0} | 14.6 ^{+0.2} _{-0.0} | 17.6 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | N | 1.78 | 1.4 ^{±0.1} | 1.30 ^{±0.05} | 1.45 ^{±0.02} | 1.55 ^{±0.02} | 2.4 ^{+0.2} _{-0.0} | 3.8 ^{+0.2} _{-0.0} | 5.2 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | O | 2.00 | 1.4 ^{±0.1} | 1.50 ^{±0.05} | 1.65 ^{±0.02} | 1.75 ^{±0.02} | 2.7 ^{+0.2} _{-0.0} | 4.1 ^{+0.2} _{-0.0} | 5.5 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | P | 2.40 | 1.4 ^{±0.1} | 1.80 ^{±0.05} | 2.05 ^{±0.02} | 2.10 ^{±0.02} | 3.2 ^{+0.2} _{-0.0} | 4.6 ^{+0.2} _{-0.0} | 6.0 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | Q | 2.50 | 1.4 ^{±0.1} | 1.90 ^{±0.05} | 2.15 ^{±0.02} | 2.20 ^{±0.02} | 3.3 ^{+0.2} _{-0.0} | 4.7 ^{+0.2} _{-0.0} | 6.1 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | R | 2.62 | 1.4 ^{±0.1} | 2.00 ^{±0.05} | 2.25 ^{±0.02} | 2.35 ^{±0.02} | 3.6 ^{+0.2} _{-0.0} | 5.0 ^{+0.2} _{-0.0} | 6.4 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | T | 3.00 | 1.4 ^{±0.1} | 2.30 ^{±0.05} | 2.60 ^{±0.02} | 2.70 ^{±0.02} | 4.0 ^{+0.2} _{-0.0} | 5.4 ^{+0.2} _{-0.0} | 6.8 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | U | 3.53 | 1.4 ^{±0.1} | 2.70 ^{±0.07} | 3.10 ^{±0.05} | 3.25 ^{±0.05} | 4.8 ^{+0.2} _{-0.0} | 6.2 ^{+0.2} _{-0.0} | 7.6 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | V | 4.00 | 1.4 ^{±0.1} | 3.10 ^{±0.07} | 3.50 ^{±0.05} | 3.65 ^{±0.05} | 5.5 ^{+0.2} _{-0.0} | 6.9 ^{+0.2} _{-0.0} | 8.6 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | W | 5.00 | 1.7 ^{±0.1} | 4.00 ^{±0.10} | 4.40 ^{±0.05} | 4.65 ^{±0.05} | 6.6 ^{+0.2} _{-0.0} | 8.3 ^{+0.2} _{-0.0} | 10.0 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | X | 5.33 | 1.7 ^{±0.1} | 4.30 ^{±0.10} | 4.70 ^{±0.05} | 4.90 ^{±0.05} | 7.1 ^{+0.2} _{-0.0} | 8.8 ^{+0.2} _{-0.0} | 10.5 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | Y | 5.70 | 1.7 ^{±0.1} | 4.60 ^{±0.10} | 5.00 ^{±0.05} | 5.30 ^{±0.05} | 7.2 ^{+0.2} _{-0.0} | 8.9 ^{+0.2} _{-0.0} | 10.6 ^{+0.2} _{-0.0} |
| 0901 | 0902 | 0903 | Z | 6.99 | 2.5 ^{±0.1} | 5.80 ^{±0.10} | 6.10 ^{±0.05} | 6.55 ^{±0.05} | 9.5 ^{+0.2} _{-0.0} | 12.0 ^{+0.2} _{-0.0} | 14.5 ^{+0.2} _{-0.0} |

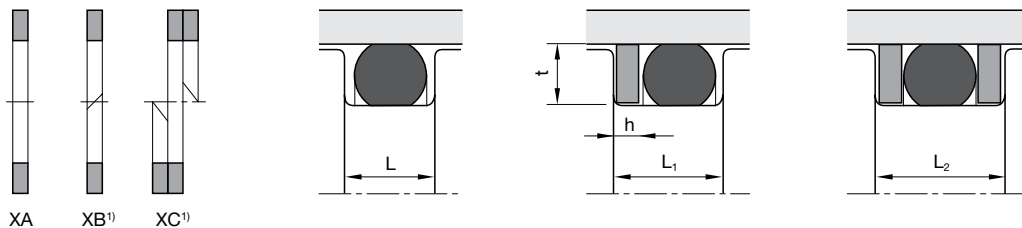

¹) Scarf-cut rings are required for installation in partially or fully closed-grooves.

²) XA: single solid, XB: single cut, XC: spiral cut

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example

Groove outer diameter 100 mm

O-ring 2.5 mm
 Design XA (endless)
 Application static

XA 1000 001 0901X D (96.1 × 100 × 1.5)

XA Profile
 1000 Groove outer diameter × 10
 001 Compound
 0901X Series no.
 0901X static
 0901Y dynamic hydraulic
 0901Z dynamic pneumatic
 D Cross-section

Ordering example

Groove inner diameter 60 mm

Groove outer diameter OD = ID + 2S
 O-ring 5.33 mm
 Design XB (single cut)
 Application dynamic hydraulic

XB 0694 001 0902Y J (60 × 69.4 × 2)

XB Profile
 0694 Groove outer diameter × 10
 001 Compound
 0902Y Series no.
 0902X static
 0902Y dynamic hydraulic
 0902Z dynamic pneumatic
 J Cross-section



The HS static radial seal made of polyurethane compounds was developed as an alternative to conventionally used O-ring/back-up ring combinations for static sealing applications at high pressures. The robust, symmetrical seal geometry and the utilization of particularly extrusion-resistant Parker polyurethane compounds not only facilitates installation but increases sealing performance in conditions of pulsating pressures as well, resulting in clearly longer service life.

The benefits of the HS seal result from the serial configuration of the two sealing areas, which doubles the protection against leakage compared to a single seal. In addition, with two sealing areas or sealing edge pairs backing up the seal, exceptional protection against twisting of the seal is achieved, both during installation and in operation at pulsating pressures, for instance in combination with breathing components and coaxiality defects of the groove.

The use of particularly extrusion-resistant materials, especially the P6000 polyurethane compound with 94 Shore A hardness, eliminates the need for back-up rings.

- Robust seal profile for harshest operating conditions.
- Insensitive to pressure peaks.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Installation in closed and undercut housings.
- Additional sizes of machined products available on short notice.

Range of application

The Ultrathan® seal HS is suitable for radial, static applications at high pressures such as hydraulic valves and cylinders, machine tools, injection-moulding machines.

| | |
|-----------------------|-------------------------|
| Operating pressure | ≤ 600 bar ¹⁾ |
| Operating temperature | -35 °C to +110 °C |

¹⁾ With reduced extrusion gap and suitable cross-section.

Compounds

Ultrathan® P5008 compound is a Parker material based on polyurethane with a hardness of approx. 94 Shore A.


For media containing water, we recommend our hydrolysis resistant compound P5001.

Installation

The seals should not be pulled over sharp edges during installation.

Normally these seals may be snapped into closed grooves. Where access is restricted special assembly tools may be required. Proposals for the design of such tools will be provided on request.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

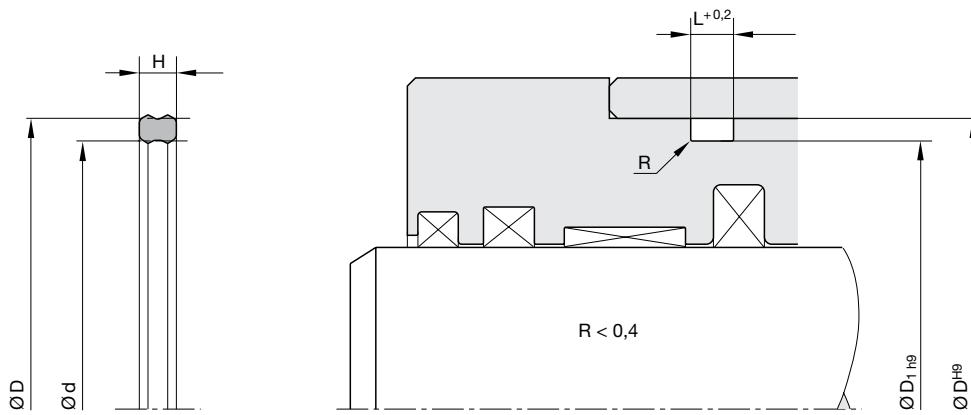

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | D ₁ | H | L | Order code |
|-------|----------------|------|-----|---------------|
| 31.75 | 27.6 | 4.8 | 5.8 | HS 2731 P5009 |
| 32 | 27.8 | 3.84 | 4.7 | HS 2732 P5009 |
| 36.5 | 32.4 | 2.8 | 3.2 | HS 3632 P6000 |
| 39.67 | 35.3 | 3.84 | 4.7 | HS 3539 P5009 |
| 40 | 34.4 | 4 | 5 | HS 4034 P6000 |
| 42 | 36.4 | 4 | 5 | HS 4236 P6000 |
| 45 | 40 | 4.4 | 5.4 | HS 4550 P6000 |
| 48 | 42.3 | 4.3 | 5.3 | HS 4840 P6000 |
| 48 | 43 | 3.2 | 4 | HS 4843 P6000 |
| 50 | 44.4 | 4.6 | 5.6 | HS 5044 P6000 |
| 50 | 45.8 | 3.6 | 4.4 | HS 5045 P5009 |
| 52 | 32.3 | 3.84 | 4.7 | HS 3252 P5009 |
| 55 | 50 | 4.3 | 5.3 | HS 5550 P6000 |
| 57 | 52.2 | 3.3 | 4.1 | HS 5752 P6000 |
| 60 | 54.3 | 4.6 | 5.6 | HS 6054 P6000 |
| 63 | 57.4 | 4.2 | 5.2 | HS 5763 P6000 |
| 65 | 59.4 | 4 | 5 | HS 6559 P6000 |
| 68 | 62.7 | 4 | 5 | HS 6862 P6000 |
| 70 | 65 | 4 | 5 | HS 7065 P6000 |
| 72 | 66.4 | 4 | 5 | HS 7266 P6000 |
| 75 | 69.4 | 4.6 | 5.6 | HS 7569 P6000 |
| 76.2 | 70.2 | 4.8 | 5.8 | HS 7670 P6000 |
| 80 | 73.6 | 6 | 7 | HS 8073 P6000 |
| 80 | 74.4 | 4.8 | 5.8 | HS 8074 P6000 |
| 84.7 | 78.58 | 4 | 5 | HS 8478 P6000 |
| 85 | 79.4 | 4.5 | 5.5 | HS 8579 P6000 |
| 90 | 83 | 5.5 | 6.5 | HS 9083 P6000 |
| 100 | 94.5 | 4.7 | 5.7 | HS A094 P6000 |
| 110 | 101.4 | 8 | 9 | HS B110 P6000 |

Further sizes on request.



The OV flange seal made of polyurethane compounds was developed as an alternative to conventionally used O-ring/back-up ring combinations for static sealing at high pressures. The robust seal geometry and use of particularly extrusion-resistant Parker polyurethane compounds simplifies installation and enhances sealing performance in pulsating pressure conditions, resulting in significantly longer service life. The OV flange seal is particularly suitable for SAE flanges and inferior surface qualities of the flange components. Due to the interference fit, the geometric design of the flange seal prevents the otherwise frequent occurrence of O-ring “pumping.”

Leakage which has been observed when O-rings are used can be attributed to a pressure buildup on the outer diameter which occurs with pressure surges and pressure fluctuations, frequently causing O-rings to be pulled out of their seats and being carried off by the fluid flow. This profile and the recommended groove prevent this effect. A radial movement and the wear it entails, which may occur with O-rings, is avoided by the special shape of the OV seal.

- Enhanced sealing performance in non-pressurized conditions.
- Insensitive to pressure peaks.
- Seal geometry prevents pressure build-up on low-pressure side in case of pressure peaks.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Installation in closed and undercut housings.
- Interference fit on the outer diameter enables overhead installation.
- Additional sizes of machined products available on short notice.

Range of application

Static seal for SAE flanges.

| | |
|-----------------------|-------------------|
| Operating pressure | ≤ 600 bar |
| Operating temperature | -35 °C to +100 °C |


Compounds

Ultrathan® P5008 is a polyurethane-based Parker compound with a hardness of approx. 93 Shore A. In comparison with other polyurethane materials currently available on the market it excels because of its increased heat resistance, improved performance against hydrolysis, and low compression set values.

Installation

The installation groove at the back of the sealing element must be ventilated. The peak-to-valley height of the seal orientated plate surface must be $R_t \leq 6.3 \mu\text{m}$, whereas the plate with the countersink must have a peak-to-valley height of $R_t = 2030 \mu\text{m}$, e.g. obtained by milling according to DIN 3142 B5P4. If there are several passage bores, additional ventilation channels can be provided between the oil supply bores.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

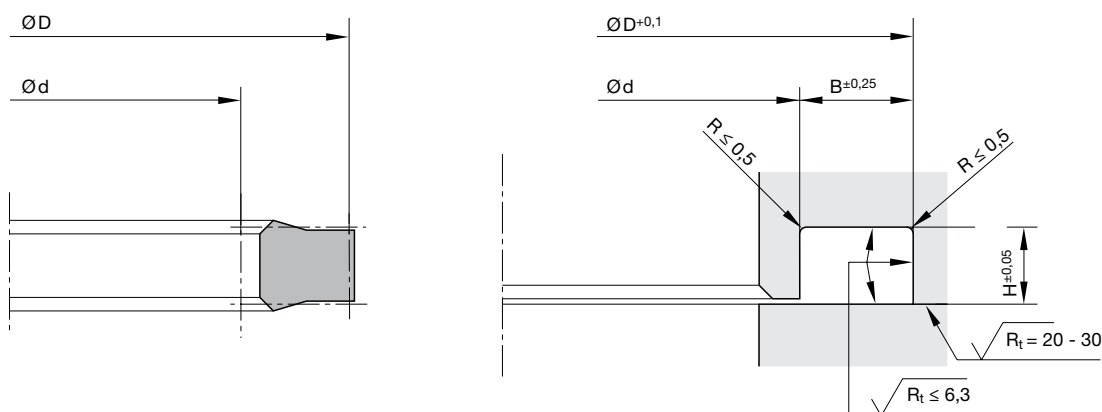

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | B | SAE flange size | Order code |
|-------|-------|------|-----|-----------------|---------------|
| 17 | 25.4 | 2.85 | 4.2 | 1/2" | OV 1704 P5008 |
| 23.4 | 31.8 | 2.85 | 4.2 | 3/4" | OV 2308 P5008 |
| 26.3 | 33.5 | 2.2 | 3.6 | - | OV 2630 P5008 |
| 31.3 | 39.7 | 2.85 | 4.2 | 1" | OV 3106 P5008 |
| 36.1 | 44.5 | 2.85 | 4.2 | 1 1/4" | OV 3605 P5008 |
| 36.2 | 45 | 3.3 | 4.4 | - | OV 3606 P5008 |
| 45.4 | 53.8 | 2.85 | 4.2 | 1 1/2" | OV 4527 P5008 |
| 55 | 63.4 | 2.85 | 4.2 | 2" | OV 5540 P5008 |
| 67.8 | 76.2 | 2.85 | 4.2 | 2 1/2" | OV 6776 P5008 |
| 83.55 | 91.95 | 2.85 | 4.2 | 3" | OV 8355 P5008 |

Further sizes on request.

Precision seals for rotary applications

The construction machinery and general mobile equipment industries require efficient rotary transmissions for hydraulic fluids. This applies in all cases where the use of hoses is not practicable for reasons of safety, function or lack of space.

Parker took into consideration the compact design of these rotary transmissions and designed equally compact sealing elements which can be snapped into simple grooves.

There are two different types of rotary seals: For the stator with dynamic sealing on the inside, and for the rotor with dynamic sealing on the outside diameter of the seal.

Care must be taken to ensure that the high pressure channels are placed towards the center, while the return, the low pressure, the control, and the leakage channels are placed towards the end (atmospheric side) of the rotor. This will ensure that the highly stressed high pressure seals are lubricated and cooled from both sides, and that no contamination may penetrate from outside. Due to the reciprocal pressure load, the back-up rings will also be sufficiently lubricated.

As the end seals are subjected to low pressure only, the problem of contamination and abrasion is here of minor importance.


Please contact our application engineering department before installing a continuously rotating transmission.

The $P \cdot v$ -value

It is a basic principle that the higher the operating pressure, the lower the allowable peripheral speed, and vice versa. In this context, the characteristic value $P \cdot v$ should be mentioned. As a product of pressure [bar] and speed [m/s], it marks the upper limit of allowable loading.

The $P \cdot v$ -value varies for different types of seals and is stated for every profile on the respective catalogue page (working conditions).

These values represent an estimation on the basis of many years of experience, and are based on normal operating conditions. Expressed in another way, in isolated cases these values can be considerably lower, e.g. when the temperature is very high or when a very poor lubricant is used. Additionally, the prescribed limits regarding pressure and speed must be observed.

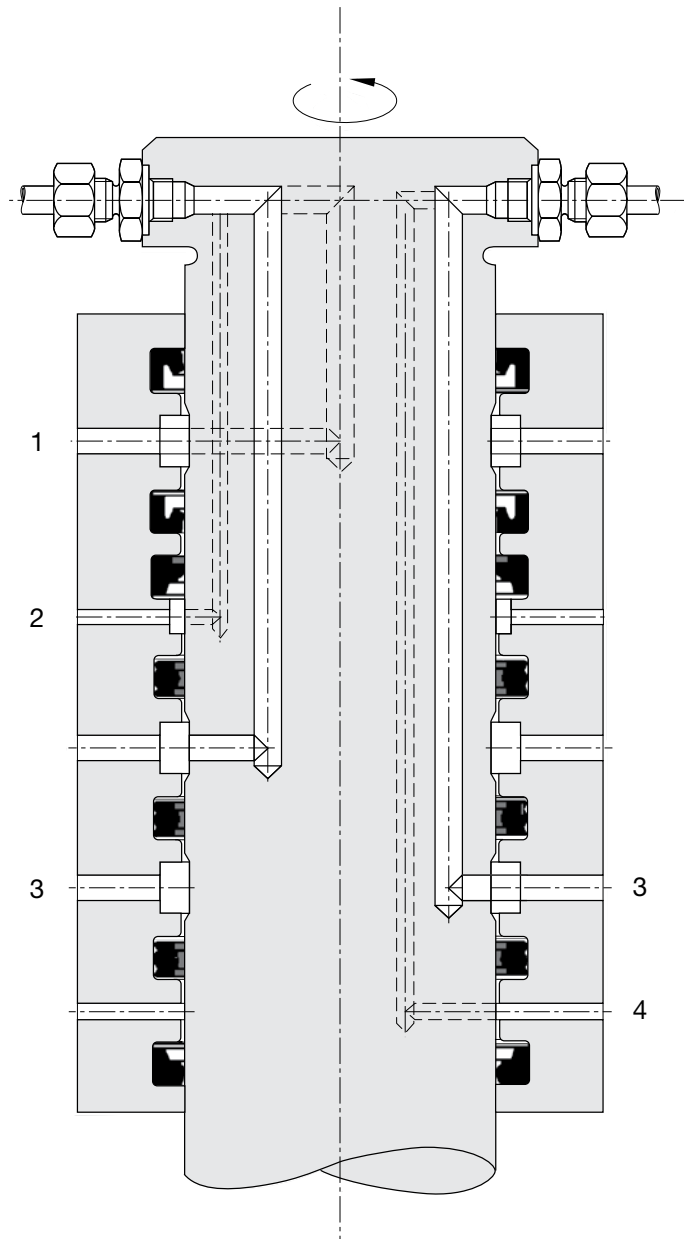

- 1 = Pneumatic pressure
- 2 = Pilot pressure
- 3 = System pressure
- 4 = Drain or return pressure



The KA rotary sealing set is a compact seal for sealing the high-pressure channels of rotary transmissions. It consists of a rubber element with a fabric-reinforced running surface and two anti-extrusion rings. They increase stability and prevent extrusion into the gap which due to the rotary motion (eccentricity) is variable in most cases. Due to the special shape of the dynamic sealing area, a lubricant deposit is formed which ensures the preservation of the liquid film and thereby prevents dry running.

- Enhanced sealing performance in non-pressurized conditions.
- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Insensitive to pressure peaks.
- High temperature resistance in case of suitable compound selection.
- Extremely high extrusion resistance.
- Installation in closed and undercut housings.

Range of application

Mainly for applications where the pressure alternates from one side of the seal to the other, such as pivots for rotating track rings, swivel joints, hose reels, and in machine tool hydraulics.

| | |
|-----------------------|-------------------|
| Operating pressure | |
| ≤ 60 °C | ≤ 400 bar |
| ≤ 80 °C | ≤ 315 bar |
| ≤ 100 °C | ≤ 250 bar |
| Operating temperature | -30 °C to +100 °C |
| Sliding speed | ≤ 0.2 m/s |

Recommendation for rotary transmissions: $P \cdot v \leq 50$
(For definition see catalogue „Hydraulic Seals”, chapter „Rotary seals”, introduction.)


Compounds

Standard compound for the sealing part is a NBR-based elastomer with fabric-reinforced dynamic surface (Z5011/Z5014). The back-up rings are made of a polyamid-based material.

Installation

The profile KA rotary sealing sets are designed to be snapped into closed grooves. Special versions for open grooves in endseal applications are available. During installation, first the sealing part must be installed, followed by the back-up ring. To avoid damaging the seal, sharp edges within the installation area should be removed.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

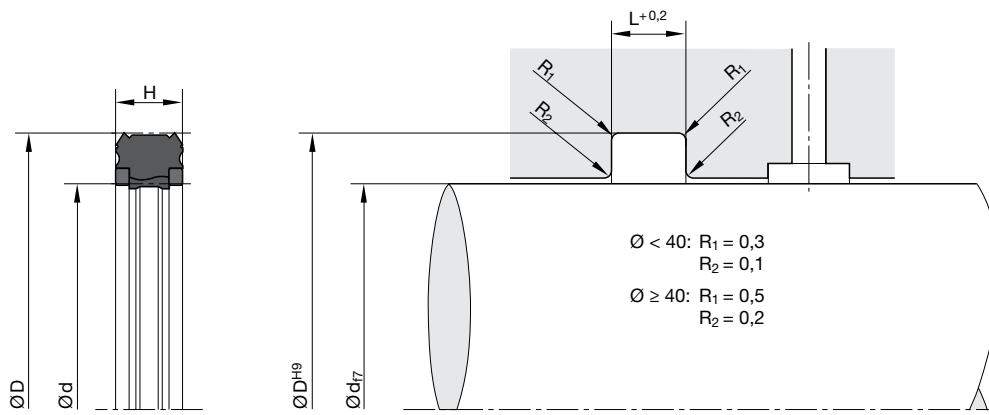

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | H | L | Order code |
|-----|-----|------|------|---------------|
| 30 | 42 | 6 | 7 | KA 0030 00650 |
| 50 | 62 | 7.5 | 8.5 | KA 0050 00650 |
| 65 | 77 | 6 | 7 | KA 0065 00650 |
| 89 | 106 | 8.5 | 9.5 | KA 0089 00650 |
| 90 | 106 | 10 | 11 | KA 0092 00650 |
| 90 | 110 | 10 | 11 | KA 0090 00650 |
| 90 | 110 | 11 | 12 | KA 0091 00650 |
| 90 | 110 | 12 | 13 | KA 0093 00650 |
| 95 | 112 | 10 | 11 | KA 0087 00650 |
| 95 | 115 | 11 | 12 | KA 0088 00650 |
| 100 | 120 | 11 | 12 | KA 0100 00650 |
| 100 | 120 | 12 | 13 | KA 0101 00650 |
| 105 | 125 | 11 | 12 | KA 0104 00650 |
| 109 | 129 | 10 | 11 | KA 0109 00650 |
| 110 | 130 | 10 | 11 | KA 0110 00650 |
| 125 | 145 | 12 | 13 | KA 0125 00650 |
| 130 | 145 | 10 | 11 | KA 0128 00650 |
| 130 | 150 | 10 | 11 | KA 0132 00650 |
| 160 | 180 | 10 | 11 | KA 0161 00650 |
| 180 | 200 | 10 | 11 | KA 0181 00650 |
| 200 | 220 | 10 | 11 | KA 0200 00650 |
| 200 | 225 | 15 | 16 | KA 0201 00650 |
| 210 | 235 | 12.5 | 13.5 | KA 0211 00650 |
| 262 | 292 | 15 | 16 | KA 0262 00650 |

Further sizes on request.



The internally sealing OR sealing set featuring a Slipper Seal® design consists of a PTFE rotor sealing ring and an elastomer O-ring as a pre-loading element.

It is particularly suitable for alternating sealing of rotary transmissions for slewing rings, swivel drives, hose reels, and in machine tool hydraulics. If the sealing set is used as an end seal, it is recommended to install a double wiper ring at the end of the components. Due to the special operating conditions of rotary transmissions, the OR rotor sealing sets are provided with one or two circumferential lubrication grooves.

Due to the material combination of the slide ring (PTFE) and O-ring (elastomer), this product is suitable for a wide range of applications, especially for aggressive media and/or high temperatures. Alternatively, several compounds can be selected, depending on the specific applications profile.

- Good sealing performance in extremely small assembly conditions.
- Excellent wear resistance.
- Minimal break-away and dynamic friction and no stick-slip tendency ensures uniform motion even at low speeds.
- Good energy efficiency due to low friction.
- Insensitive to pressure peaks.
- High temperature resistance assured by suitable O-ring compound selection.
- Improved lubrication due to pressure medium deposit in the dynamic contact area.
- High extrusion resistance.
- Adaptable to nearly all media thanks to high chemical resistance of the sealing ring and large O-ring compound selection.
- Short axial assembly length.
- Installation in closed and undercut housings.
- Available in diameters from 4 to 4500 mm.
- Additional sizes of machined products available on short notice.

Range of application

| | |
|-----------------------|---------------------------------|
| Operating pressure | ≤ 300 bar |
| Operating temperature | -30 °C to +100 °C ¹⁾ |
| Sliding speed | ≤ 1 m/s |

Recommendation for rotary transmissions: $P \times v \leq 25$ (40)
(For definition see catalogue „Hydraulic Seals“, chapter „Rotary Seals“, introduction.)

¹⁾With deviation from standard temperature range, please contact our consultancy service for adequate O-ring compound.

Compounds

Sealing ring: Polon® 033, modified PTFE + 25 % carbon.


O-ring: N0674, NBR elastomer with approx. 70 Shore A.

Installation

For diameters < 30 mm open grooves are required.

This seal should only be used in combination with closed guiding elements.


In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

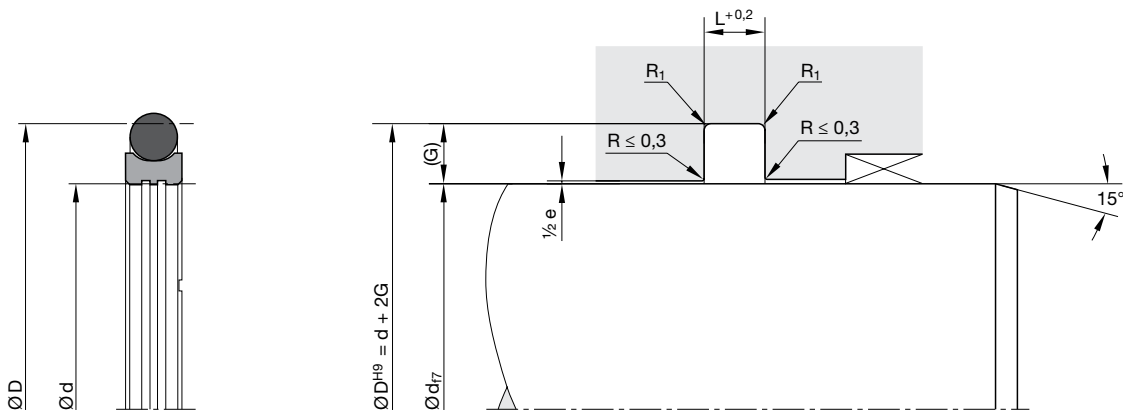

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Housing dimensions

| Series no. | Cross-section | O-ring cross-section (mm) | Recommended shaft Ø range | | Groove width L (mm) | Groove depth G (mm) | Gap max. 0200 bar e (mm) | Gap max. 200-400 bar e (mm) | Radius max. R ₁ (mm) |
|------------|---------------|---------------------------|---------------------------|----------|---------------------|---------------------|--------------------------|-----------------------------|---------------------------------|
| | | | ≥ d (mm) | < d (mm) | | | | | |
| 00160 | A | 1.78 | 4 | 8 | 2.2 | 2.45 | 0.4 - 0.2 | 0.2 - 0.1 | 0.5 |
| 00160 | B | 2.62 | 8 | 19 | 3.2 | 3.75 | 0.4 - 0.2 | 0.2 - 0.1 | 0.5 |
| 00160 | C | 3.53 | 19 | 38 | 4.2 | 5.50 | 0.6 - 0.3 | 0.3 - 0.2 | 0.5 |
| 00160 | D | 5.33 | 38 | 200 | 6.3 | 7.75 | 0.8 - 0.4 | 0.4 - 0.2 | 0.9 |
| 00160 | E | 6.99 | 200 | 256 | 8.1 | 10.50 | 1 - 0.5 | 0.5 - 0.3 | 0.9 |
| 00160 | F | 6.99 | 256 | 650 | 8.1 | 12.25 | 1 - 0.5 | 0.5 - 0.3 | 0.9 |
| 00160 | G | 8.40 | 650 | 1000 | 9.5 | 14.00 | 1 - 0.5 | 0.5 - 0.3 | 0.9 |

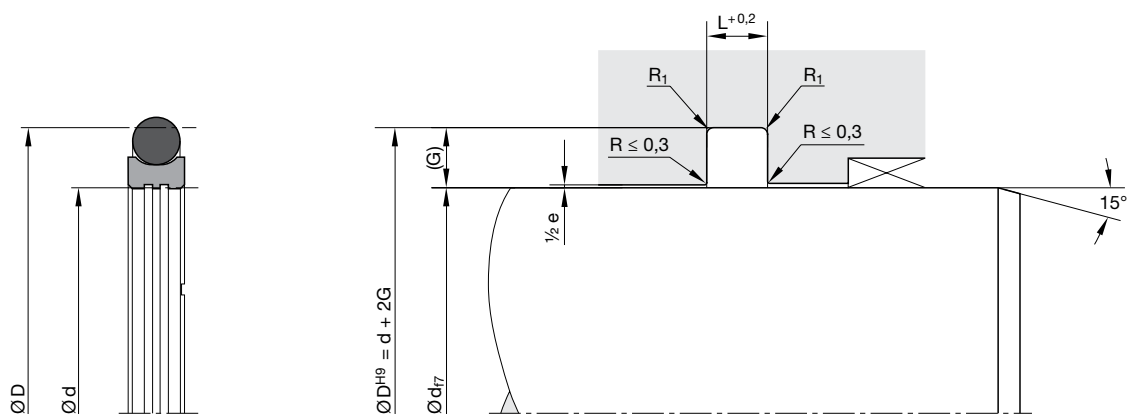

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example


Shaft diameter 80 mm

OR 0800 033 00161 D (80 × 95.5 × 6.3)

| | | | | |
|-------|-----------------------------------|----------------|--------------------------|---------------|
| OR | Profile | | | |
| 0800 | Shaft diameter × 10 | | | |
| 033 | Compound | | | |
| 00161 | Series no. / compound code O-ring | | | |
| | 00160 | without O-ring | | |
| | 00161 | N0674 (NBR) | 70 ^{±5} Shore A | -30 / +110 °C |
| | 00162 | V0747 (FKM) | 75 ^{±5} Shore A | -25 / +200 °C |
| | 00163 | N0756 (NBR) | 75 ^{±5} Shore A | -50 / +110 °C |
| | 00164 | E0540 (EPDM) | 80 ^{±5} Shore A | -30 / +110 °C |
| | 00165 | N3578 (NBR) | 75 ^{±5} Shore A | -30 / +110 °C |
| | 00166 | N0552 (NBR) | 90 ^{±5} Shore A | -30 / +100 °C |
| | 00167 | N1173 (HNBR) | 70 ^{±5} Shore A | -30 / +150 °C |
| D | Cross-section | | | |

Please note:

For certain applications, it might be convenient to use a non-standard cross-section reduced or heavier. In these cases, please replace the standard cross-section code (in above example: „D“) by the one you require (for example „C“ or „E“).

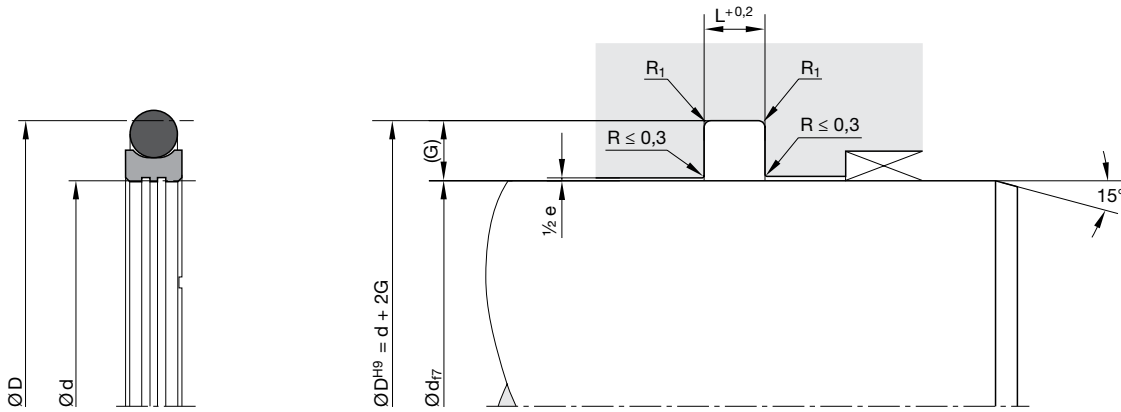


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Standard range

| Size | Groove | | | O-ring | | |
|------|-------------|-------------|-----------|--------|------------|------------|
| | Ø d (mm) | Ø D (mm) | L (mm) | No. | CS (mm) | ID (mm) |
| 0040 | 4 | 8.90 | 2.20 | 2-010 | 1.78 | 6.07 |
| 0060 | 6 | 10.90 | 2.20 | 2-011 | 1.78 | 7.65 |
| 0080 | 8 | 12.90 | 3.20 | 2-012 | 1.78 | 9.25 |
| 0100 | 10 | 14.90 | 3.20 | 2-013 | 1.78 | 10.82 |
| 0120 | 12 | 16.90 | 3.20 | 2-015 | 1.78 | 14.00 |
| 0140 | 14 | 18.90 | 3.20 | 2-016 | 1.78 | 15.60 |
| 0160 | 16 | 20.90 | 3.20 | 2-017 | 1.78 | 17.17 |
| 0170 | 17 | 21.90 | 3.20 | 2-018 | 1.78 | 18.77 |
| 0180 | 18 | 22.90 | 3.20 | 2-019 | 1.78 | 20.35 |
| 0190 | 19 | 26.50 | 4.20 | 2-118 | 2.62 | 21.89 |
| 0200 | 20 | 27.50 | 4.20 | 2-119 | 2.62 | 23.47 |
| 0220 | 22 | 29.50 | 4.20 | 2-120 | 2.62 | 25.07 |
| 0240 | 24 | 31.50 | 4.20 | 2-121 | 2.62 | 26.64 |
| 0250 | 25 | 32.50 | 4.20 | 2-122 | 2.62 | 28.24 |
| 0270 | 27 | 34.50 | 4.20 | 2-123 | 2.62 | 29.82 |
| 0280 | 28 | 35.50 | 4.20 | 2-124 | 2.62 | 31.41 |
| 0300 | 30 | 37.50 | 4.20 | 2-125 | 2.62 | 32.99 |
| 0320 | 32 | 39.50 | 4.20 | 2-126 | 2.62 | 34.59 |
| 0330 | 33 | 40.50 | 4.20 | 2-127 | 2.62 | 36.17 |
| 0350 | 35 | 42.50 | 4.20 | 2-128 | 2.62 | 37.77 |
| 0360 | 36 | 43.50 | 4.20 | 2-129 | 2.62 | 39.34 |
| 0370 | 37 | 44.50 | 4.20 | 2-130 | 2.62 | 40.94 |
| 0380 | 38 | 49 | 6.30 | 2-223 | 3.53 | 40.87 |
| 0400 | 40 | 51 | 6.30 | 2-224 | 3.53 | 44.04 |
| 0420 | 42 | 53 | 6.30 | 2-225 | 3.53 | 47.22 |
| 0450 | 45 | 56 | 6.30 | 2-226 | 3.53 | 50.39 |
| 0480 | 48 | 59 | 6.30 | 2-227 | 3.53 | 53.57 |
| 0500 | 50 | 61 | 6.30 | 2-228 | 3.53 | 56.74 |
| 0550 | 55 | 66 | 6.30 | 2-229 | 3.53 | 59.92 |
| 0600 | 60 | 71 | 6.30 | 2-230 | 3.53 | 63.09 |

| Size | Groove | | | O-ring | | |
|------|-------------|-------------|-----------|--------|------------|------------|
| | Ø d (mm) | Ø D (mm) | L (mm) | No. | CS (mm) | ID (mm) |
| 0630 | 63 | 74 | 6.30 | 2-231 | 3.53 | 66.27 |
| 0650 | 65 | 76 | 6.30 | 2-232 | 3.53 | 69.44 |
| 0700 | 70 | 81 | 6.30 | 2-233 | 3.53 | 72.62 |
| 0750 | 75 | 86 | 6.30 | 2-235 | 3.53 | 78.97 |
| 0800 | 80 | 91 | 6.30 | 2-237 | 3.53 | 85.32 |
| 0850 | 85 | 96 | 6.30 | 2-238 | 3.53 | 88.49 |
| 0900 | 90 | 101 | 6.30 | 2-240 | 3.53 | 94.84 |
| 0950 | 95 | 106 | 6.30 | 2-242 | 3.53 | 101.19 |
| 1000 | 100 | 111 | 6.30 | 2-243 | 3.53 | 104.37 |
| 1100 | 110 | 121 | 6.30 | 2-246 | 3.53 | 113.89 |
| 1200 | 120 | 131 | 6.30 | 2-249 | 3.53 | 123.42 |
| 1300 | 130 | 141 | 6.30 | 2-252 | 3.53 | 132.94 |
| 1400 | 140 | 151 | 6.30 | 2-255 | 3.53 | 142.47 |
| 1500 | 150 | 161 | 6.30 | 2-258 | 3.53 | 151.99 |
| 1600 | 160 | 171 | 6.30 | 2-260 | 3.53 | 164.69 |
| 1700 | 170 | 181 | 6.30 | 2-261 | 3.53 | 171.04 |
| 1800 | 180 | 191 | 6.30 | 2-263 | 3.53 | 183.74 |
| 1900 | 190 | 201 | 6.30 | 2-264 | 3.53 | 190.09 |
| 2000 | 200 | 215.50 | 8.10 | 2-369 | 5.33 | 202.57 |
| 2100 | 210 | 225.50 | 8.10 | 2-371 | 5.33 | 215.27 |
| 2200 | 220 | 235.50 | 8.10 | 2-372 | 5.33 | 221.62 |
| 2300 | 230 | 245.50 | 8.10 | 2-374 | 5.33 | 234.32 |
| 2400 | 240 | 255.50 | 8.10 | 2-375 | 5.33 | 240.67 |
| 2500 | 250 | 265.50 | 8.10 | 2-377 | 5.33 | 253.37 |
| 2560 | 256 | 277 | 8.10 | 2-449 | 6.99 | 253.37 |
| 2600 | 260 | 281 | 8.10 | 2-450 | 6.99 | 266.07 |
| 2700 | 270 | 291 | 8.10 | 2-451 | 6.99 | 278.77 |
| 2800 | 280 | 301 | 8.10 | 2-451 | 6.99 | 278.77 |
| 2900 | 290 | 311 | 8.10 | 2-452 | 6.99 | 291.47 |
| 3000 | 300 | 321 | 8.10 | 2-453 | 6.99 | 304.17 |

Further sizes on request.

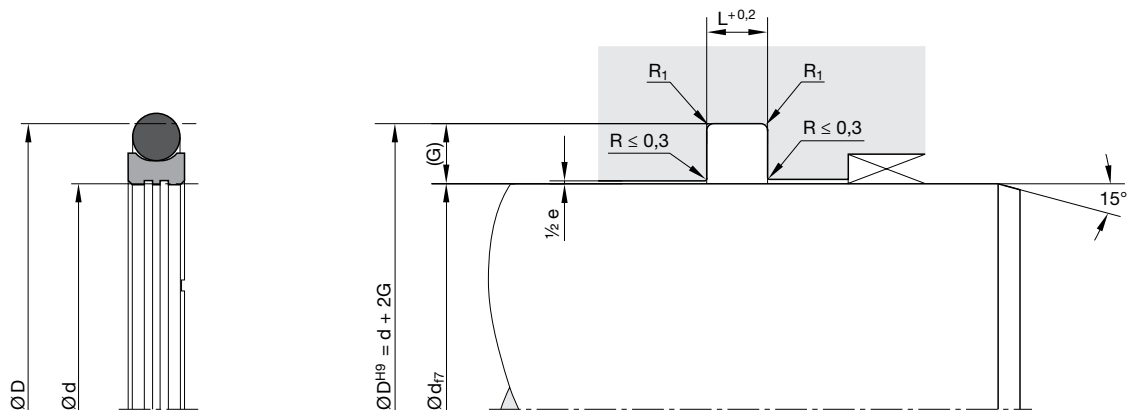

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| Size | Groove | | | O-ring | | |
|------|-------------------------|-------------------------|-----------|--------|------------|------------|
| | $\varnothing d$ (mm) | $\varnothing D$ (mm) | L (mm) | No. | CS (mm) | ID (mm) |
| 3100 | 310 | 331 | 8.10 | 2-454 | 6.99 | 316.87 |
| 3200 | 320 | 241 | 8.10 | 2-455 | 6.99 | 329.57 |
| 3300 | 330 | 351 | 8.10 | 2-456 | 6.99 | 342.27 |
| 3400 | 340 | 361 | 8.10 | 2-457 | 6.99 | 354.97 |
| 3500 | 350 | 371 | 8.10 | 2-457 | 6.99 | 354.97 |
| 3600 | 360 | 281 | 8.10 | 2-458 | 6.99 | 367.67 |
| 3700 | 370 | 391 | 8.10 | 2-459 | 6.99 | 380.37 |
| 3800 | 380 | 401 | 8.10 | 2-460 | 6.99 | 393.07 |
| 3900 | 390 | 411 | 8.10 | 2-461 | 6.99 | 405.26 |
| 4000 | 400 | 421 | 8.10 | 2-461 | 6.99 | 405.26 |
| 4200 | 420 | 431 | 8.10 | 2-462 | 6.99 | 430.66 |
| 4500 | 450 | 471 | 8.10 | 2-465 | 6.99 | 456.06 |
| 4700 | 470 | 491 | 8.10 | 2-467 | 6.99 | 481.46 |
| 5000 | 500 | 521 | 8.10 | 2-469 | 6.99 | 506.86 |
| 5300 | 530 | 551 | 8.10 | 2-470 | 6.99 | 532.26 |
| 5500 | 550 | 571 | 8.10 | 2-471 | 6.99 | 557.66 |
| 5800 | 580 | 601 | 8.10 | 2-472 | 6.99 | 582.68 |
| 6000 | 600 | 621 | 8.10 | 2-473 | 6.99 | 608.08 |
| 6200 | 620 | 641 | 8.10 | 2-473 | 6.99 | 608.08 |
| 6400 | 640 | 661 | 8.10 | 2-474 | 6.99 | 633.48 |
| 6500 | 650 | 678 | 9.50 | - | 8.40 | 649 |
| 8000 | 800 | 828 | 9.50 | - | 8.40 | 810 |

Further sizes on request.



The RS rotary sealing set consists of a high-strength thermoplastic slide ring with particularly stable thermal properties and an elastomer preloading element. The special contact surface geometry at the inner diameter of the slide ring with the patented (EP 0 643 243 B2) alternating pitch has a major beneficial effect on the lubrication of the seal. This has a positive impact on both friction and wear. The preloading element responsible for the static sealing function has a rectangular cross section. Compared to O-rings, this has advantages with regard to contact load (sealing) and deformation behavior (pumping inside the groove). The dynamic interior sealing method is preferable. We do not recommend a dynamic exterior sealing arrangement. The slide ring compound used and its geometry allow use of the seal even under maximum permissible pressure (and in case of pressure peaks) without requiring additional anti-extrusion rings. At the same time, it is possible to take maximum advantage of the diameter play between rotor and stator without any functional impairment. In principle, the seal can also be used as an exterior end seal. In case of doubt, however, we recommend our C5 or C9 product series.

- Enhanced sealing performance in non-pressurized conditions.
- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Long service life thanks to application-optimized compounds.
- Insensitive to pressure peaks.
- Improved lubrication due to pressure medium deposit in the dynamic contact area.
- Extremely high extrusion resistance.
- Installation in closed and undercut housings.

Range of application

Primarily for alternating sealing of rotary applications in rotating tracks, pivot drives, hose reels, and in machine tool hydraulics.

| | |
|-----------------------|-------------------|
| Operating pressure | ≤ 500 bar |
| Operating temperature | -35 °C to +100 °C |
| Sliding speed | ≤ 0.5 m/s |

Recommendation for rotary transmissions:

$$P \times v \leq 40 \text{ for } L = 4.1 \text{ to } 4.2$$

$$P \times v \leq 70 \text{ for } L = 6.0 \text{ to } 6.3$$

(For definition see catalogue „Hydraulic Seals“, chapter „Rotary Seals“, introduction.)

Compounds


The standard compound for the slide ring is a thermoplastic compound (W5071) with outstanding physical properties.

The expander ring consists of our tried and proven standard NBR compound N3571 with 70 Shore A. For higher temperatures, we recommend HNBR compounds.

Installation

The axial fit of the seal is especially narrow and suitable for grooves conforming to DIN ISO 7425. This benefits the total installation length of the rotary transmissions. By selecting suitable compounds, snap installation depending on profile width down to rotor diameter of app. 30 mm is possible. Below that, we recommend axially open grooves for installation.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

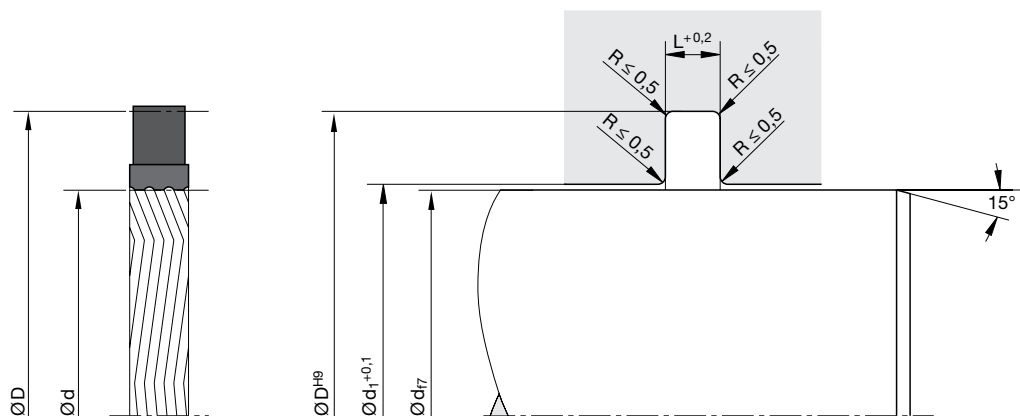

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| d | D | L | Order code |
|-----|-------|-----|---------------|
| 25 | 32.5 | 3.2 | RS 0025 00716 |
| 45 | 51.6 | 4.1 | RS 0045 00716 |
| 50 | 61 | 4.1 | RS 0050 00716 |
| 55 | 61.6 | 4.1 | RS 0055 00716 |
| 60 | 71 | 4.1 | RS 0060 00716 |
| 80 | 91 | 4.1 | RS 0080 00716 |
| 95 | 110.5 | 6.3 | RS 0095 00716 |
| 100 | 111 | 4.1 | RS 0100 00716 |
| 105 | 120.4 | 6.2 | RS 0105 00716 |
| 110 | 121 | 4.2 | RS 0110 00716 |
| 124 | 139.2 | 6.1 | RS 0124 00716 |
| 125 | 135.4 | 5.1 | RS 0125 00716 |
| 145 | 160 | 6.2 | RS 0145 00716 |
| 160 | 171.7 | 5.7 | RS 0160 00716 |
| 170 | 185.2 | 6.2 | RS 0170 00716 |
| 250 | 265.5 | 6.3 | RS 0250 00716 |

Further sizes on request.



The KS piston sealing set made of wear-resistant Ultrathan® has been developed specifically for sealing floating pistons in dual media piston-type accumulators. It consists of two U-rings with differences in terms of design and compound. The shape of the seals makes the KS piston sealing set ideally suited for reliable, low-friction separation of different pressure fluids (oil/gas). Other applications include industrial shock absorbers and hydro-pneumatic elements such as feed and braking units, pressure converters, pressure transducers and working cylinders.

- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Assembly on one-part piston is possible.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Dimensions according to ISO 5597.
- Installation in closed and undercut housings.
- Additional sizes of machined products available on short notice.

Range of application

| | |
|-----------------------|---|
| Operating pressure | ≤ 350 bar |
| Operating temperature | -30 °C to +80 °C |
| Sliding speed | ≤ 3 m/s |
| Media | Hydraulic oils based on mineral oil and gases |


Compounds

Parker polyurethane Ultrathan® P5008 is used for the oil side seal and polyurethane Ultrathan® P5010 is used for the gas side. When compared to commercial polyurethanes both these compounds have a superior resistance to high temperature and lower compression set values.

Installation

The performance of profile KS piston seal set is only guaranteed when the green colour seal (KH ... P5008) is installed on the oil side of the piston and the red colour seal (KG ... P5010) on the gas side. The general recommendations as shown in our hydraulics brochure are applicable to the housing groove and seal installation, e. g. no sharp edges, no sharp tools, clean components, etc.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

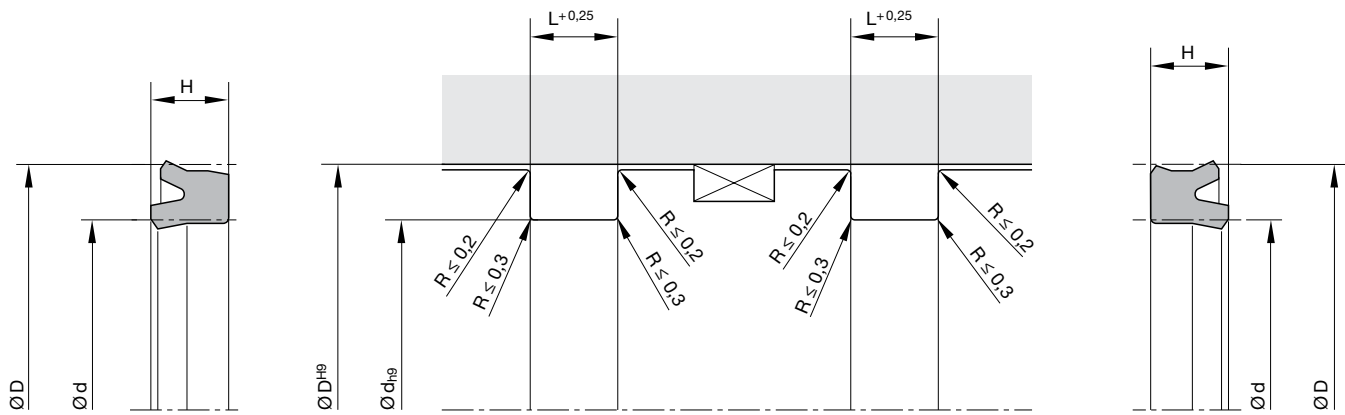

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

| D | d | H | L | ISO ¹⁾ | Order code |
|-------|-------|------|------|-------------------|---------------|
| 32 | 24 | 5.7 | 6.3 | | KS 0032 00710 |
| 40 | 32 | 5.7 | 6.3 | · | KS 0040 00710 |
| 50 | 40 | 7.3 | 8 | · | KS 0050 00710 |
| 63 | 53 | 7.3 | 8 | · | KS 0063 00710 |
| 80 | 65 | 11.4 | 12.5 | · | KS 0080 00710 |
| 85.73 | 70.73 | 11.4 | 12.5 | | KS 0086 00710 |
| 100 | 85 | 11.4 | 12.5 | · | KS 0100 00710 |
| 160 | 140 | 14.5 | 16 | · | KS 0160 00714 |
| 180 | 160 | 14.5 | 16 | | KS 0180 00710 |

1) ISO 5597
Further sizes on request.

Parker Prädifa Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates,
Dubai

Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener
Neustadt

Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku

Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia

Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany

Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup

Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid

Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa

Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens

Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs

Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin

Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker

Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

RO – Romania, Bucharest

Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow

Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul

Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

US – USA, Cleveland

Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

CN – China, Shanghai

Tel: +86 21 2899 5000

HK – Hong Kong

Tel: +852 2428 8008

IN – India, Mumbai

Tel: +91 22 6513 7081-85

JP – Japan, Tokyo

Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul

Tel: +82 2 559 0400

MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG – Singapore

Tel: +65 6887 6300

TH – Thailand, Bangkok

Tel: +662 186 7000

TW – Taiwan, Taipei

Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos

Tel: +55 800 727 5374

CL – Chile, Santiago

Tel: +56 2 623 1216

MX – Mexico, Toluca

Tel: +52 72 2275 4200



WARNING:

These products can expose you to chemicals including carbon black (airborne and extracts), antimony trioxide, titanium dioxide, silica (crystalline), di(2-ethylhexyl)phthalate, ethylene thiourea, acrylonitrile, 1,3-butadiene, epichlorohydrin, toluenediisocyanate, tetrafluoroethylene, ethylbenzene, formaldehyde, furfuryl alcohol, glass fibers, methyl isobutyl ketone, nickel (metallic and compounds), lead and lead compounds which are known to the State of California to cause cancer; and 1,3-butadiene, epichlorohydrin, di(2-ethylhexyl)phthalate, di-isodecyl phthalate, ethylene thiourea, methyl isobutyl ketone, methanol, toluene, lead and lead compounds which are known to the State of California to cause birth defects and other reproductive harm. For more information go to www.P65Warnings.ca.gov.